



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**TPR-Houston Port**

Machine Id  
**6354 6354**

Component  
**Transmission (Auto)**

Fluid  
**CHEVRON SYNTHETIC ATF HEAVY DUTY (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DJJ0018944</b>	DJJ0023558	DJJ0018949
Sample Date		Client Info		<b>05 Apr 2024</b>	19 Feb 2024	13 Nov 2023
Machine Age	hrs	Client Info		<b>17890</b>	17614	16443
Oil Age	hrs	Client Info		<b>500</b>	10000	0
Filter Age	hrs	Client Info		<b>500</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Changed	N/A
Filter Changed		Client Info		<b>Not Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>19</b>	20	41
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>1</b>	0	0
Lead	ppm	ASTM D5185m	>50	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>225	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	<b>5</b>	5	5
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	3	2
Boron	ppm	ASTM D5185m		<b>110</b>	105	81
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>1</b>	2	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>6</b>	11	2
Calcium	ppm	ASTM D5185m		<b>66</b>	152	76
Phosphorus	ppm	ASTM D5185m		<b>263</b>	229	209
Zinc	ppm	ASTM D5185m		<b>37</b>	75	52
Sulfur	ppm	ASTM D5185m		<b>4549</b>	2942	2819
Visc @ 40°C	cSt	ASTM D445	35.3	<b>36.3</b>	35.5	32.8

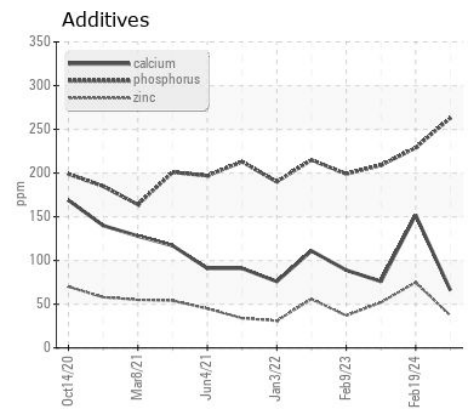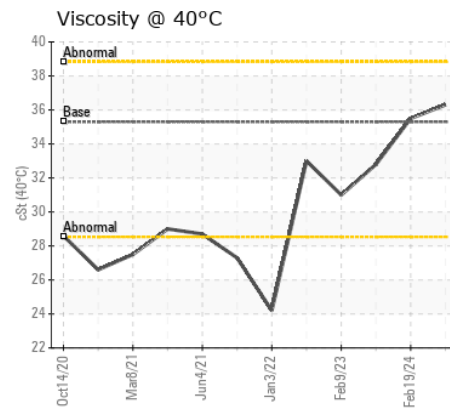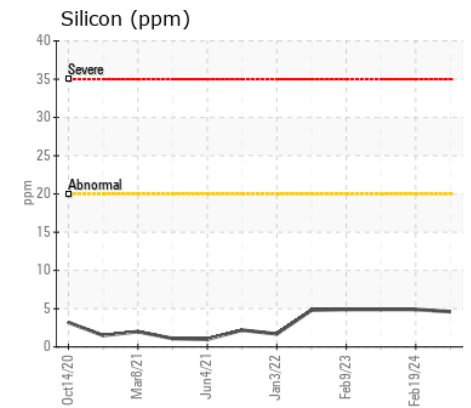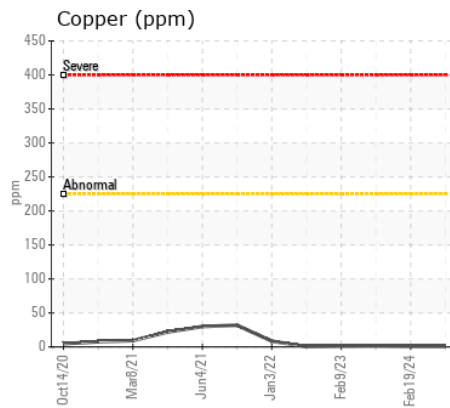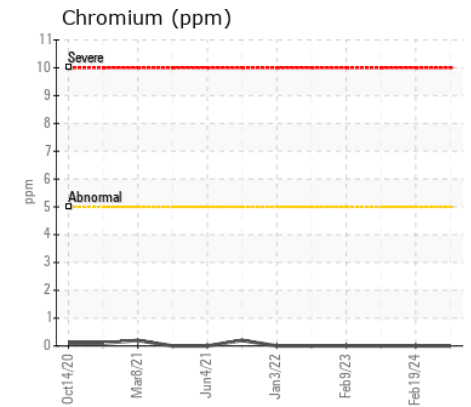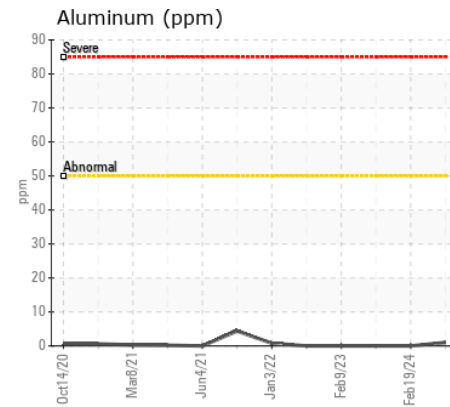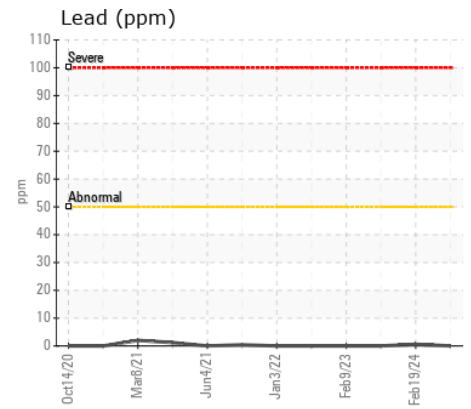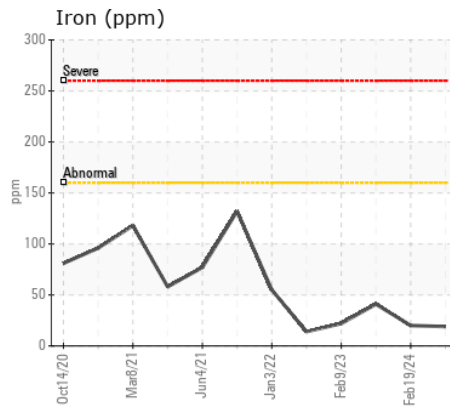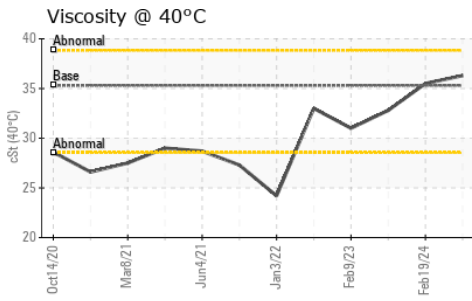

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DJJ0018944  
**Lab Number** : 06146270  
**Unique Number** : 10976348  
**Test Package** : MOBCE

**Received** : 11 Apr 2024  
**Tested** : 12 Apr 2024  
**Diagnosed** : 12 Apr 2024 - Wes Davis

**TEXAS PORT RECYCLING - HOUSTON PORT**  
 8945 MANCHESTER ST  
 HOUSTON, TX  
 US 77012  
 Contact: Dale Shaw  
 dale.shaw@tmrecycling.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (713)921-5545