



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HC2203
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 5W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0873150	WC0687300	WC0823662
Sample Date		Client Info		05 Apr 2024	27 Oct 2023	28 Sep 2023
Machine Age	hrs	Client Info		0	6036	5964
Oil Age	hrs	Client Info		0	0	244
Filter Age	hrs	Client Info		0	0	244
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<1	2	7
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>20	2	3	0
Lead	ppm	ASTM D5185m	>40	<1	<1	<1
Copper	ppm	ASTM D5185m	>330	<1	5	2
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	7	9	7
Potassium	ppm	ASTM D5185m	>20	3	0	1
Fuel		WC Method	>5	<1.0	<1.0	0.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.4	8.0	6.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.0	33.6	14.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>44	15	17	0
Boron	ppm	ASTM D5185m	250	184	170	11
Barium	ppm	ASTM D5185m	10	2	14	0
Molybdenum	ppm	ASTM D5185m	100	7	36	32
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	234	734	443
Calcium	ppm	ASTM D5185m	3000	1984	1648	▲ 697
Phosphorus	ppm	ASTM D5185m	1150	1011	1090	▲ 583
Zinc	ppm	ASTM D5185m	1350	1185	1227	▲ 719
Sulfur	ppm	ASTM D5185m	4250	4057	2998	2202
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.0	38.2	10.7
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.1	8.7	7.1
Visc @ 100°C	cSt	ASTM D445	14.4	14.4	13.1	▲ 4.3


FT-IR (Direct Trend)

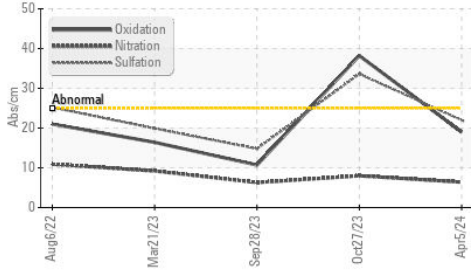


Ferrous Alloys

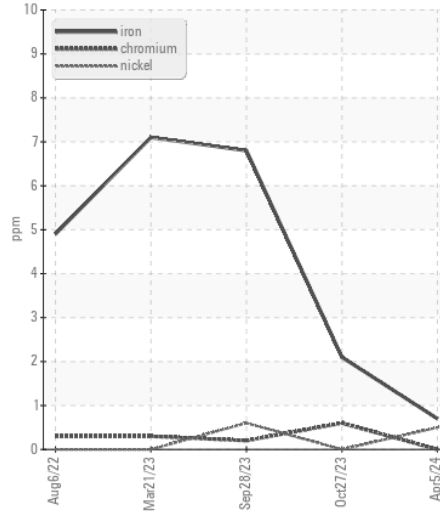


Base Number

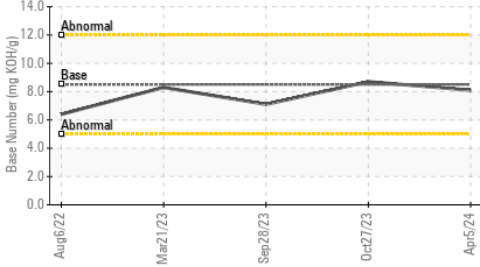


Non-ferrous Metals

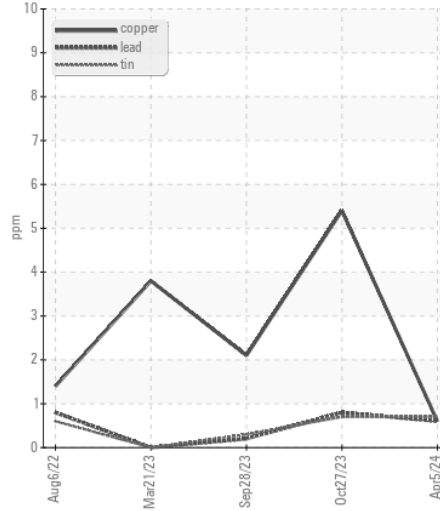


Viscosity @ 100°C

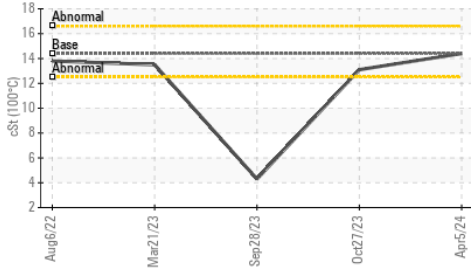

Viscosity @ 100°C

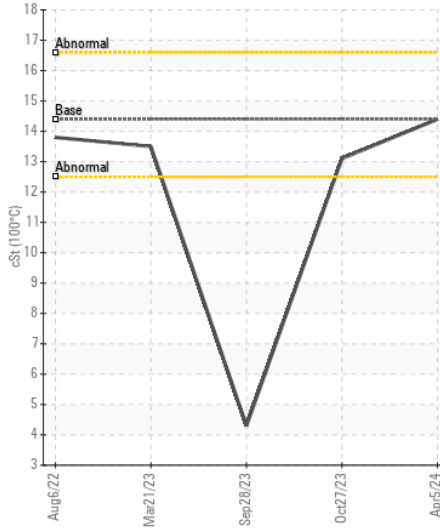

Base Number

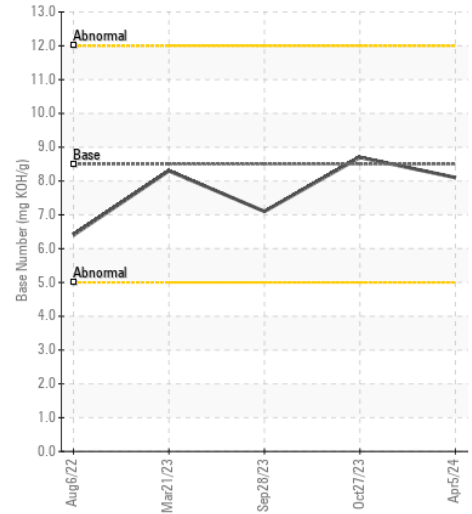

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0873150 **Received** : 11 Apr 2024
Lab Number : 06146347 **Tested** : 12 Apr 2024
Unique Number : 10976425 **Diagnosed** : 12 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BUCKNER HEAVY LIFT

4732 NC 54 EAST
 GRAHAM, NC
 US 27253-9215

Contact: MICHAEL LAWSON
 michael@bucknercompanies.com

T: (336)376-8888

F: (336)376-4090