



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**A-391**  
 Component  
**Diesel Engine**  
 Fluid  
**DURAMAX 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0020451</b>	DC0024232	DC0025558
Sample Date		Client Info		<b>14 Feb 2024</b>	02 Nov 2023	19 Jul 2023
Machine Age	hrs	Client Info		<b>14921</b>	14381	13758
Oil Age	hrs	Client Info		<b>540</b>	623	684
Filter Age	hrs	Client Info		<b>540</b>	623	684
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>16</b>	19	15
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	3	2
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	1
Copper	ppm	ASTM D5185m	>330	<b>6</b>	9	53
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>9</b>	10	10
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	4
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	7.8	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.3</b>	18.6	18.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>25</b>	3	3
Boron	ppm	ASTM D5185m		<b>2</b>	2	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>6</b>	3	4
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>56</b>	65	54
Calcium	ppm	ASTM D5185m		<b>2326</b>	2343	2559
Phosphorus	ppm	ASTM D5185m		<b>921</b>	882	938
Zinc	ppm	ASTM D5185m		<b>1066</b>	1055	1212
Sulfur	ppm	ASTM D5185m		<b>4221</b>	4390	4582
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>10.2</b>	11.0	10.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.8</b>	8.27	6.7
Visc @ 100°C	cSt	ASTM D445		<b>13.9</b>	14.0	13.6

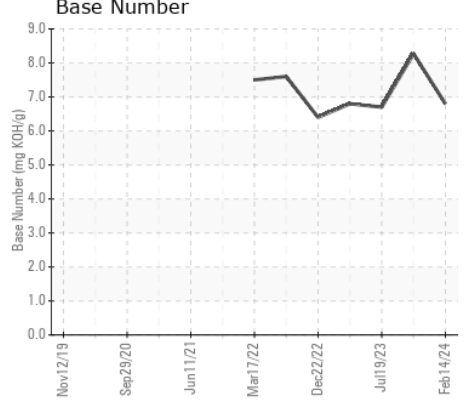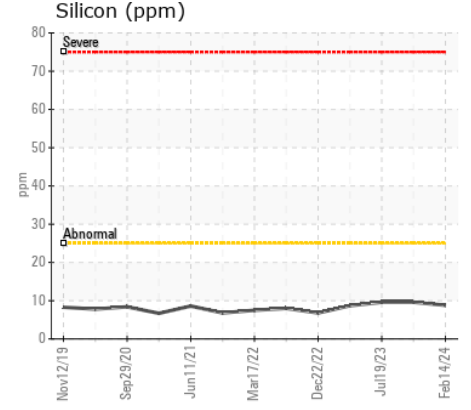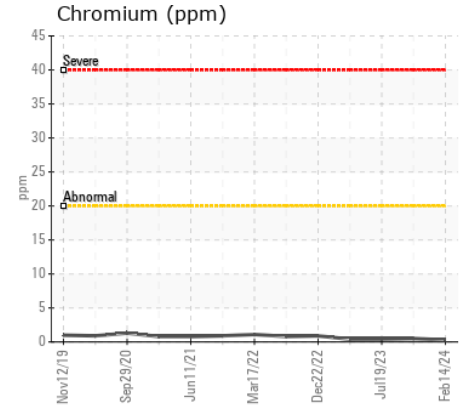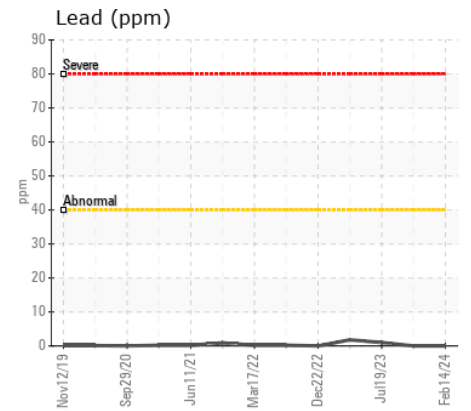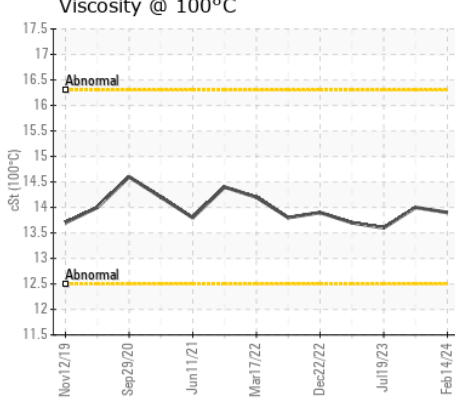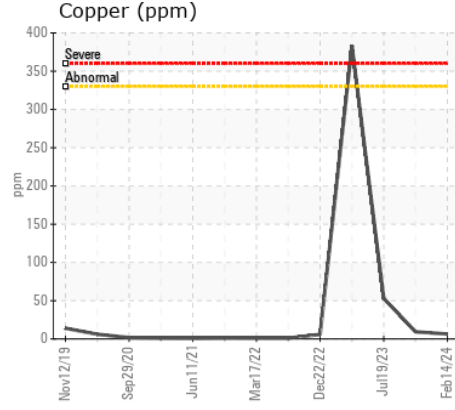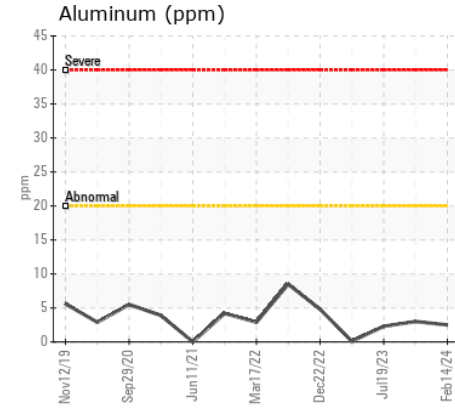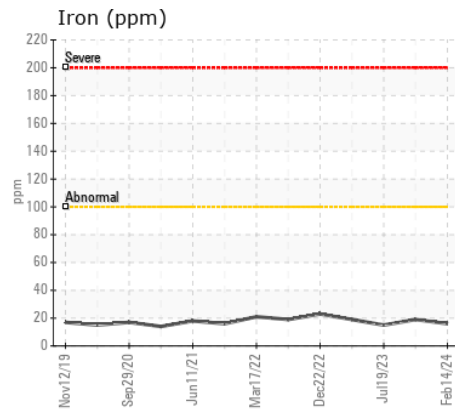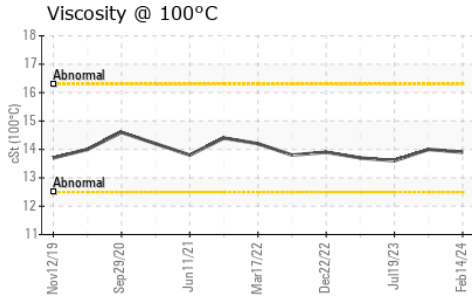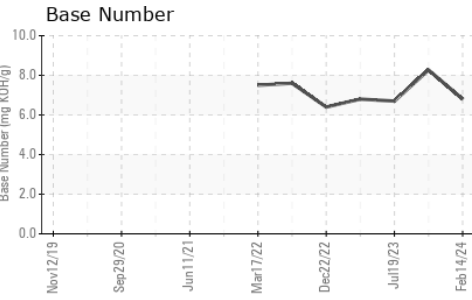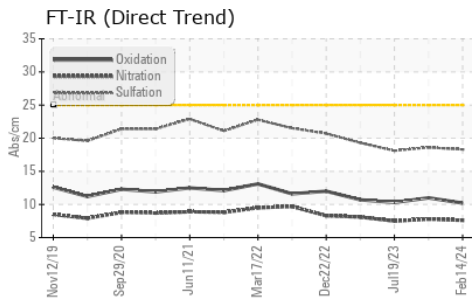

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0020451 **Received** : 11 Apr 2024  
**Lab Number** : 06146463 **Tested** : 12 Apr 2024  
**Unique Number** : 10976541 **Diagnosed** : 12 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**THOMAS BENNETT & HUNTER INC**  
 70 JOHN ST  
 WESTMINSTER, MD  
 US 21157  
 Contact: JOE STEPHAN  
 jstephan@tbhconcrete.com  
 T: (410)848-9030  
 F: (410)848-9032

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)