



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
MARTHA DENTON
Machine Id
[MARTHA DENTON] 004 565395-4
Component
Port Reduction Gear
Fluid
CHEVRON MEROPA 320 (135 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0067808	MW0067814	MW0053532
Sample Date		Client Info		01 Apr 2024	01 Mar 2024	03 Feb 2024
Machine Age	hrs	Client Info		74845	24113	73477
Oil Age	hrs	Client Info		24000	0	135
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Filter Changed		Client Info		None	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	54	58	52
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	2	<1	<1
Titanium	ppm	ASTM D5185m		1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	8	7	6
Lead	ppm	ASTM D5185m	>100	13	12	10
Copper	ppm	ASTM D5185m	>50	7	6	5
Tin	ppm	ASTM D5185m	>10	1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<1	1	<1
Potassium	ppm	ASTM D5185m	>20	3	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		7	6	6
Boron	ppm	ASTM D5185m	20	7	8	7
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m	0	9	8	6
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		2	3	0
Calcium	ppm	ASTM D5185m	25	31	31	28
Phosphorus	ppm	ASTM D5185m	235	313	323	294
Zinc	ppm	ASTM D5185m		14	13	9
Sulfur	ppm	ASTM D5185m		5710	5650	5460
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	0.69	0.64	0.63
Visc @ 40°C	cSt	ASTM D445	304	324	324	324

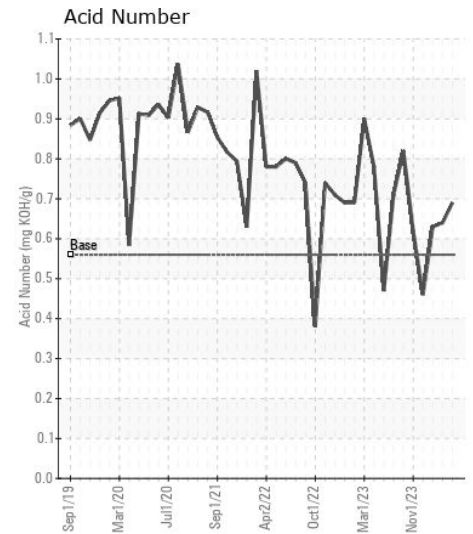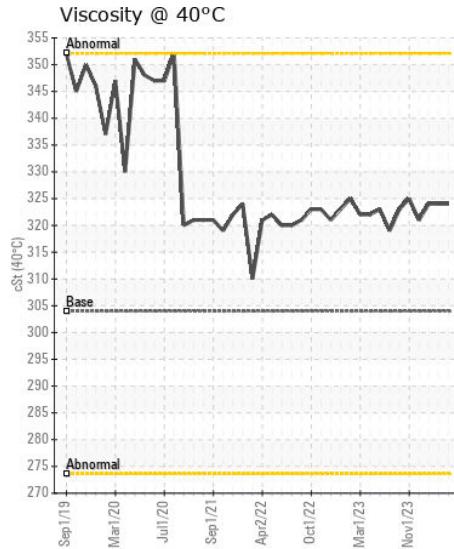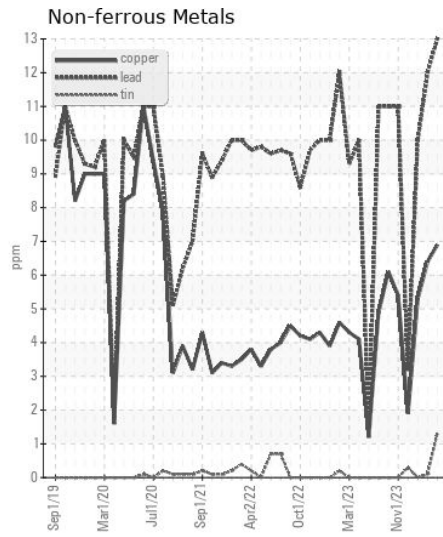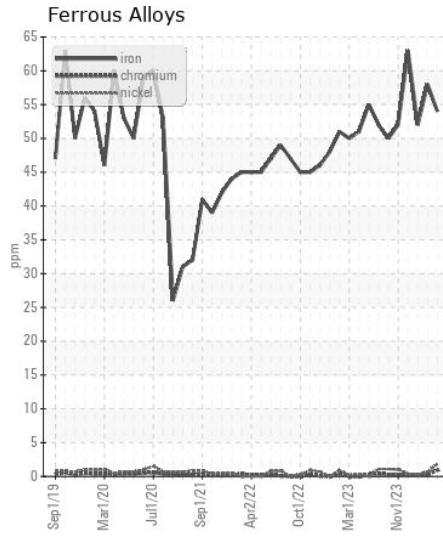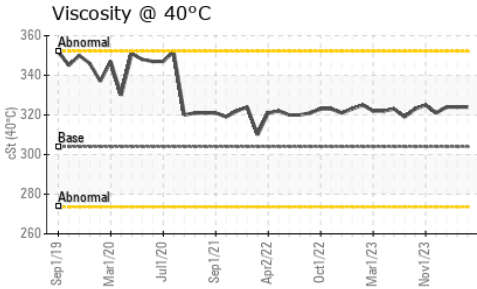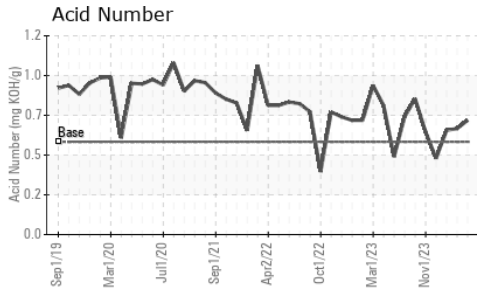

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0067808
Lab Number : 06146682
Unique Number : 10976760
Test Package : MAR 2

Received : 11 Apr 2024
Tested : 12 Apr 2024
Diagnosed : 12 Apr 2024 - Wes Davis

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: ANTHONY VAN CURA
 anthony.vancura@ingrambarga.com
 T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)