



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**DENNIS T DELANEY**  
Machine Id  
[DENNIS T DELANEY] 001 536790-1  
Component  
**Port Main Engine**  
Fluid  
**CHEVRON DELO 710 LS (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0067897</b>	MW0061595	MW0061783
Sample Date		Client Info		<b>01 Apr 2024</b>	01 Feb 2024	02 Dec 2023
Machine Age	hrs	Client Info		<b>74521</b>	73130	72627
Oil Age	hrs	Client Info		<b>74521</b>	73130	72627
Filter Age	hrs	Client Info		<b>298</b>	472	229
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>8</b>	7	6
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>18	<b>3</b>	3	2
Copper	ppm	ASTM D5185m	>80	<b>8</b>	8	8
Tin	ppm	ASTM D5185m	>14	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>5</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	2
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.5	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.7</b>	7.0	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>15.1</b>	15.4	15.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>18</b>	18	7
Boron	ppm	ASTM D5185m		<b>49</b>	42	41
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>49</b>	43	44
Manganese	ppm	ASTM D5185m		<b>2</b>	1	1
Magnesium	ppm	ASTM D5185m		<b>8</b>	12	13
Calcium	ppm	ASTM D5185m		<b>3372</b>	3214	3424
Phosphorus	ppm	ASTM D5185m		<b>6</b>	2	4
Zinc	ppm	ASTM D5185m		<b>1</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>2104</b>	2145	2360
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>7.1</b>	7.3	7.4
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>9.79</b>	9.67	9.80
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.6</b>	14.4	14.7


**FT-IR (Direct Trend)**

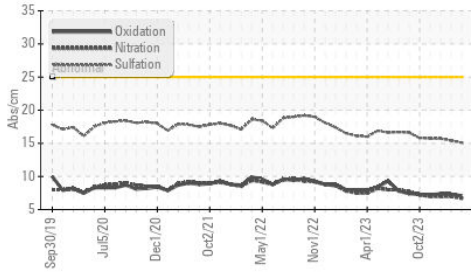


**Base Number**

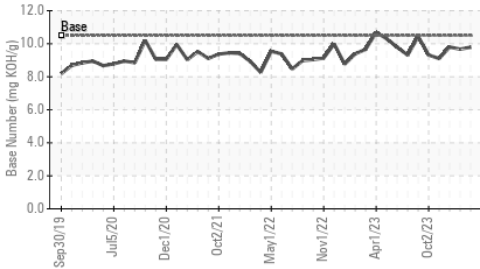


**Viscosity @ 100°C**

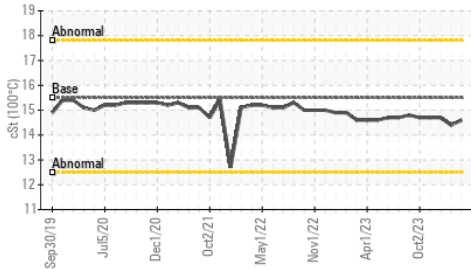


**Ferrous Alloys**

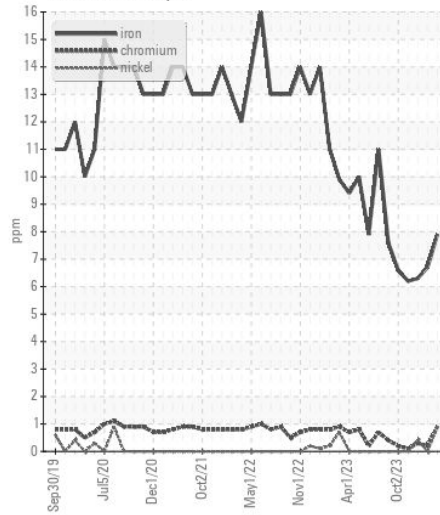


**Non-ferrous Metals**

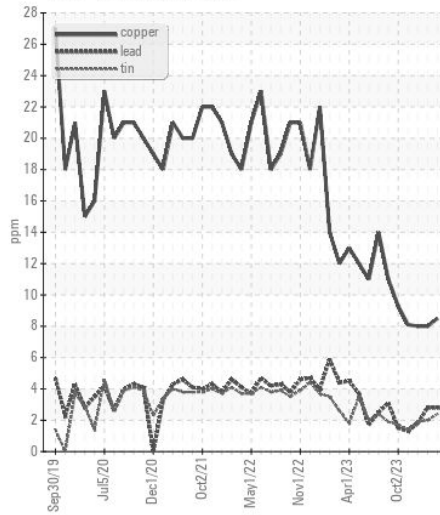

**Viscosity @ 100°C**

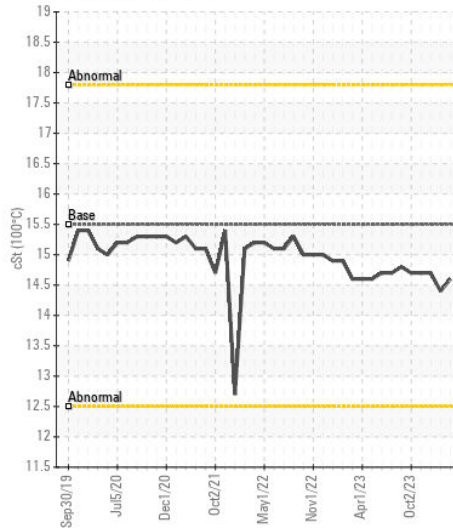

**Base Number**

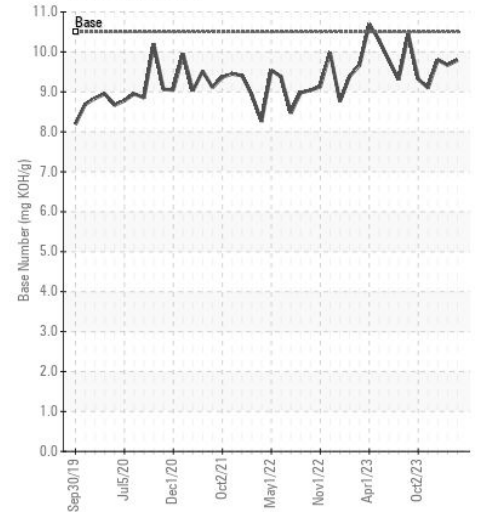

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0067897

**Lab Number** : 06146706

**Unique Number** : 10976784

**Test Package** : MAR 2

**Received** : 11 Apr 2024

**Tested** : 15 Apr 2024

**Diagnosed** : 15 Apr 2024 - Sean Felton

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: JEFF BISHOP

jeff.bishop@ingrambargo.com

T:

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)