



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH 008
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RW0004729	RW0004788	RW0004422
Sample Date		Client Info		24 Feb 2024	30 Sep 2023	12 Aug 2023
Machine Age	hrs	Client Info		2671	2391	2150
Oil Age	hrs	Client Info		280	241	304
Filter Age	hrs	Client Info		280	241	304
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	15	6	10
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	2	8	3
Lead	ppm	ASTM D5185m	>40	1	<1	0
Copper	ppm	ASTM D5185m	>330	2	<1	0
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	4	4
Potassium	ppm	ASTM D5185m	>20	<1	9	8
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.3	0.4	0.5
Nitration	Abs/cm	*ASTM D7624	>20	6.4	6.2	6.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	18.1	18.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<1	2	2
Boron	ppm	ASTM D5185m	250	4	6	8
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	67	63	69
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	1065	864	1025
Calcium	ppm	ASTM D5185m	3000	1426	1062	1293
Phosphorus	ppm	ASTM D5185m	1150	1243	959	1127
Zinc	ppm	ASTM D5185m	1350	1569	1151	1434
Sulfur	ppm	ASTM D5185m	4250	4516	3015	4044
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.8	12.9	13.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	11.70	10.04	10.39
Visc @ 100°C	cSt	ASTM D445	14.4	13.4	13.1	12.9

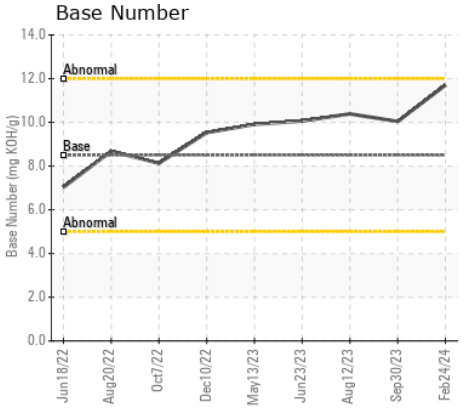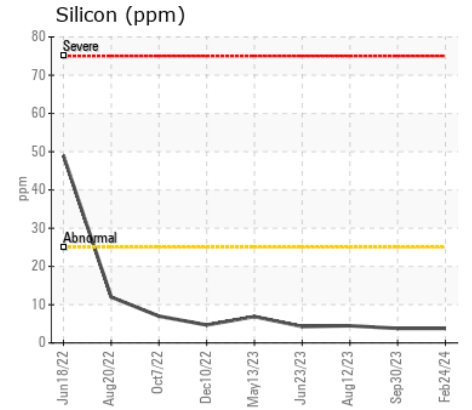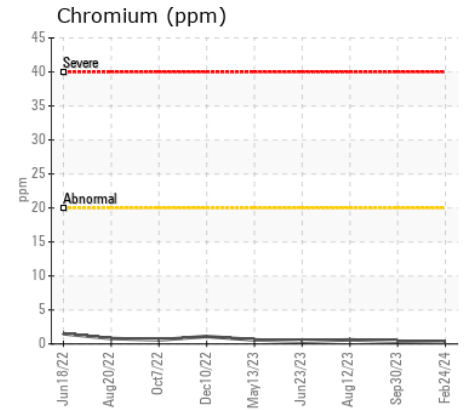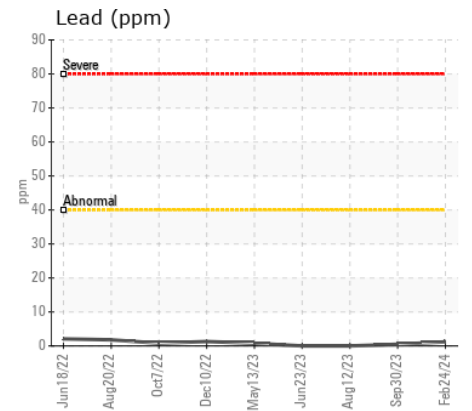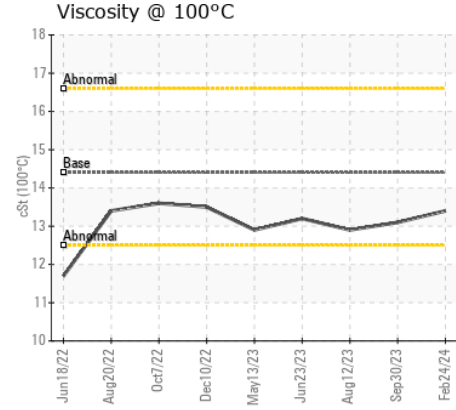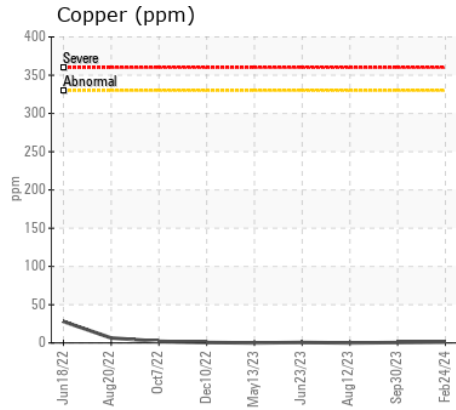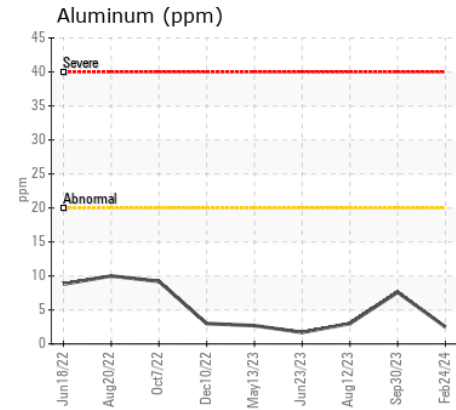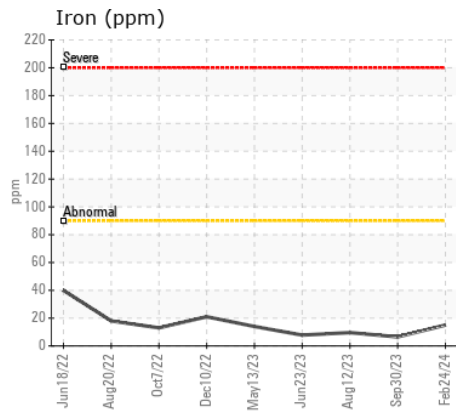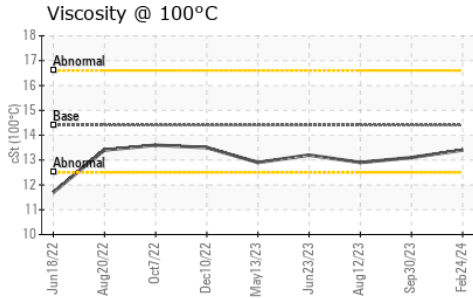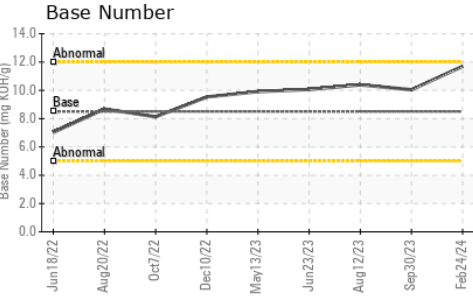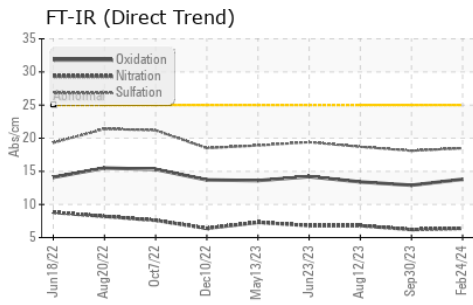

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RW0004729
Lab Number : 06146733
Unique Number : 10976811
Test Package : MOB 2

Received : 11 Apr 2024
Tested : 15 Apr 2024
Diagnosed : 15 Apr 2024 - Wes Davis

HALLACK CONTRACTING, INC.
 4223 W POLK
 HART, MI
 US 49420

Contact: DAN HALLACK KARL BUTCHER
 shop@hallackcontracting.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (231)873-5081
 F: (231)873-2889