



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**JAMES L HAMILTON**  
Machine Id  
[**JAMES L HAMILTON**] 003 572403-3  
Component  
**Starboard Main Engine**  
Fluid  
**CHEVRON DELO 710 LS (220 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW06146769</b>	MW0064628	MW0064654
Sample Date		Client Info		<b>01 Apr 2024</b>	01 Mar 2024	04 Feb 2024
Machine Age	hrs	Client Info		<b>61664</b>	60951	60362
Oil Age	hrs	Client Info		<b>61664</b>	0	60362
Filter Age	hrs	Client Info		<b>0</b>	0	346
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>18</b>	20	16
Chromium	ppm	ASTM D5185m	>8	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>&lt;1</b>	1	1
Lead	ppm	ASTM D5185m	>18	<b>2</b>	4	3
Copper	ppm	ASTM D5185m	>80	<b>19</b>	22	17
Tin	ppm	ASTM D5185m	>14	<b>2</b>	4	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>4</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	1
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1</b>	1	1
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.8</b>	7.9	7.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>16.6</b>	16.6	16.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>31</b>	33	25
Boron	ppm	ASTM D5185m		<b>44</b>	42	34
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>48</b>	47	37
Manganese	ppm	ASTM D5185m		<b>0</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>12</b>	12	9
Calcium	ppm	ASTM D5185m		<b>3752</b>	3281	2606
Phosphorus	ppm	ASTM D5185m		<b>6</b>	3	3
Zinc	ppm	ASTM D5185m		<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>3048</b>	2608	2074
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>7.6</b>	7.9	7.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>9.17</b>	9.43	9.72
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.2</b>	14.7	14.7


FT-IR (Direct Trend)

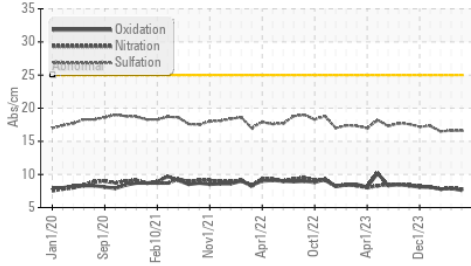


Base Number

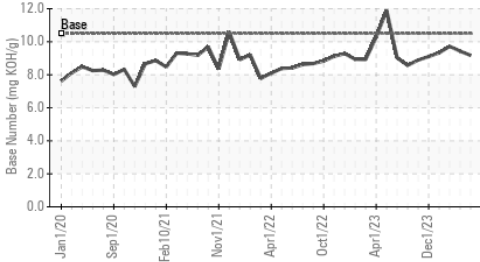


Viscosity @ 100°C

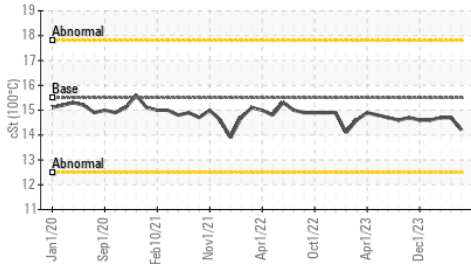


Ferrous Alloys

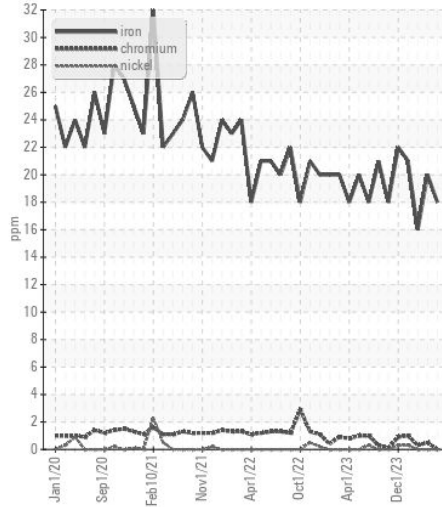


Non-ferrous Metals

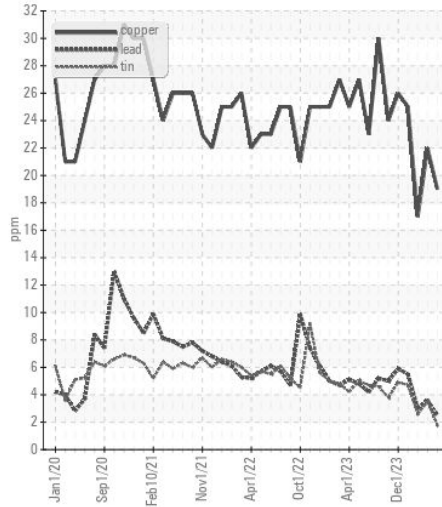

Viscosity @ 100°C

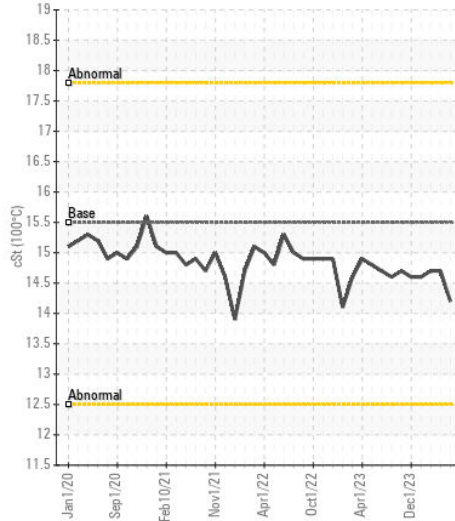

Base Number

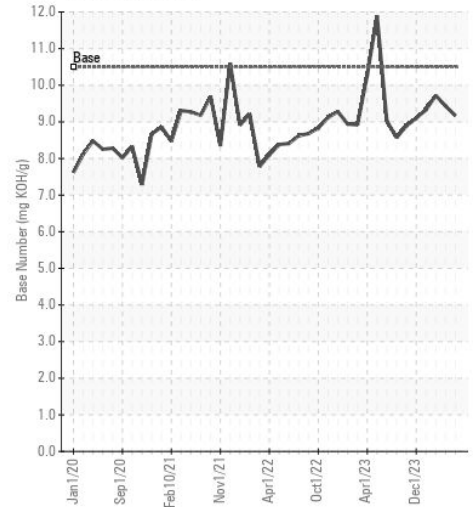

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW06146769  
**Lab Number** : 06146769  
**Unique Number** : 10976847  
**Test Package** : MAR 2  
**Received** : 11 Apr 2024  
**Tested** : 12 Apr 2024  
**Diagnosed** : 15 Apr 2024 - Sean Felton

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: ANTHONY VAN CURA  
 anthony.vancura@ingrambarge.com  
 T: (270)415-4467  
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)