

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50M 141510
Component
Front Right Wheel Hub
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DJJ0021894	---	---
Sample Date		Client Info		05 Apr 2024	---	---
Machine Age	hrs	Client Info		3823	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>325	133	---	---
Chromium	ppm	ASTM D5185m	>3	0	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m	>4	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>3	0	---	---
Copper	ppm	ASTM D5185m	>70	6	---	---
Tin	ppm	ASTM D5185m	>2	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>70	8	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	2	---	---
Boron	ppm	ASTM D5185m	400	0	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	12	0	---	---
Calcium	ppm	ASTM D5185m	150	28	---	---
Phosphorus	ppm	ASTM D5185m	1650	380	---	---
Zinc	ppm	ASTM D5185m	125	17	---	---
Sulfur	ppm	ASTM D5185m	22500	20230	---	---
Visc @ 40°C	cSt	ASTM D445	143	120	---	---

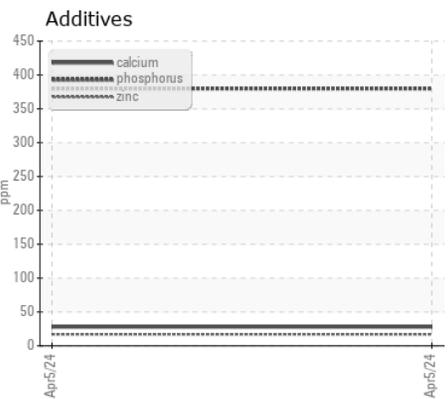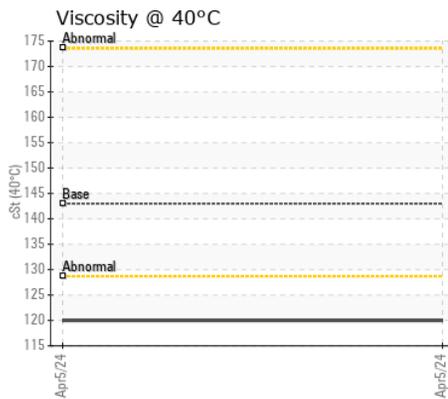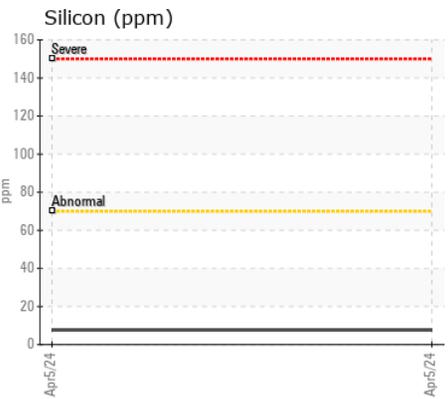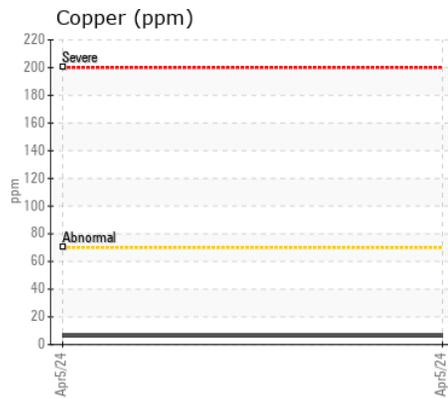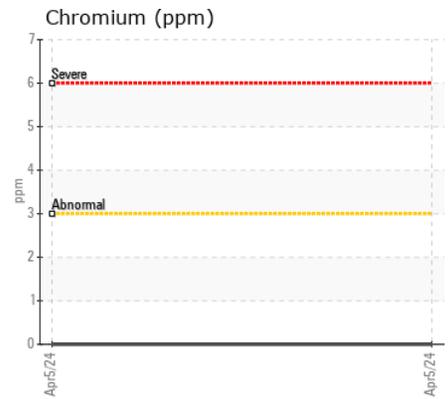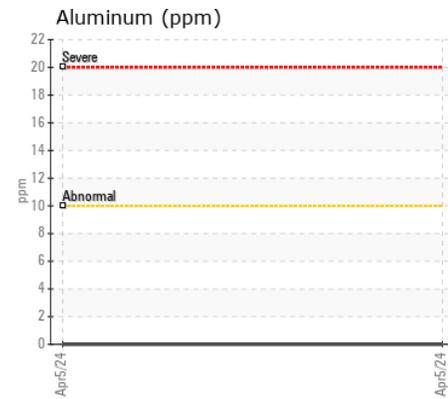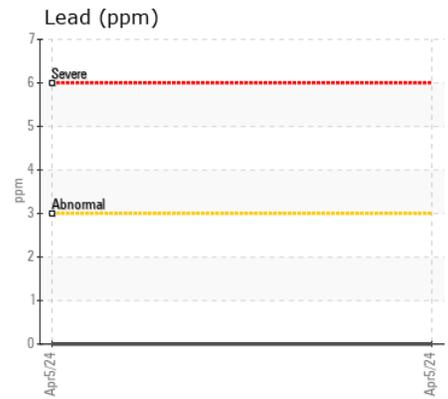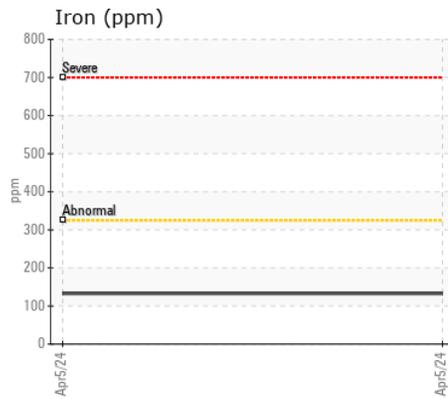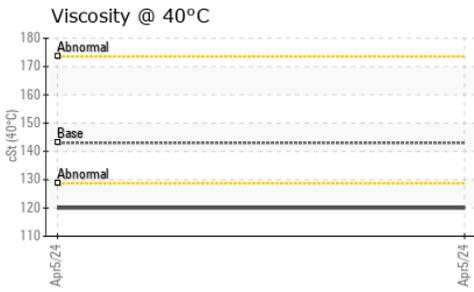

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : DJJ0021894

Lab Number : 06146803

Unique Number : 10976881

Test Package : MOBCE

Received : 11 Apr 2024

Tested : 12 Apr 2024

Diagnosed : 12 Apr 2024 - Wes Davis

RECO EQUIPMENT INC

8075 PRODUCTION DRIVE

FLORENCE, KY

US 41042

Contact: TRACEY EDGERTON

tedgerton@recoequip.com

T:

F: (859)727-7974

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)