



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
VOLVO A40G 353284
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (13 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0001192	VCP413784	---
Sample Date		Client Info		08 Apr 2024	14 Sep 2023	---
Machine Age	hrs	Client Info		1102	592	---
Oil Age	hrs	Client Info		1102	0	---
Filter Age	hrs	Client Info		1102	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	18	19	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	8	2	---
Titanium	ppm	ASTM D5185m		2	0	---
Silver	ppm	ASTM D5185m	>2	<1	0	---
Aluminum	ppm	ASTM D5185m	>30	3	3	---
Lead	ppm	ASTM D5185m	>40	1	<1	---
Copper	ppm	ASTM D5185m	>20	▲ 246	380	---
Tin	ppm	ASTM D5185m	>20	2	3	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	11	26	---
Potassium	ppm	ASTM D5185m	>20	2	4	---
Fuel	%	ASTM D3524	>3.0	<1.0	0.4	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol	%	*ASTM D2982		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	8.1	8.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.9	19.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		0	3	---
Boron	ppm	ASTM D5185m	2.5	379	68	---
Barium	ppm	ASTM D5185m	0.0	<1	0	---
Molybdenum	ppm	ASTM D5185m	0.7	84	63	---
Manganese	ppm	ASTM D5185m	0.0	2	3	---
Magnesium	ppm	ASTM D5185m	256	364	236	---
Calcium	ppm	ASTM D5185m	2057	1465	1949	---
Phosphorus	ppm	ASTM D5185m	935	1101	1031	---
Zinc	ppm	ASTM D5185m	1223	1174	1266	---
Sulfur	ppm	ASTM D5185m	4079	3399	4021	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.8	14.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	6.0	6.1	---
Visc @ 100°C	cSt	ASTM D445	15.0	● 12.1	▲ 11.1	---

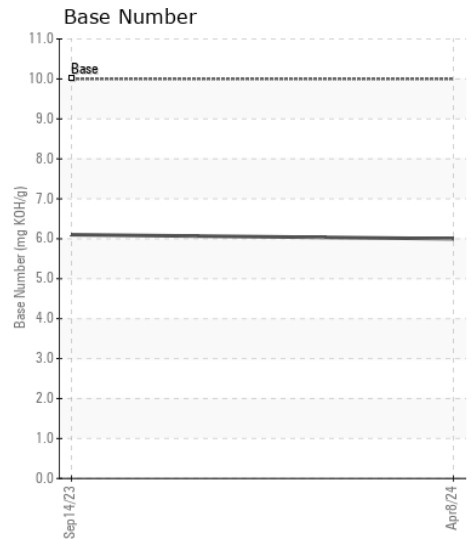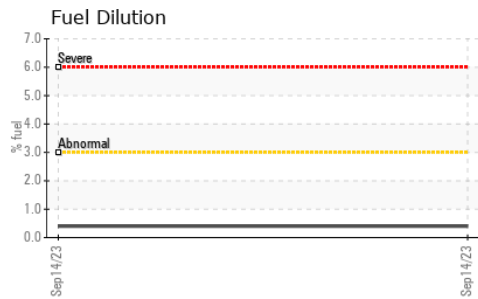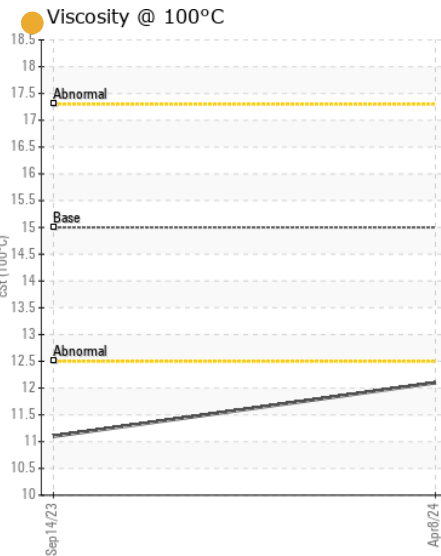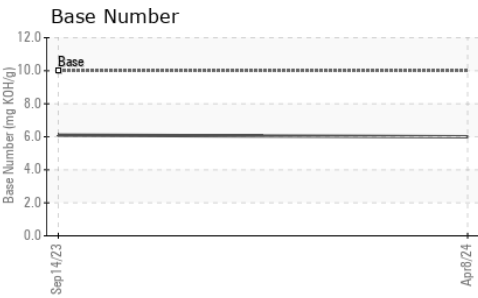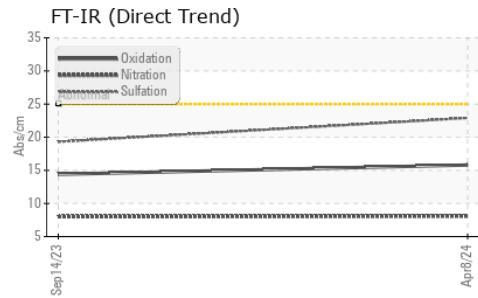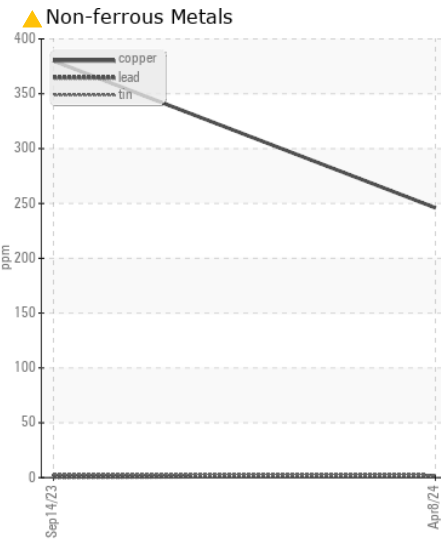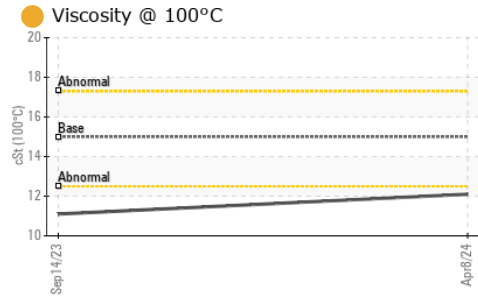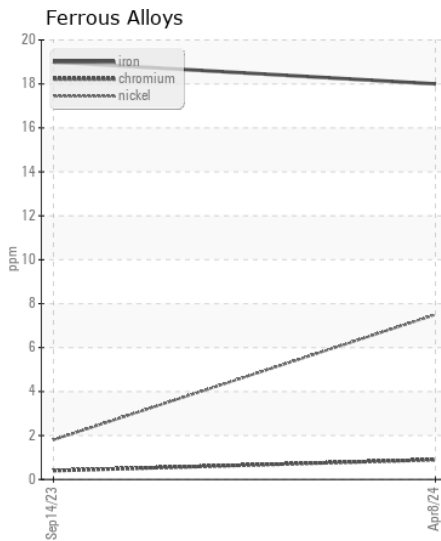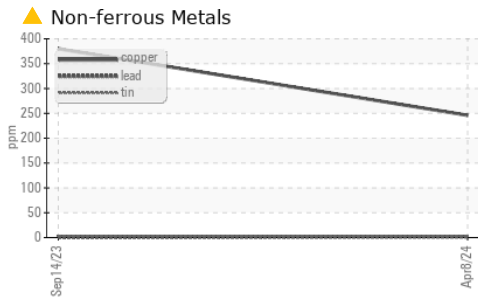

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001192 **Received** : 12 Apr 2024
Lab Number : 06146888 **Tested** : 15 Apr 2024
Unique Number : 10976966 **Diagnosed** : 15 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: FuelDilution, Glycol, TBN)

PLEASANT EXCAVATING COMPANY INC
 24024 FREDERICK ROAD
 CLARKSBURG, MD
 US 20871
 Contact: H TRENT
 HTRENT@PLEASANTS.ORG
 T: (301)252-5635
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)