



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
ALJON 30131
 Component
Diesel Engine
 Fluid
CHEVRON 15W40 (14 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0001245	ML0000032	VCP409475
Sample Date		Client Info		09 Apr 2024	15 Feb 2024	08 Jan 2024
Machine Age	hrs	Client Info		3026	2730	2490
Oil Age	hrs	Client Info		296	240	0
Filter Age	hrs	Client Info		296	240	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	4	2	2
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>4	1	<1	0
Titanium	ppm	ASTM D5185m		1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	3	1
Lead	ppm	ASTM D5185m	>40	1	0	<1
Copper	ppm	ASTM D5185m	>330	1	0	0
Tin	ppm	ASTM D5185m	>15	1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	7	5	4
Potassium	ppm	ASTM D5185m	>20	2	<1	1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.7	6.8	6.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.0	22.0	20.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>50	0	1	<1
Boron	ppm	ASTM D5185m		352	309	379
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		110	104	85
Manganese	ppm	ASTM D5185m		1	<1	0
Magnesium	ppm	ASTM D5185m		549	539	395
Calcium	ppm	ASTM D5185m		1472	1348	1368
Phosphorus	ppm	ASTM D5185m		844	847	990
Zinc	ppm	ASTM D5185m		919	953	1260
Sulfur	ppm	ASTM D5185m		2809	2653	3174
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.8	16.2	15.1
Base Number (BN)	mg KOH/g	ASTM D2896		8.6	8.1	7.2
Visc @ 100°C	cSt	ASTM D445	14.4	12.5	12.3	12.4


FT-IR (Direct Trend)

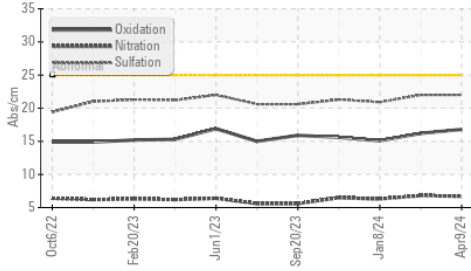


Ferrous Alloys

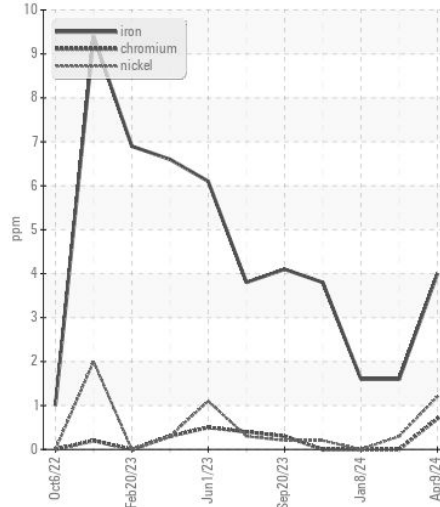


Base Number

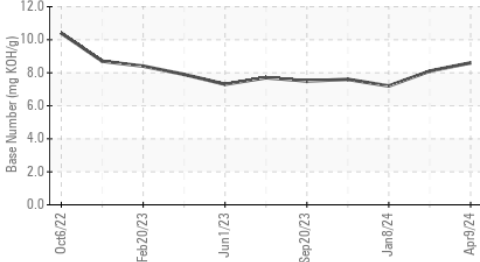


Non-ferrous Metals

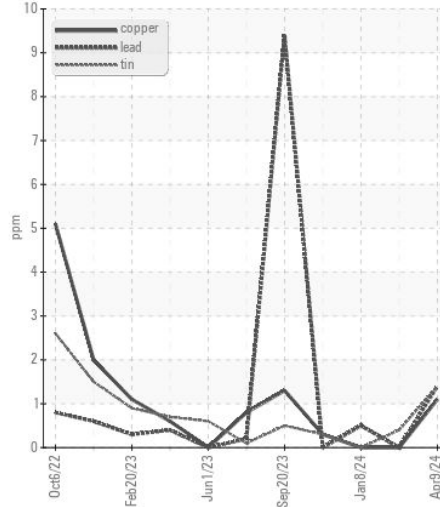


Viscosity @ 100°C

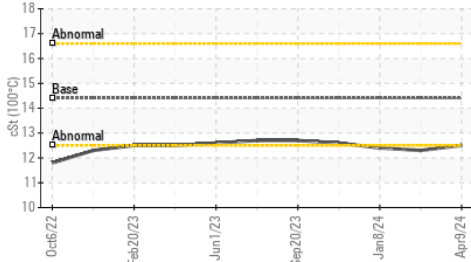

Viscosity @ 100°C

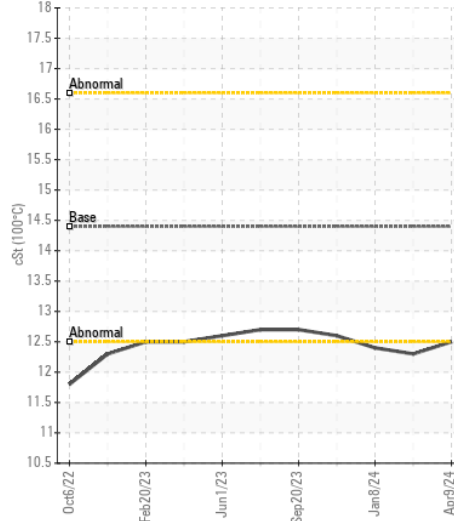

Base Number

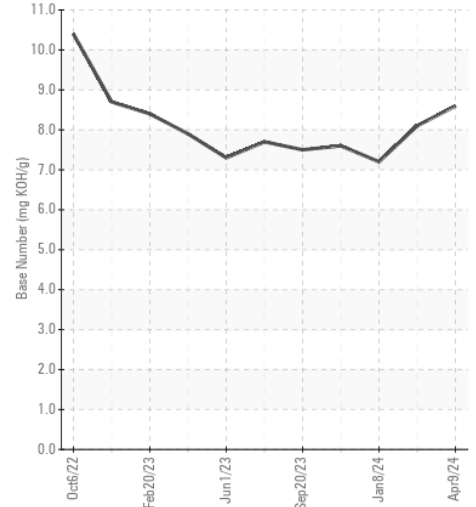

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001245
Lab Number : 06146892
Unique Number : 10976970
Test Package : CONST (Additional Tests: TBN)

PLEASANT EXCAVATING COMPANY INC
 24024 FREDERICK ROAD
 CLARKSBURG, MD
 US 20871
 Contact: H TRENT
 HTRENT@PLEASANTS.ORG
 T: (301)252-5635
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)