



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
DAYTON RAND CO MAINTENANCE
 Component
Natural Gas Engine
 Fluid
SHELL ROTELLA T 15W40 (6 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0887896	WC0410893	WCM1383440
Sample Date		Client Info		11 Apr 2024	20 Mar 2020	13 Mar 2017
Machine Age	hrs	Client Info		119	114	106
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>50	2	1	9
Chromium	ppm	ASTM D5185m	>4	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>9	2	1	2
Lead	ppm	ASTM D5185m	>30	2	<1	0
Copper	ppm	ASTM D5185m	>35	1	<1	6
Tin	ppm	ASTM D5185m	>4	1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	18	17	16
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0	0
Nitration	Abs/cm	*ASTM D7624	>20	7.0	4.7	4.
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.5	17.5	12.
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	3
Boron	ppm	ASTM D5185m	316	88	10	20
Barium	ppm	ASTM D5185m	0.0	<1	0	<1
Molybdenum	ppm	ASTM D5185m	1.2	86	52	65
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	24	32	804	980
Calcium	ppm	ASTM D5185m	2292	2053	956	1344
Phosphorus	ppm	ASTM D5185m	1064	1022	903	1058
Zinc	ppm	ASTM D5185m	1160	1066	1009	1235
Sulfur	ppm	ASTM D5185m	4996	3766	3423	1308
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.6	12.9	8.
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	7.2	---	---
Visc @ 100°C	cSt	ASTM D445	15.7	14.3	14.3	14.04

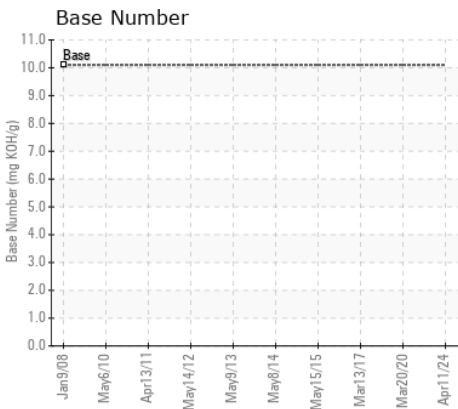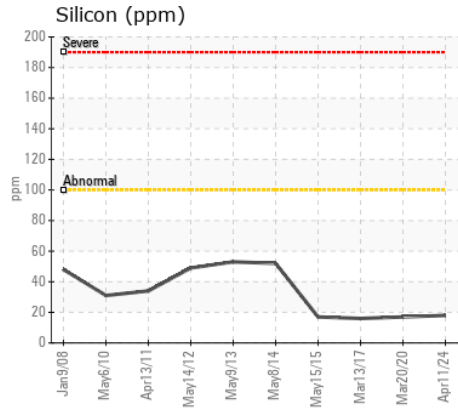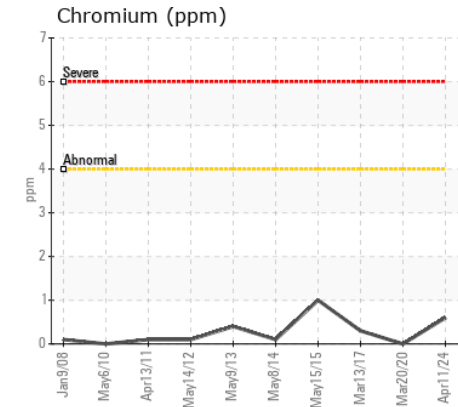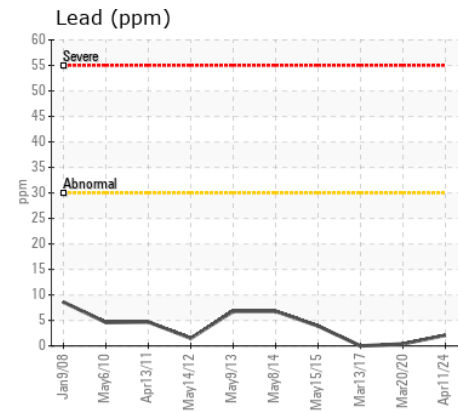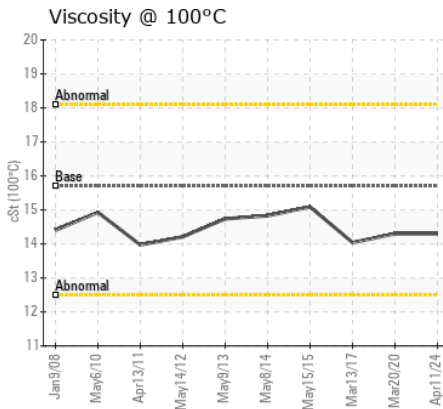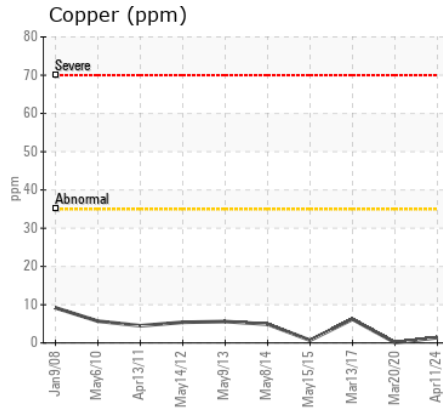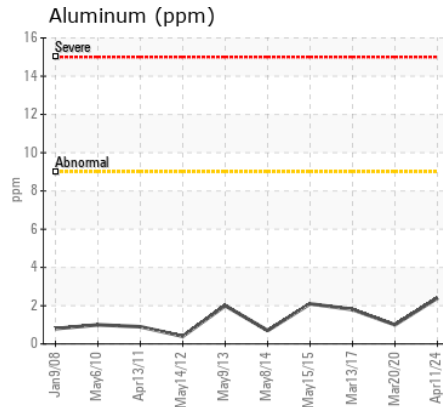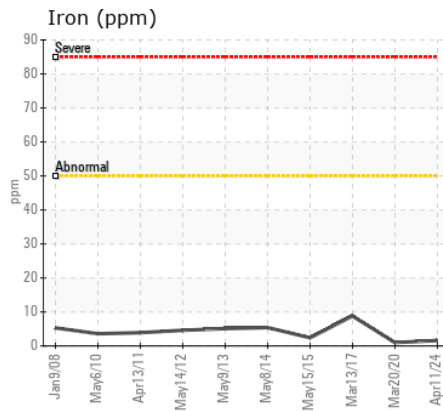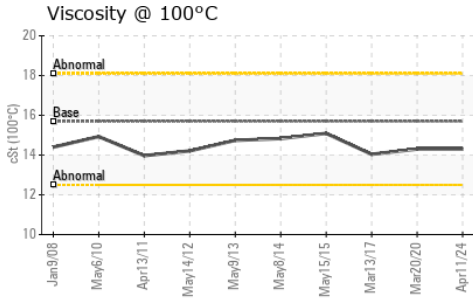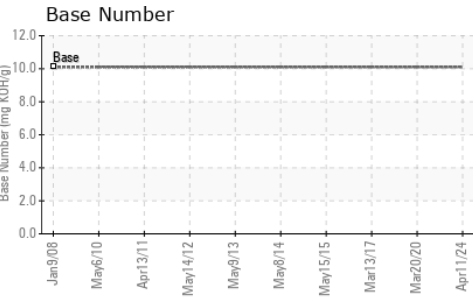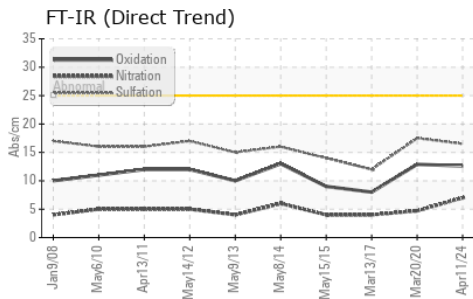

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0887896 **Received** : 12 Apr 2024
Lab Number : 06146932 **Tested** : 15 Apr 2024
Unique Number : 10977010 **Diagnosed** : 15 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

PIEDMONT GENERATOR
 7560 NC HWY 22 NORTH
 CLIMAX, NC
 US 27233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: TERRY SHEPPARD
 terry1pg@bellsouth.net; bill3pg@bellsouth.net
 T: (336)685-4859
 F: (336)685-5297