



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR A944C CAR SIDE 4 - LIEBHERR (S/N 027895-744)**  
Component  
**Diesel Engine**  
Fluid  
**UNITED OIL DURALENE (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0035330</b>	DC0033381	DC0029670
Sample Date		Client Info		<b>21 Mar 2024</b>	20 Dec 2023	22 Oct 2023
Machine Age	hrs	Client Info		<b>250</b>	250	250
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>9</b>	10	6
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	5	1
Copper	ppm	ASTM D5185m	>125	<b>2</b>	2	1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>60	<b>6</b>	6	7
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	3
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	9.9	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.1</b>	22.4	20.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	0
Boron	ppm	ASTM D5185m		<b>6</b>	6	4
Barium	ppm	ASTM D5185m		<b>0</b>	0	4
Molybdenum	ppm	ASTM D5185m		<b>6</b>	6	3
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>92</b>	89	44
Calcium	ppm	ASTM D5185m		<b>2533</b>	2560	2548
Phosphorus	ppm	ASTM D5185m		<b>1011</b>	1016	990
Zinc	ppm	ASTM D5185m		<b>1191</b>	1252	1139
Sulfur	ppm	ASTM D5185m		<b>4497</b>	3844	4318
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.3</b>	18.7	14.4
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.3</b>	4.8	6.8
Visc @ 100°C	cSt	ASTM D445		<b>13.8</b>	13.7	13.6

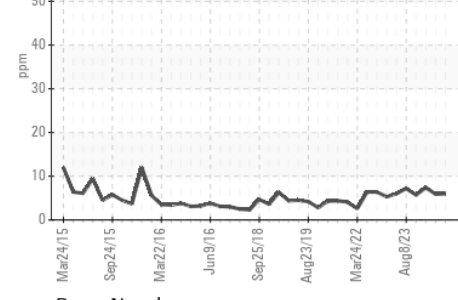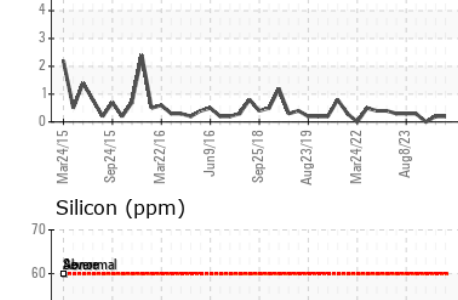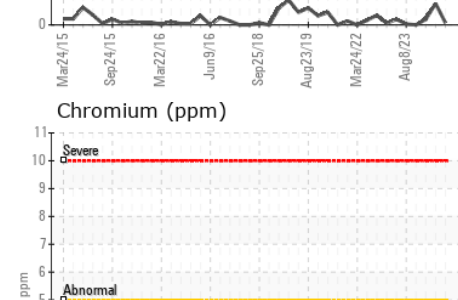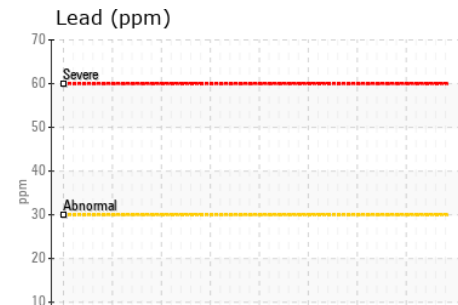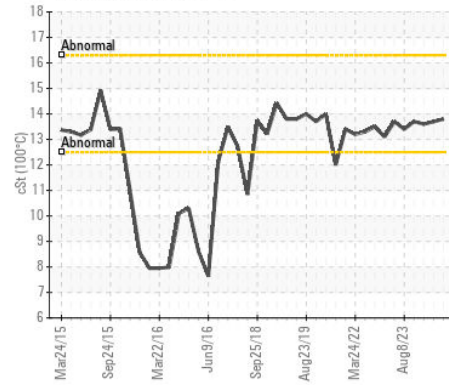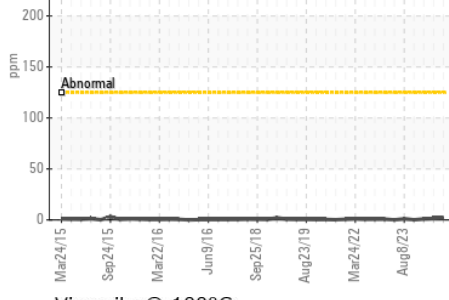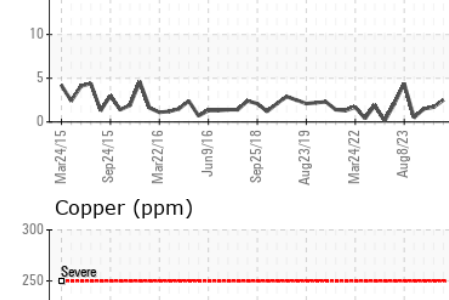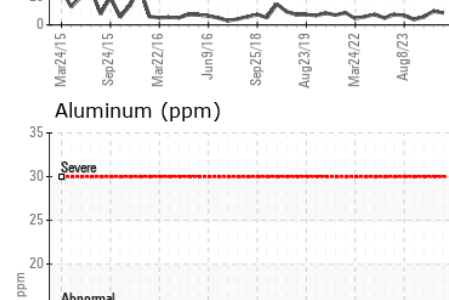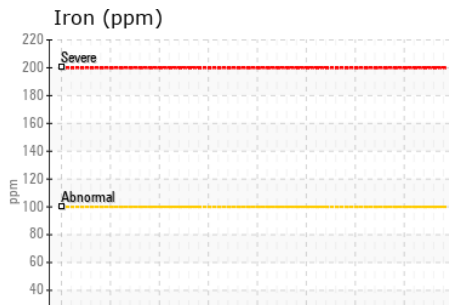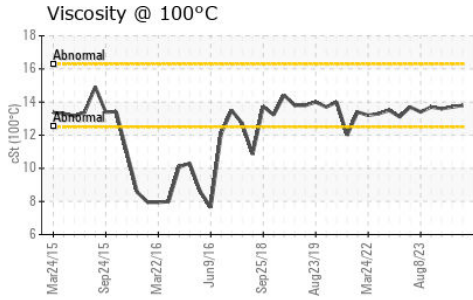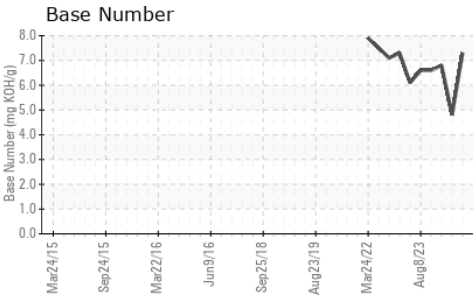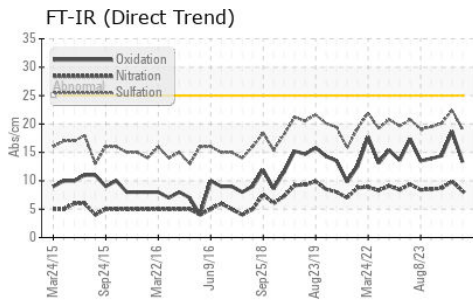

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0035330  
**Lab Number** : 06147050  
**Unique Number** : 10977128  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Received** : 12 Apr 2024  
**Tested** : 15 Apr 2024  
**Diagnosed** : 15 Apr 2024 - Sean Felton

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**SIMS ARG**  
 3100 WEEDON STREET  
 BALTIMORE, MD  
 US 21226  
 Contact: MARK NUZZO  
 mark.nuzzo@simsmm.com  
 T: (410)355-1488  
 F: (410)355-5423