



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
829098 PETERBILT 320
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0102224	GFL0061438	---
Sample Date		Client Info		10 Apr 2024	14 Nov 2023	---
Machine Age	hrs	Client Info		18121	0	---
Oil Age	hrs	Client Info		0	600	---
Filter Age	hrs	Client Info		0	600	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	16	19	---
Chromium	ppm	ASTM D5185m	>4	1	<1	---
Nickel	ppm	ASTM D5185m	>2	0	2	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	3	2	---
Lead	ppm	ASTM D5185m	>45	<1	2	---
Copper	ppm	ASTM D5185m	>85	2	9	---
Tin	ppm	ASTM D5185m	>4	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	15	25	---
Potassium	ppm	ASTM D5185m	>20	2	4	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	6.5	8.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	21.9	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	1	---
Boron	ppm	ASTM D5185m	0	16	91	---
Barium	ppm	ASTM D5185m	0	0	<1	---
Molybdenum	ppm	ASTM D5185m	60	56	73	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	1010	868	833	---
Calcium	ppm	ASTM D5185m	1070	1113	1158	---
Phosphorus	ppm	ASTM D5185m	1150	1065	908	---
Zinc	ppm	ASTM D5185m	1270	1235	1122	---
Sulfur	ppm	ASTM D5185m	2060	3864	2985	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.2	17.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.1	8.6	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	12.5	---

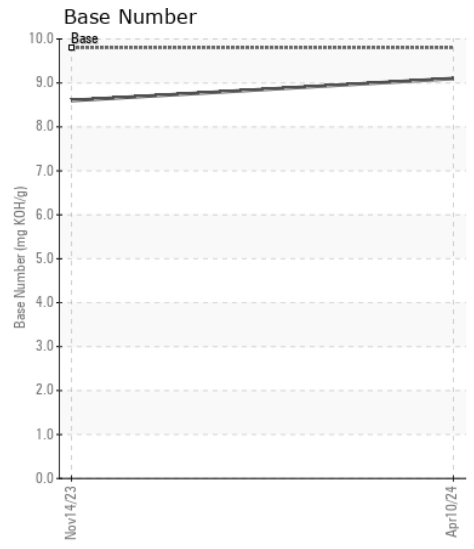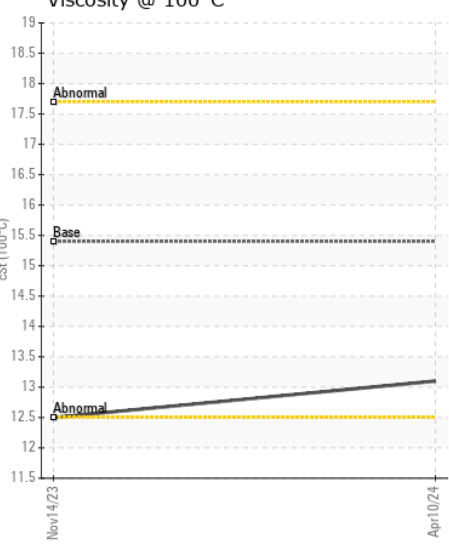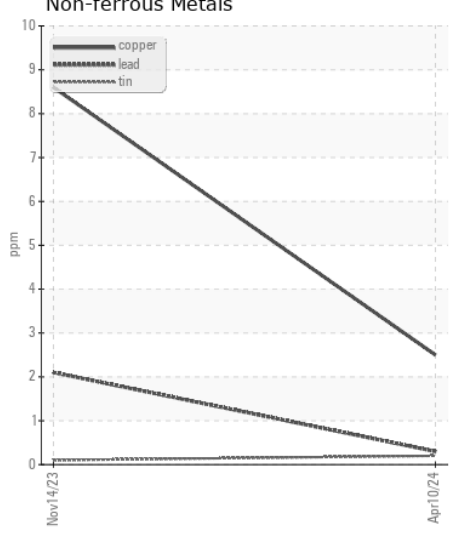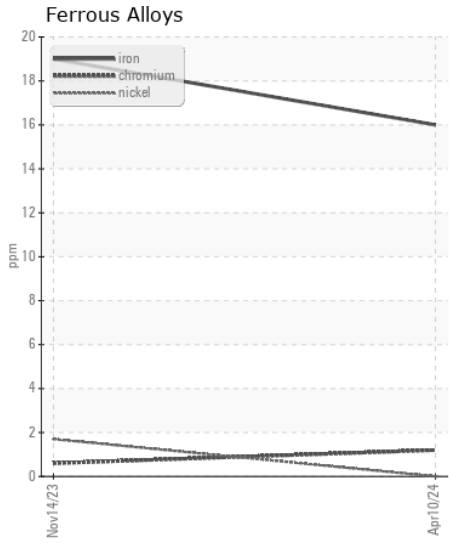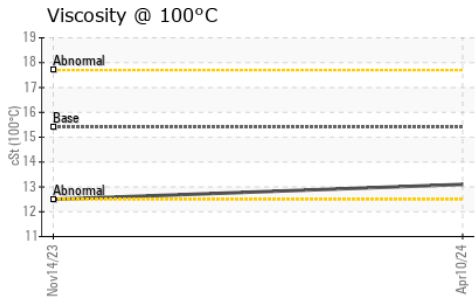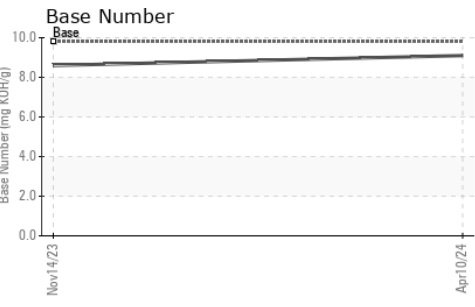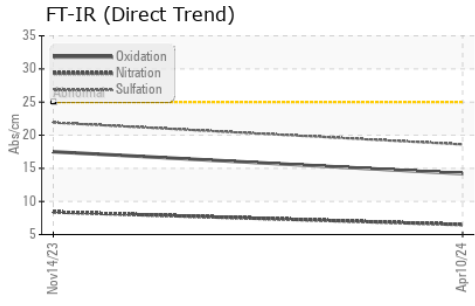

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0102224
Lab Number : 06147145
Unique Number : 10977223
Test Package : FLEET

GFL Environmental - 642- Grand Rapids Hauling
 5826 Alden Nash Ave SE
 Lowell, MI
 US 49331
 Contact: Josh Arnett
 joshuaarnett@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)