



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[W65761]**  
Machine Id  
**SY036MCA00778**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (7 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: W65761 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0206038</b>	JR0178439	---
Sample Date		Client Info		<b>04 Apr 2024</b>	31 Aug 2023	---
Machine Age	hrs	Client Info		<b>4481</b>	3978	---
Oil Age	hrs	Client Info		<b>503</b>	3978	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>15</b>	18	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	4	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>3</b>	5	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>9</b>	13	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.5</b>	8.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.7</b>	22.6	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>4</b>	3	---
Boron	ppm	ASTM D5185m	250	<b>237</b>	236	---
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m	100	<b>219</b>	105	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	450	<b>785</b>	452	---
Calcium	ppm	ASTM D5185m	3000	<b>1420</b>	1594	---
Phosphorus	ppm	ASTM D5185m	1150	<b>971</b>	1089	---
Zinc	ppm	ASTM D5185m	1350	<b>1162</b>	1397	---
Sulfur	ppm	ASTM D5185m	4250	<b>3568</b>	3649	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.6</b>	17.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.3</b>	5.4	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.3</b>	12.5	---

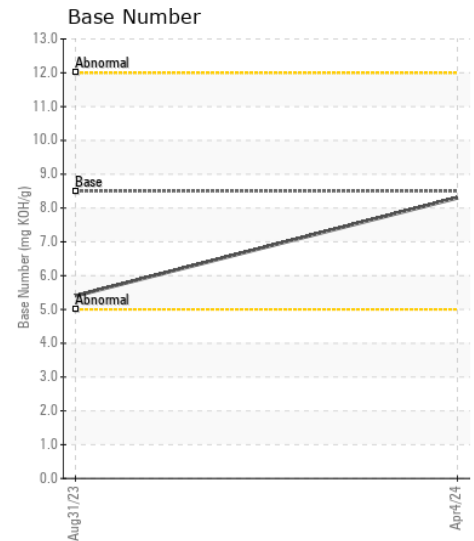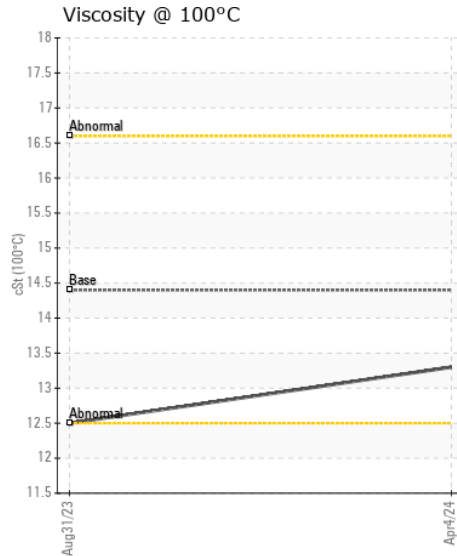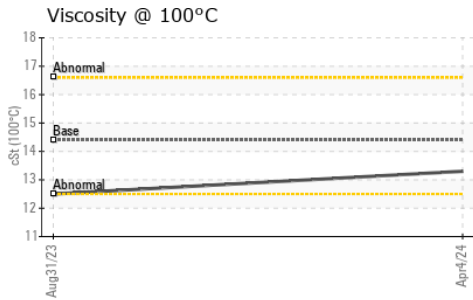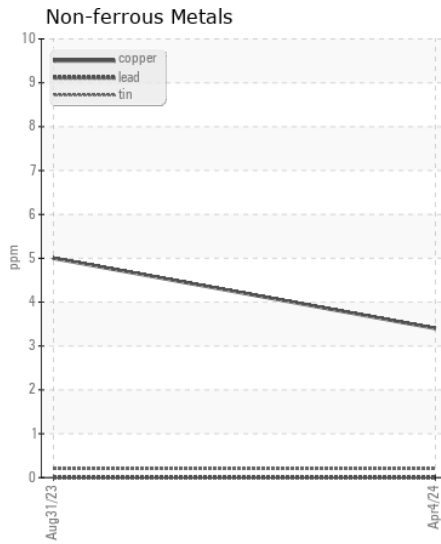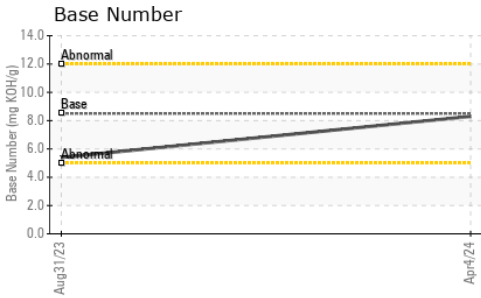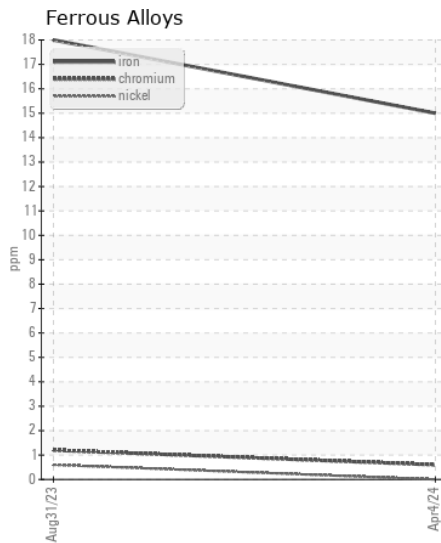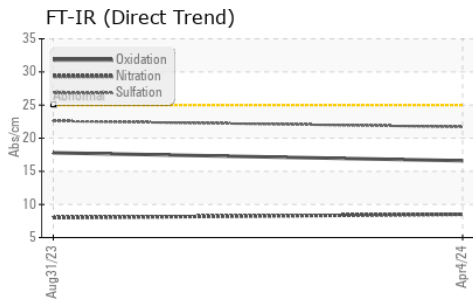

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0206038 **Received** : 12 Apr 2024  
**Lab Number** : 06147191 **Tested** : 15 Apr 2024  
**Unique Number** : 10977269 **Diagnosed** : 16 Apr 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269

Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211

F: (704)596-6198