



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Mobile Fleet**  
Machine Id  
**5100 5100**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (11 GAL)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0919056</b>	WC0861605	WC0852351
Sample Date		Client Info		<b>10 Apr 2024</b>	05 Jan 2024	06 Sep 2023
Machine Age	hrs	Client Info		<b>12734</b>	12204	11569
Oil Age	hrs	Client Info		<b>514</b>	527	609
Filter Age	hrs	Client Info		<b>514</b>	527	609
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	ATTENTION	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>91	<b>23</b>	22	24
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>16	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>41	<b>3</b>	<1	<1
Copper	ppm	ASTM D5185m	>22	<b>4</b>	3	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION











There is a high amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>24	<b>5</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.5	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.3</b>	9.8	10.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.6</b>	25.1	25.3
Particles >4µm		ASTM D7647	>20000	<b>▲ 57687</b>	10622	3637
Particles >6µm		ASTM D7647	>5000	<b>▲ 31426</b>	● 5787	1981
Particles >14µm		ASTM D7647	>640	<b>▲ 5348</b>	● 985	337
Particles >21µm		ASTM D7647	>160	<b>▲ 1802</b>	● 332	114
Particles >38µm		ASTM D7647	>40	<b>▲ 278</b>	● 51	18
Particles >71µm		ASTM D7647	>10	<b>▲ 28</b>	● 5	2
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>▲ 23/22/20</b>	● 21/20/17	19/18/16
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>5</b>	4	5
Boron	ppm	ASTM D5185m	250	<b>59</b>	63	50
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>46</b>	47	46
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	450	<b>544</b>	535	548
Calcium	ppm	ASTM D5185m	3000	<b>1811</b>	1752	1788
Phosphorus	ppm	ASTM D5185m	1150	<b>832</b>	807	778
Zinc	ppm	ASTM D5185m	1350	<b>983</b>	968	942
Sulfur	ppm	ASTM D5185m	4250	<b>3017</b>	2669	2937
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>26.1</b>	25.1	25.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.9</b>	8.7	9.0
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.1</b>	12.8	12.6

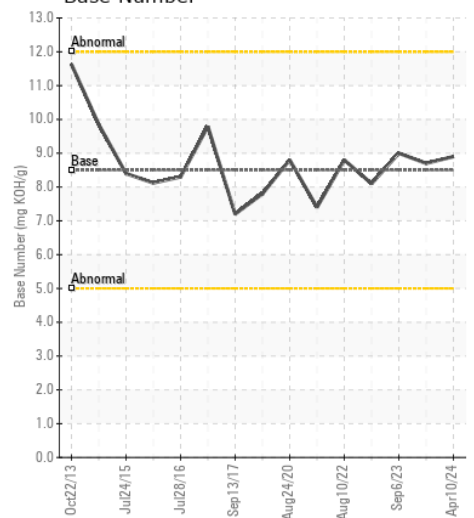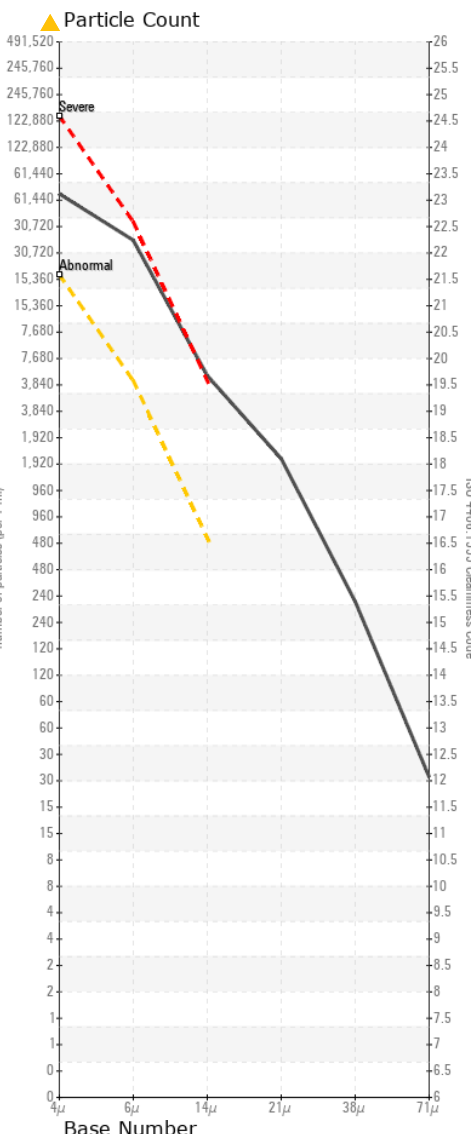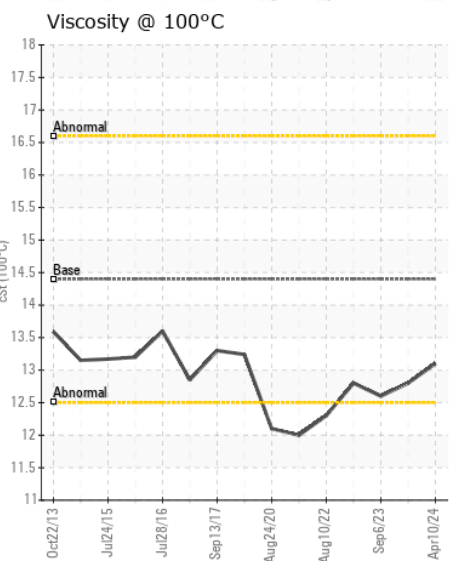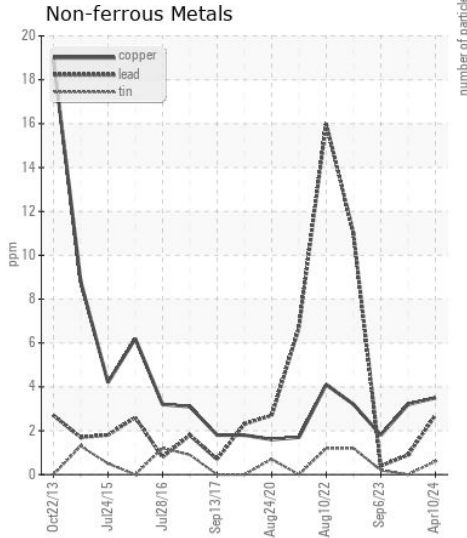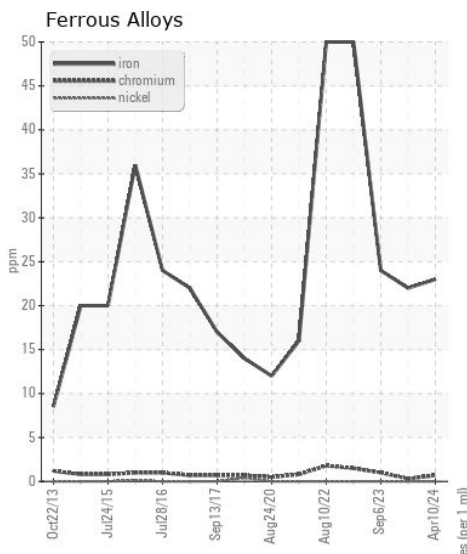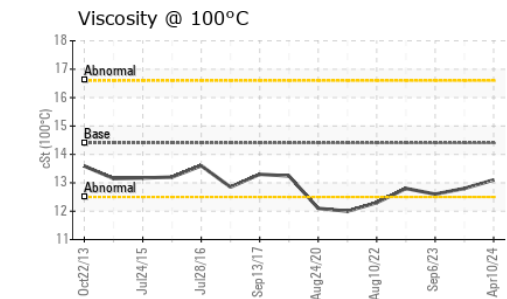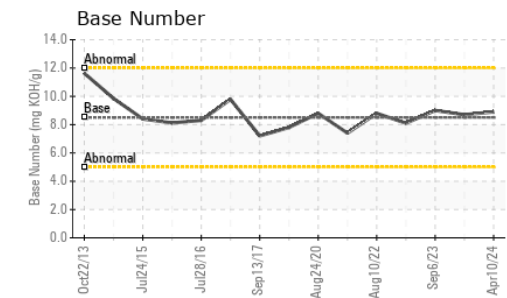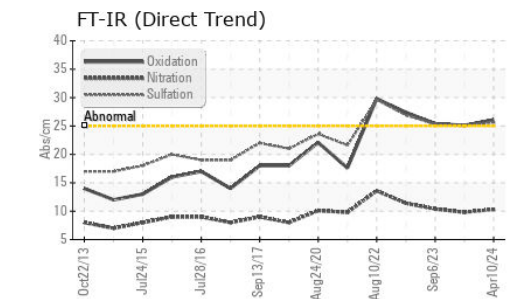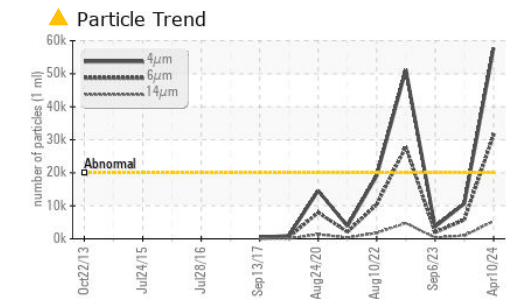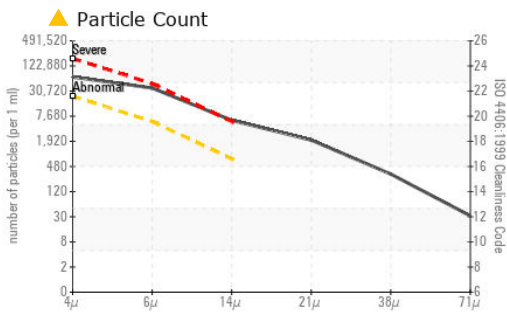

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0919056 **Received** : 12 Apr 2024  
**Lab Number** : 06147195 **Tested** : 15 Apr 2024  
**Unique Number** : 10977273 **Diagnosed** : 16 Apr 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: PrtCount, TBN )

**CAROLINA SUNROCK**  
 PO BOX 25  
 BUTNER, NC  
 US 27509  
 Contact: Leigh Dennis  
 rdennis@thesunrockgroup.com  
 T: (919)575-4505  
 F: (919)575-0162

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)