



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 410P 5477 (S/N 1DW410PALPFB06972)

Component
Hydraulic System

Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0206782	JR0192961	---
Sample Date		Client Info		10 Apr 2024	01 Dec 2023	---
Machine Age	hrs	Client Info		1051	558	---
Oil Age	hrs	Client Info		1051	558	---
Filter Age	hrs	Client Info		0	558	---
Oil Changed		Client Info		Not Changd	N/A	---
Filter Changed		Client Info		Not Changd	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	3	<1	---
Chromium	ppm	ASTM D5185m	>10	<1	0	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	1	0	---
Lead	ppm	ASTM D5185m	>10	1	0	---
Copper	ppm	ASTM D5185m	>75	2	0	---
Tin	ppm	ASTM D5185m	>10	1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	1	0	---
Potassium	ppm	ASTM D5185m	>20	3	0	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>5000	1997	1826	---
Particles >6µm		ASTM D7647	>1300	480	665	---
Particles >14µm		ASTM D7647	>160	37	93	---
Particles >21µm		ASTM D7647	>40	9	26	---
Particles >38µm		ASTM D7647	>10	0	1	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/12	18/17/14	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	1	---
Boron	ppm	ASTM D5185m		4	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		6	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m		15	0	---
Calcium	ppm	ASTM D5185m	87	107	88	---
Phosphorus	ppm	ASTM D5185m	727	700	675	---
Zinc	ppm	ASTM D5185m	900	802	810	---
Sulfur	ppm	ASTM D5185m	1500	1733	1583	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.76	0.68	---
Visc @ 40°C	cSt	ASTM D445	65	60.2	61.4	---

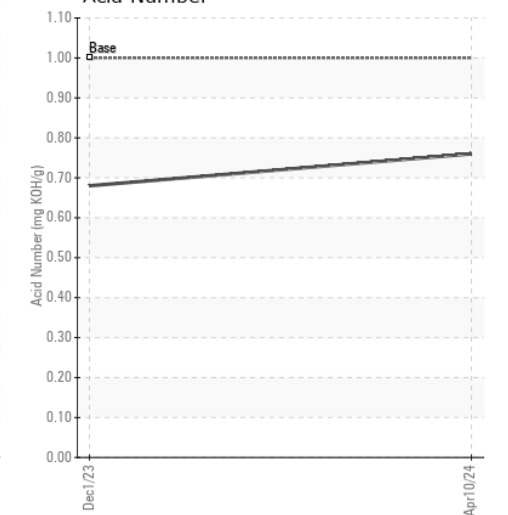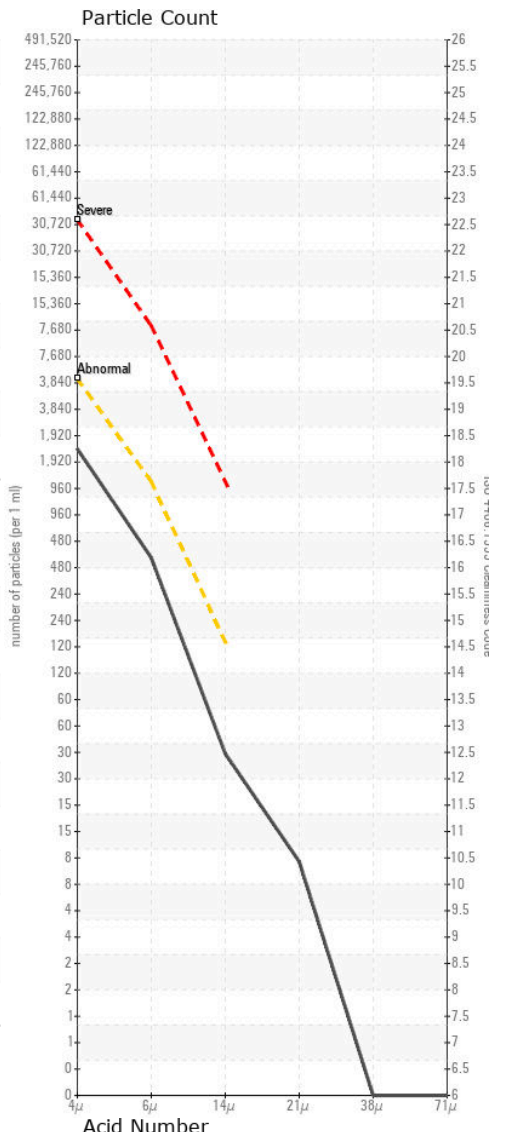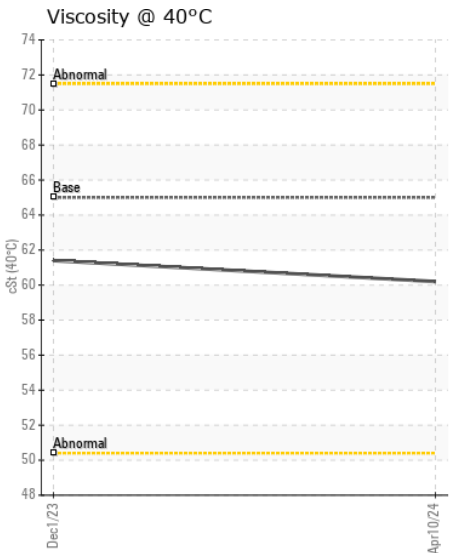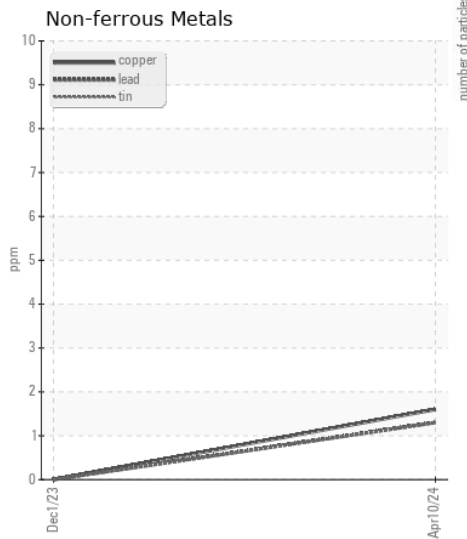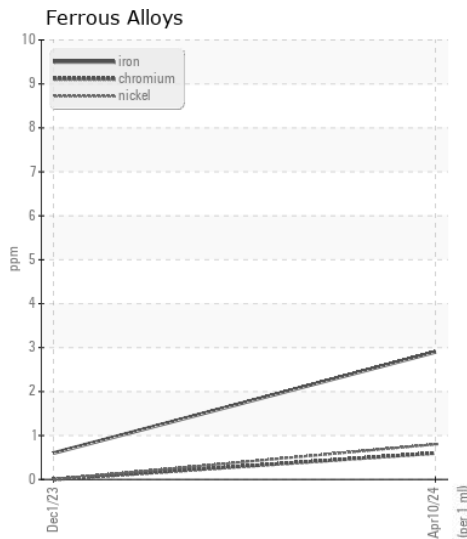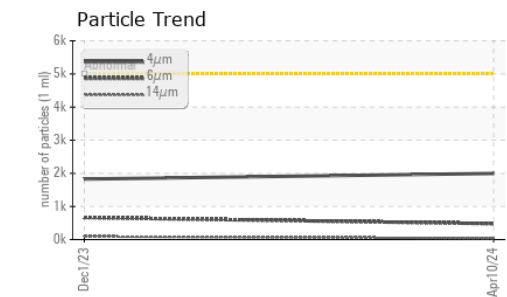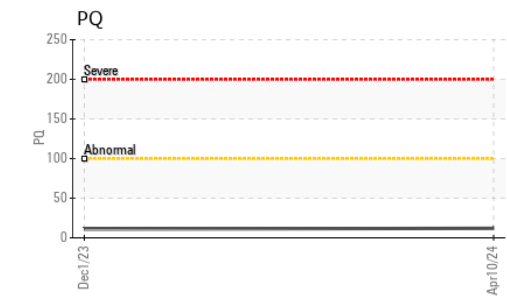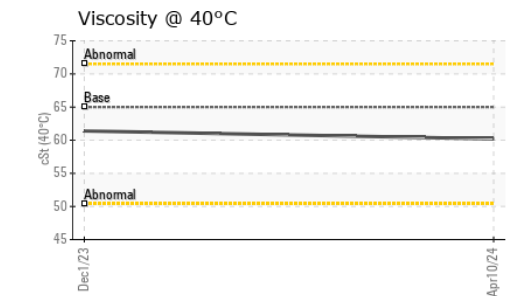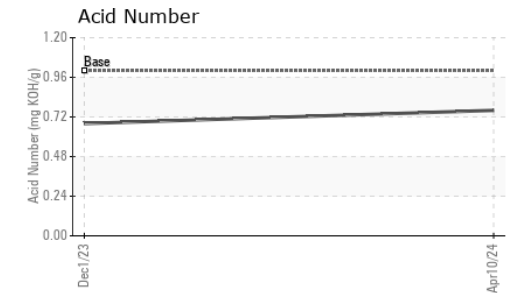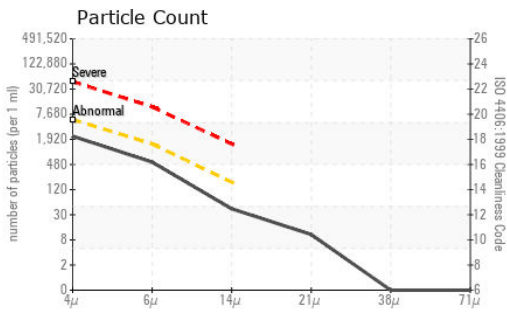

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0206782

Lab Number : 06147217

Unique Number : 10977295

Test Package : CONST (Additional Tests: PQ)

Received : 12 Apr 2024

Tested : 15 Apr 2024

Diagnosed : 15 Apr 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CK CONTRACTING

124-1 WOODING PL

KINGS MOUNTAIN, NC

US 28086

Contact: TAM WRIGHT

twright@ckcdllc.com

T: (704)730-9948

F: (704)730-9975