



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**AMR-Manchester**

Machine Id

**146889 LIEBHERR 146889**

Component

**Rear Differential**

Fluid

**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

## WEAR

All component wear rates are normal.

## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION










The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DJJ0013960</b>	DJJ0003545	---
Sample Date		Client Info		<b>27 Mar 2024</b>	08 Nov 2023	---
Machine Age	hrs	Client Info		<b>1079</b>	518	---
Oil Age	hrs	Client Info		<b>1000</b>	518	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

Iron	ppm	ASTM D5185m	>500	<b>52</b>	31	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>100	<b>48</b>	43	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

Silicon	ppm	ASTM D5185m	>75	<b>13</b>	10	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Water		WC Method	>.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	---

Sodium	ppm	ASTM D5185m		<b>4</b>	2	---
Boron	ppm	ASTM D5185m	0	<b>9</b>	7	---
Barium	ppm	ASTM D5185m	0	<b>2</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>1</b>	<1	---
Manganese	ppm	ASTM D5185m	0	<b>2</b>	1	---
Magnesium	ppm	ASTM D5185m	<1	<b>3</b>	0	---
Calcium	ppm	ASTM D5185m	<1	<b>123</b>	130	---
Phosphorus	ppm	ASTM D5185m	2143	<b>1755</b>	1450	---
Zinc	ppm	ASTM D5185m	<1	<b>35</b>	35	---
Sulfur	ppm	ASTM D5185m	23468	<b>26430</b>	20752	---
Visc @ 40°C	cSt	ASTM D445	170	<b>162</b>	159	---

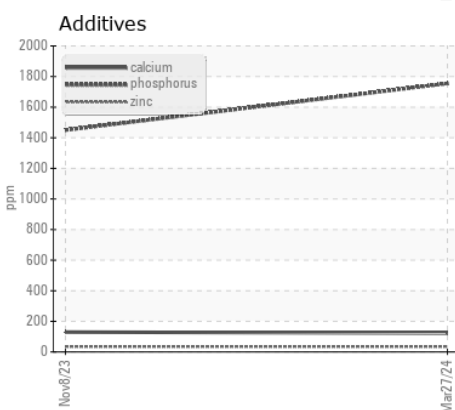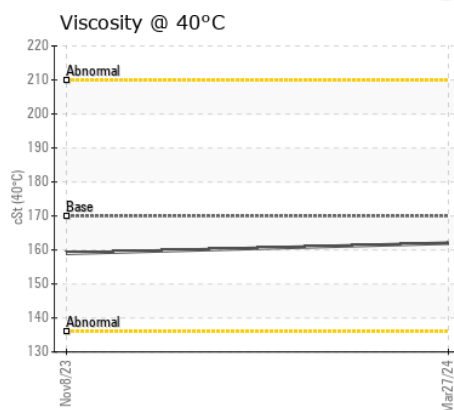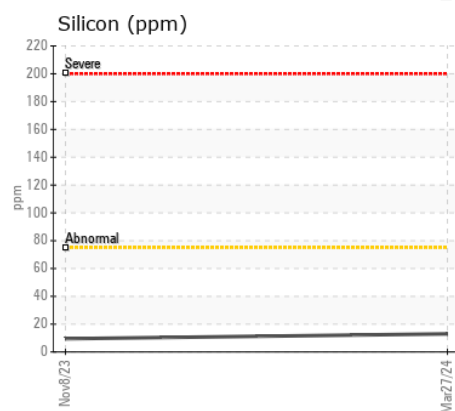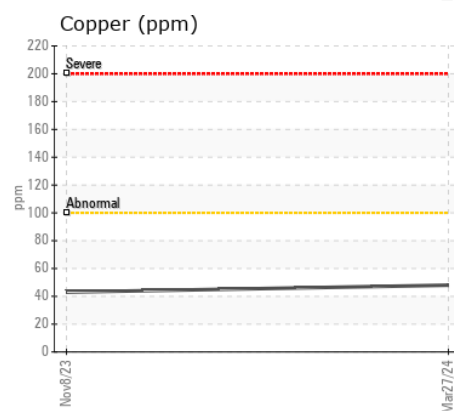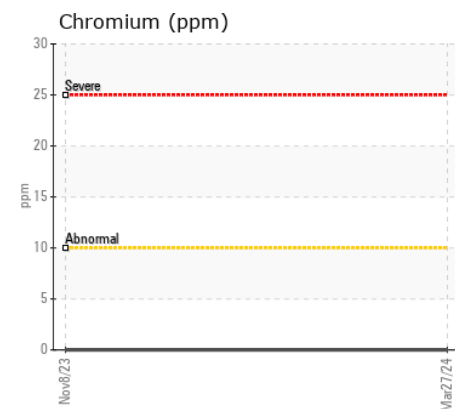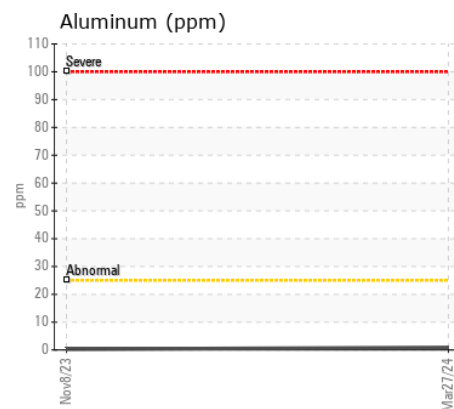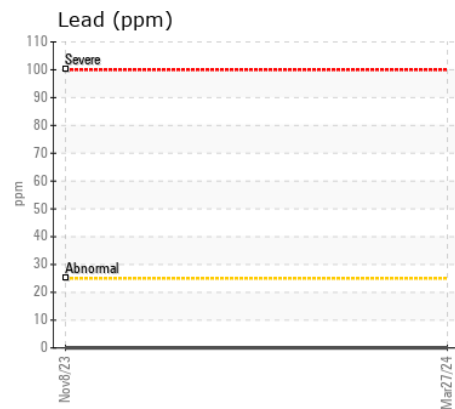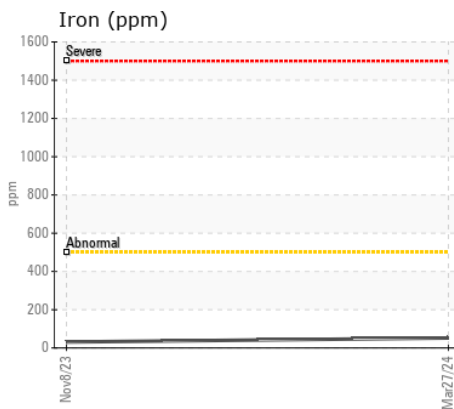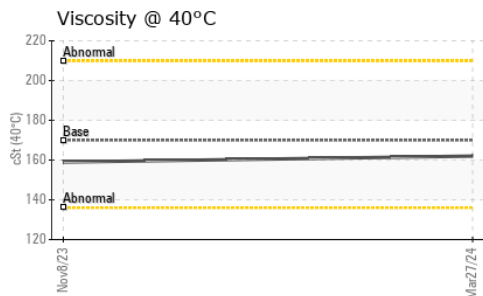

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DJJ0013960  
**Lab Number** : 06147658  
**Unique Number** : 10977736  
**Test Package** : MOBCE

**Received** : 12 Apr 2024  
**Tested** : 15 Apr 2024  
**Diagnosed** : 15 Apr 2024 - Wes Davis

**ADVANTAGE METALS RECYCLING - MANCHESTER**  
 3005 MANCHESTER TRAFFICWAY  
 KANSAS CITY, MO  
 US 64129

Contact: STEVE BROWN  
 steve.brown@advantagerecycling.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (816)922-5100  
 F: (816)861-7670