



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO A40G 353306**  
Component  
**Rear Axle**  
Fluid  
**{not provided} (9 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

**WEAR**

All component wear rates are normal.





**CONTAMINATION**

There is no indication of any contamination in the fluid.

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0001185</b>	VCP390632	---
Sample Date		Client Info		<b>08 Apr 2024</b>	13 Jan 2023	---
Machine Age	hrs	Client Info		<b>955</b>	1	---
Oil Age	hrs	Client Info		<b>955</b>	0	---
Filter Age	hrs	Client Info		<b>955</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---
Iron	ppm	ASTM D5185m	>900	<b>120</b>	16	---
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>0</b>	0	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>150	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>MODER</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m	>50	<b>2</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	4	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>4</b>	2	---
Boron	ppm	ASTM D5185m		<b>289</b>	299	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	3	---
Manganese	ppm	ASTM D5185m		<b>7</b>	4	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	2	---
Calcium	ppm	ASTM D5185m		<b>9</b>	10	---
Phosphorus	ppm	ASTM D5185m		<b>2412</b>	2168	---
Zinc	ppm	ASTM D5185m		<b>0</b>	5	---
Sulfur	ppm	ASTM D5185m		<b>32247</b>	27094	---
Visc @ 40°C	cSt	ASTM D445		<b>53.5</b>	52.4	---

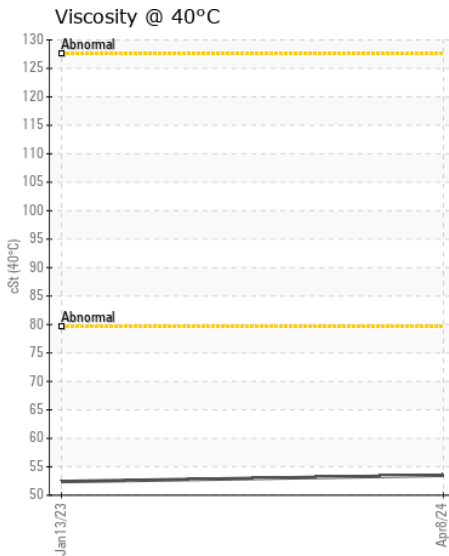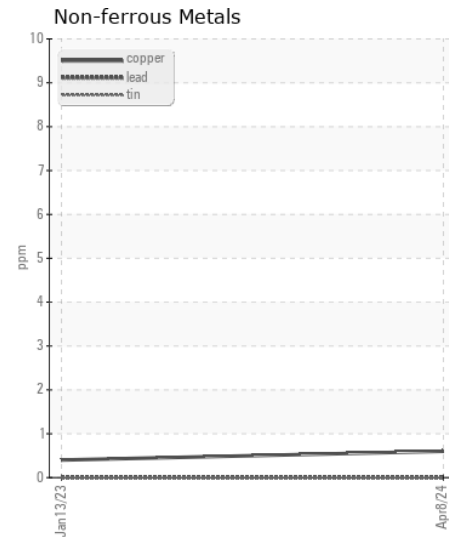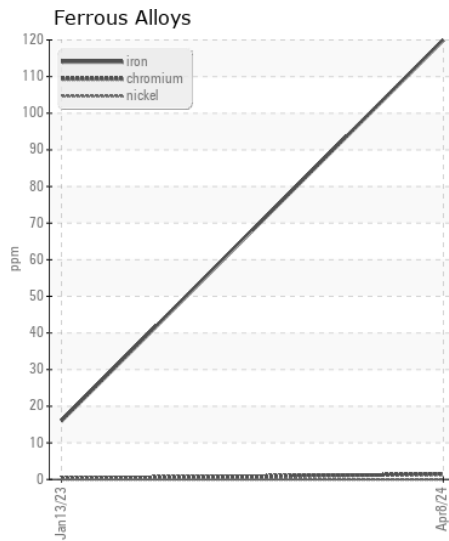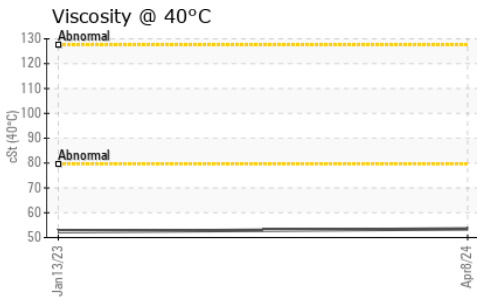

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0001185  
**Lab Number** : 06147718  
**Unique Number** : 10977796  
**Test Package** : CONST

**Received** : 12 Apr 2024  
**Tested** : 15 Apr 2024  
**Diagnosed** : 16 Apr 2024 - Sean Felton

**MCCLUNG-LOGAN EQUIPMENT CO - MANASSAS**  
 8450 QUARRY ROAD  
 MANASSAS, VA  
 US 20110  
 Contact: MIKE MAYHUGH  
 MMAYHUGH@MCCLUNG-LOGAN.COM  
 T: (703)393-7344  
 F: (703)393-7844

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)