



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area

**[25249]**

Machine Id

**VOLVO A45G 353380**

Component

**Front Axle**

Fluid

**VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP455248</b>	---	---
Sample Date		Client Info		<b>06 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>3883</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	<b>277</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>150	<b>1</b>	---	---
Tin	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>5</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>4</b>	---	---
Boron	ppm	ASTM D5185m		<b>187</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>4</b>	---	---
Manganese	ppm	ASTM D5185m		<b>11</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>3</b>	---	---
Calcium	ppm	ASTM D5185m		<b>171</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>2292</b>	---	---
Zinc	ppm	ASTM D5185m		<b>62</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>29617</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>51.8</b>	---	---

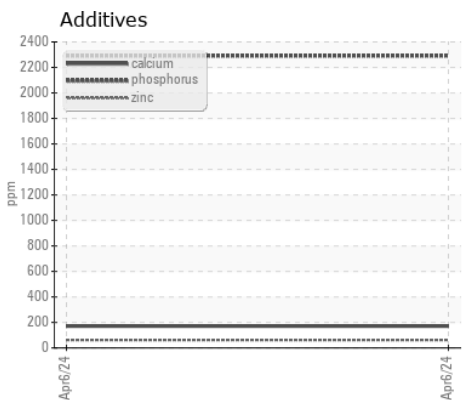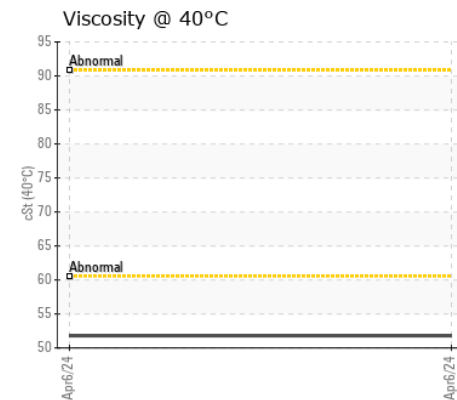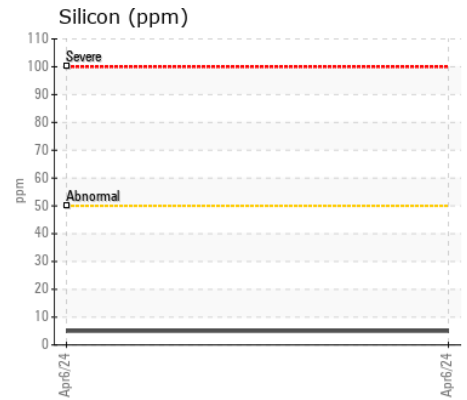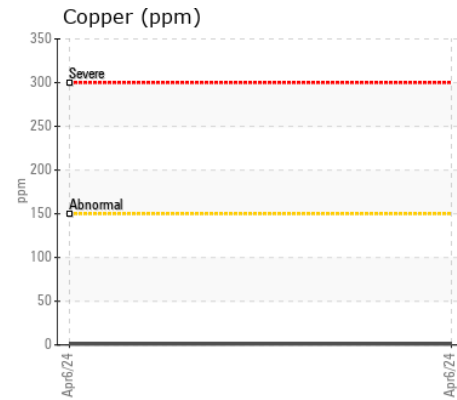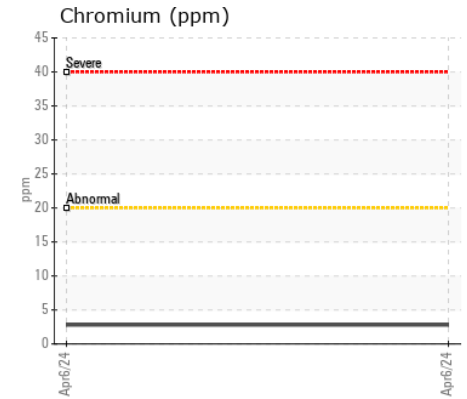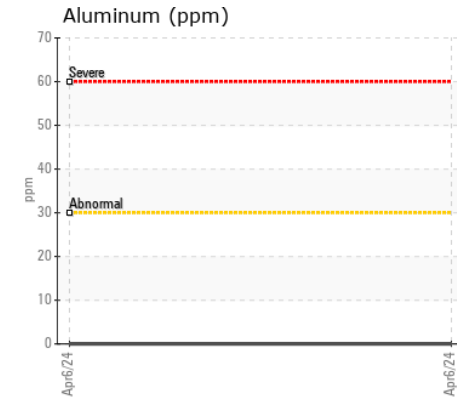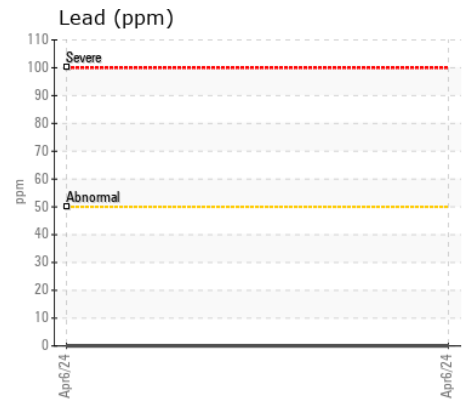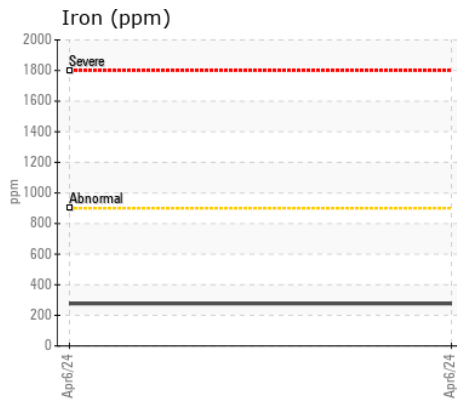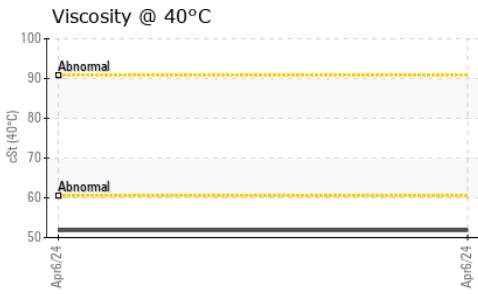

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP455248  
**Lab Number** : 06147725  
**Unique Number** : 10977803  
**Test Package** : MOB 1

**218 - ASCENDUM MACHINERY INC - N. CHARLESTON**  
 7235 CROSS COUNTRY RD.  
 NORTH CHARLESTON, SC  
 US 29418

Contact: MATT MITCHAM  
 matt.mitcham@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (843)414-1129