



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
DEISTER 14045 UPPER HOUSING
 Component
Bearing
 Fluid
MOBIL SHC 632 (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0921838	WC0760484	WC0647572
Sample Date		Client Info		10 Apr 2024	23 Feb 2023	11 Feb 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		2717	1785	1152
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	54	40	45
Chromium	ppm	ASTM D5185m	>5	0	0	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m	>5	0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	2
Lead	ppm	ASTM D5185m	>50	4	<1	<1
Copper	ppm	ASTM D5185m	>150	35	5	9
Tin	ppm	ASTM D5185m	>10	2	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	16	12
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	<1	1
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		0	<1	<1
Calcium	ppm	ASTM D5185m		1	1	<1
Phosphorus	ppm	ASTM D5185m		449	477	475
Zinc	ppm	ASTM D5185m		<1	1	0
Sulfur	ppm	ASTM D5185m		16	144	92
Visc @ 40°C	cSt	ASTM D445	325.8	342	335	344

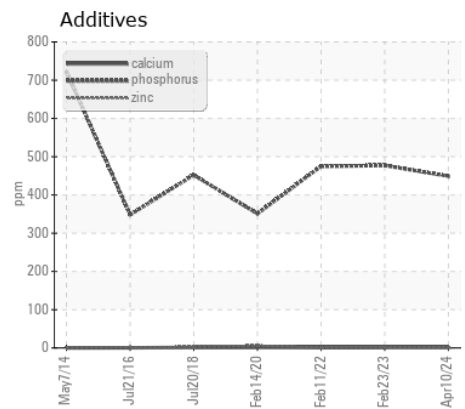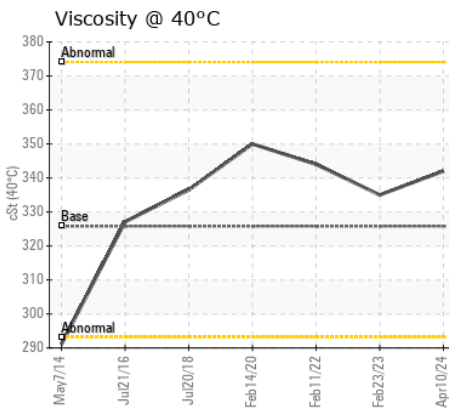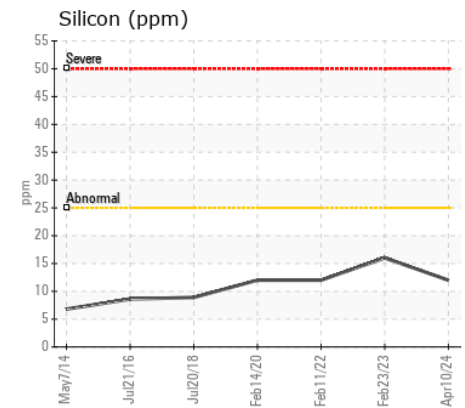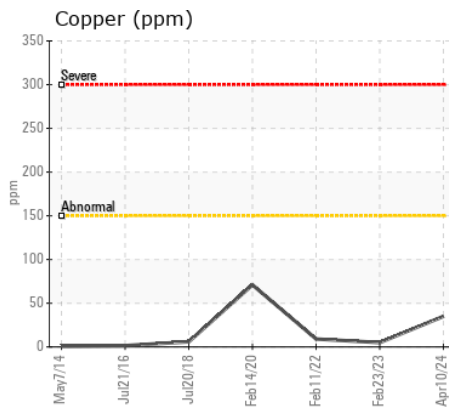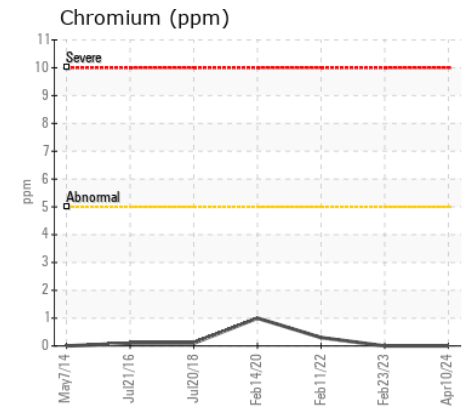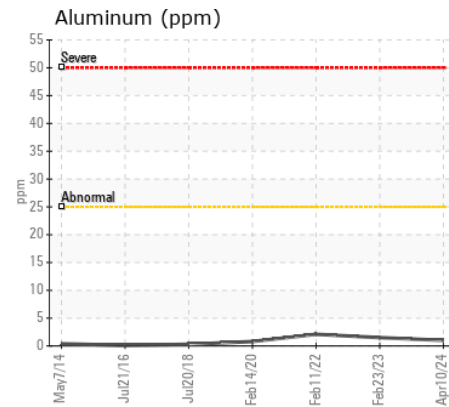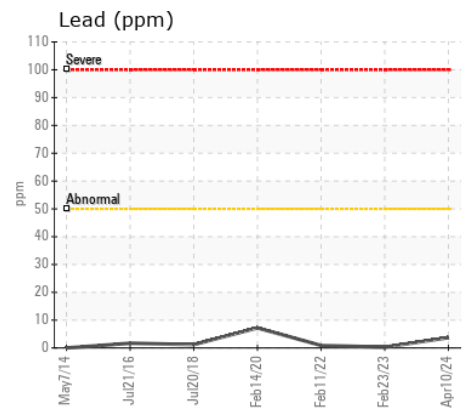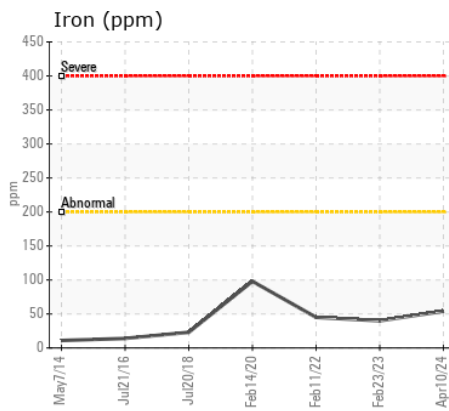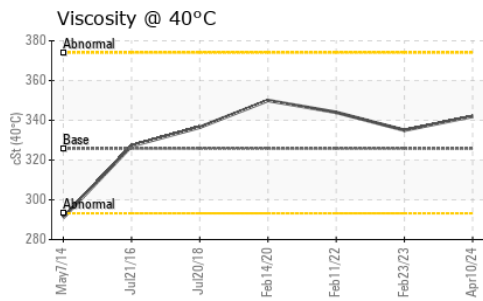

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0921838
Lab Number : 06147751
Unique Number : 10977829
Test Package : MOB 1
Received : 12 Apr 2024
Tested : 18 Apr 2024
Diagnosed : 18 Apr 2024 - Jonathan Hester

WAKE STONE CORPORATION-MONCURE
P.O. BOX 158
MONCURE, NC
US 27559
Contact: ROBBIE BOGAN
robbiebogan@wakestonecorp.com
T:
F: (919)776-1341

To discuss this sample report, contact Customer Service at 1-800-237-1369.
* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)