



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**MTL 75BFMII 3251-02-06**  
 Component  
**3 Winch**  
 Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0026667	---	---
Sample Date		Client Info		13 Mar 2024	---	---
Machine Age	yrs	Client Info		0	---	---
Oil Age	yrs	Client Info		1	---	---
Filter Age	yrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	10	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>5	0	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>80	1	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<1	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m	400	141	---	---
Barium	ppm	ASTM D5185m	200	<1	---	---
Molybdenum	ppm	ASTM D5185m	12	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	12	1	---	---
Calcium	ppm	ASTM D5185m	150	39	---	---
Phosphorus	ppm	ASTM D5185m	1650	1074	---	---
Zinc	ppm	ASTM D5185m	125	12	---	---
Sulfur	ppm	ASTM D5185m	22500	22127	---	---
Visc @ 40°C	cSt	ASTM D445	109	105	---	---

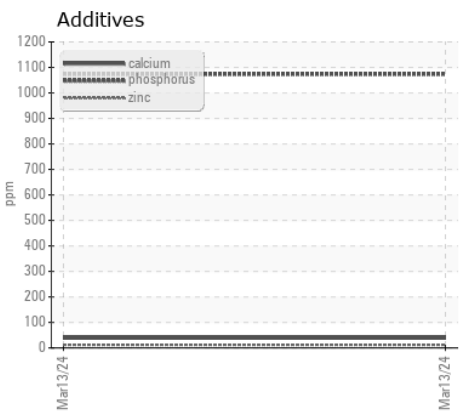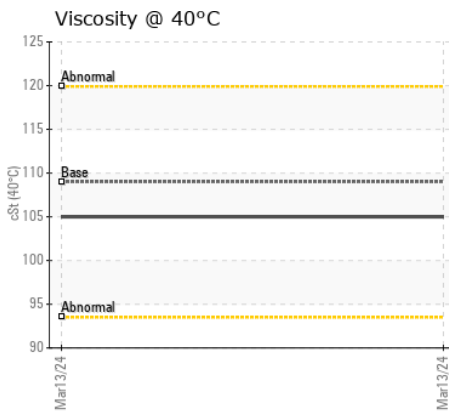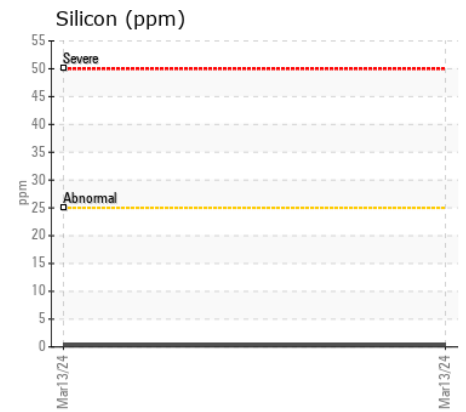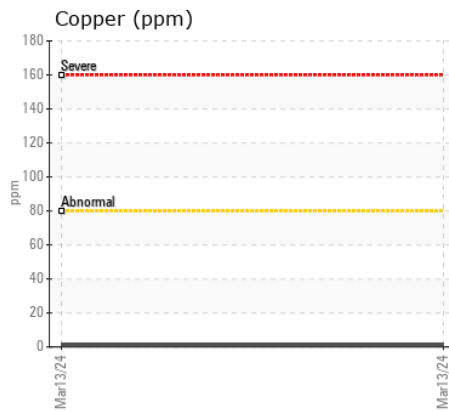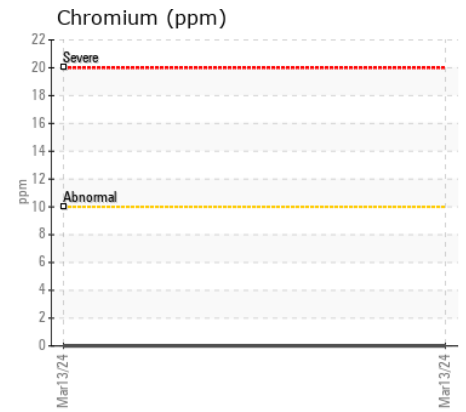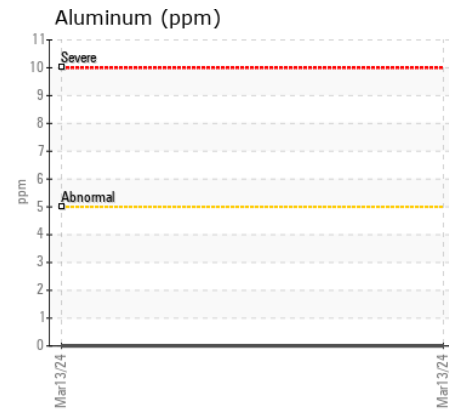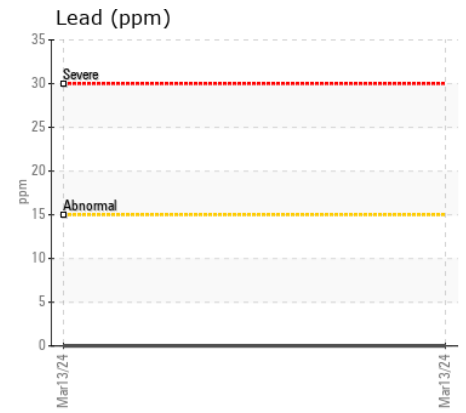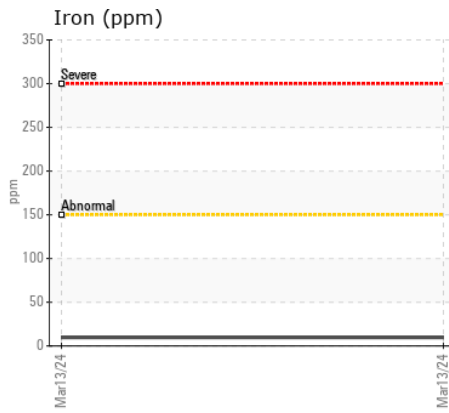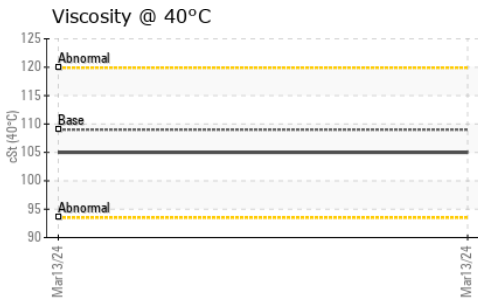

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : DC0026667  
 Lab Number : 06147791  
 Unique Number : 10977869  
 Test Package : MOB 1

Received : 12 Apr 2024  
 Tested : 15 Apr 2024  
 Diagnosed : 16 Apr 2024 - Don Baldrige

**CRANWORKS INC - SPECIAL PROJECTS**  
 11089 LEADBETTER ROAD  
 ASHLAND, VA  
 US 23005  
 Contact: JOSH DIXON  
 jdixon@vacraneworks.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: