



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO L150H 5363**  
Component  
**Rear Axle**  
Fluid  
**MOBIL MOBILFLUID 424 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0000119</b>	ML0000157	VCP436343
Sample Date		Client Info		<b>10 Apr 2024</b>	13 Feb 2024	19 Dec 2023
Machine Age	hrs	Client Info		<b>9968</b>	9727	9491
Oil Age	hrs	Client Info		<b>1957</b>	1716	1480
Filter Age	hrs	Client Info		<b>1957</b>	1716	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>237</b>	191	163
Chromium	ppm	ASTM D5185m	>20	<b>3</b>	2	2
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	<1	<1
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>120	<b>2</b>	2	1
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**





There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m	>50	<b>12</b>	10	10
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	2	<1
Boron	ppm	ASTM D5185m		<b>101</b>	91	80
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>10</b>	8	6
Manganese	ppm	ASTM D5185m		<b>2</b>	2	2
Magnesium	ppm	ASTM D5185m		<b>34</b>	30	31
Calcium	ppm	ASTM D5185m		<b>3729</b>	3189	3309
Phosphorus	ppm	ASTM D5185m		<b>1301</b>	1141	1201
Zinc	ppm	ASTM D5185m		<b>1486</b>	1287	1370
Sulfur	ppm	ASTM D5185m		<b>5113</b>	3936	4105
Visc @ 40°C	cSt	ASTM D445	55	<b>45.2</b>	45.4	45.3

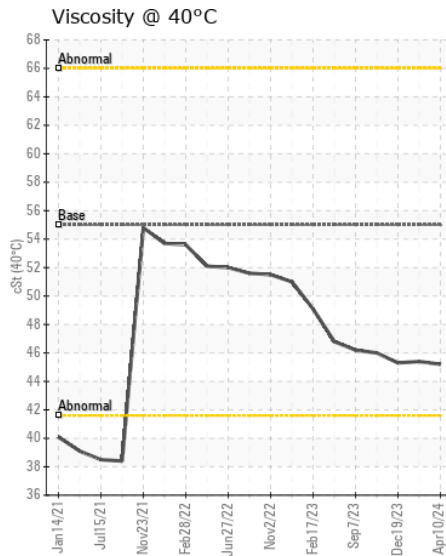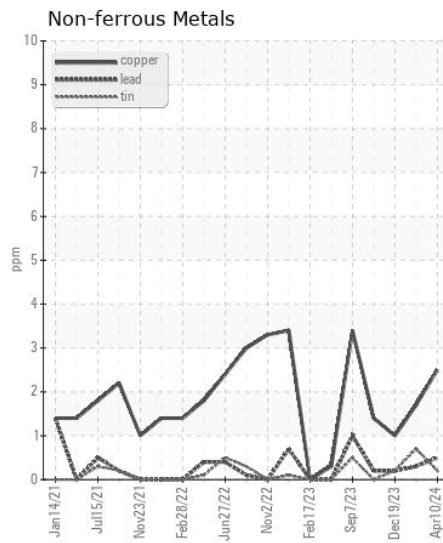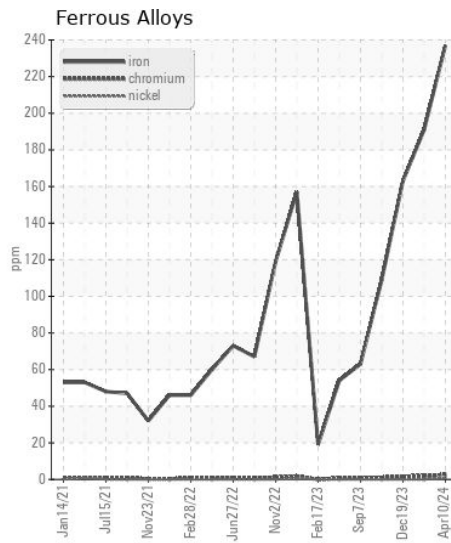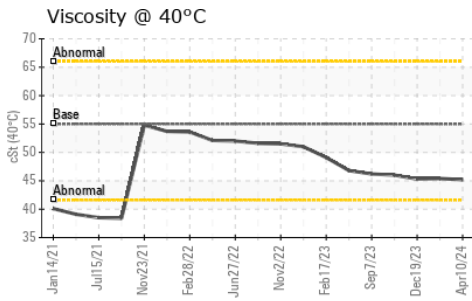

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0000119  
**Lab Number** : 06147806  
**Unique Number** : 10977884  
**Test Package** : CONST

**Received** : 12 Apr 2024  
**Tested** : 15 Apr 2024  
**Diagnosed** : 16 Apr 2024 - Don Baldrige

**MARYLAND ENVIRONMENTAL SERVICES**  
 21210 MARTINSBURG RD  
 DICKERSON, MD  
 US 20842  
 Contact: ALAN PARRISH  
 aparr@menv.com  
 T: (301)428-8185  
 F: (301)428-8311

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)