



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO L260H 1290
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION





The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0010176	VCP436531	ASC0006239
Sample Date		Client Info		10 Apr 2024	04 Mar 2024	06 Feb 2024
Machine Age	hrs	Client Info		6351	6084	5886
Oil Age	hrs	Client Info		2000	0	1200
Filter Age	hrs	Client Info		2000	0	1200
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>160	119	92	83
Chromium	ppm	ASTM D5185m	>5	1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	2	<1	<1
Lead	ppm	ASTM D5185m	>50	<1	0	0
Copper	ppm	ASTM D5185m	>225	3	3	2
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>20	3	2	2
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		1	3	2
Boron	ppm	ASTM D5185m		93	94	101
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		2	2	2
Magnesium	ppm	ASTM D5185m		2	7	1
Calcium	ppm	ASTM D5185m		142	100	73
Phosphorus	ppm	ASTM D5185m		252	186	195
Zinc	ppm	ASTM D5185m		31	20	2
Sulfur	ppm	ASTM D5185m		2106	1687	1656
Visc @ 40°C	cSt	ASTM D445	35.0	27.8	28.0	27.9

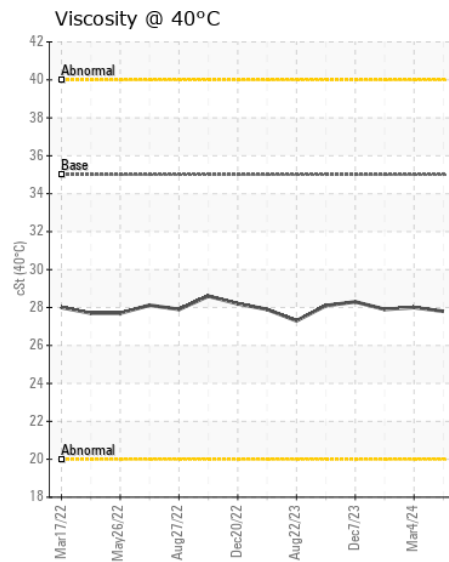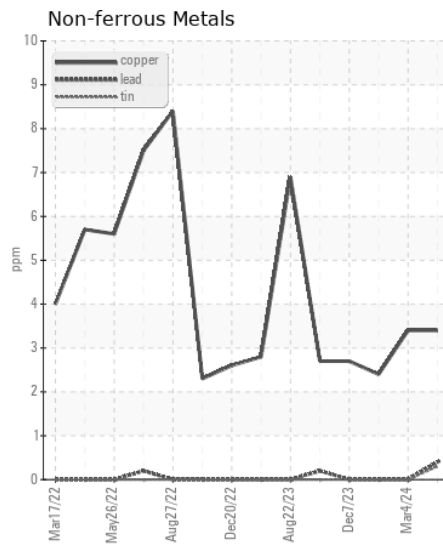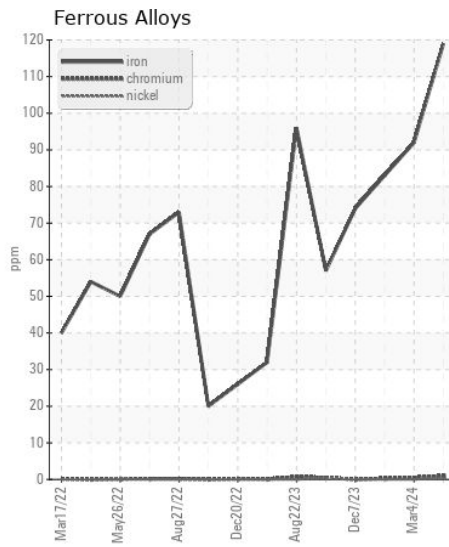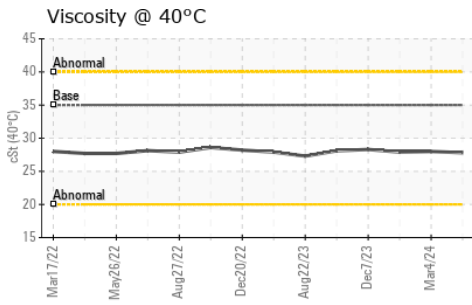

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0010176
Lab Number : 06147838
Unique Number : 10977916
Test Package : CONST
Received : 12 Apr 2024
Tested : 15 Apr 2024
Diagnosed : 15 Apr 2024 - Wes Davis

HANSON SOUTHEAST
 NC HWY 117
 ERWIN, NC
 US 28339
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: