



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**821081**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0118487</b>	GFL0095332	---
Sample Date		Client Info		<b>04 Apr 2024</b>	09 Jan 2024	---
Machine Age	hrs	Client Info		<b>0</b>	7646	---
Oil Age	hrs	Client Info		<b>0</b>	650	---
Filter Age	hrs	Client Info		<b>0</b>	650	---
Oil Changed		Client Info		<b>Not Changd</b>	Changed	---
Filter Changed		Client Info		<b>Not Changd</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>50</b>	16	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	0	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	2	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>10</b>	<1	---
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>17</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>31</b>	33	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.9	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.3</b>	7.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.5</b>	19.2	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>49</b>	31	---
Boron	ppm	ASTM D5185m	0	<b>0</b>	<1	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	60	<b>65</b>	61	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m	1010	<b>921</b>	939	---
Calcium	ppm	ASTM D5185m	1070	<b>1074</b>	1022	---
Phosphorus	ppm	ASTM D5185m	1150	<b>966</b>	964	---
Zinc	ppm	ASTM D5185m	1270	<b>1145</b>	1264	---
Sulfur	ppm	ASTM D5185m	2060	<b>3193</b>	2946	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.9</b>	13.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.0</b>	8.2	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.9</b>	13.8	---

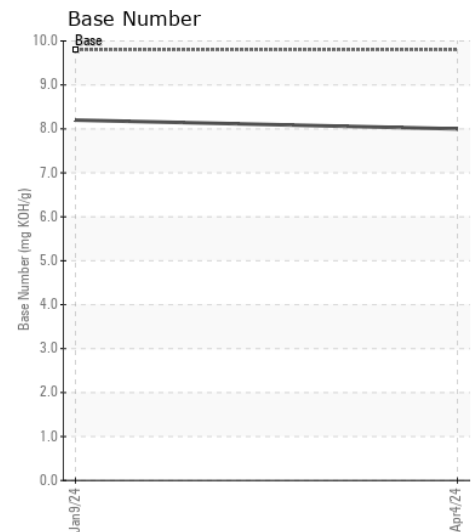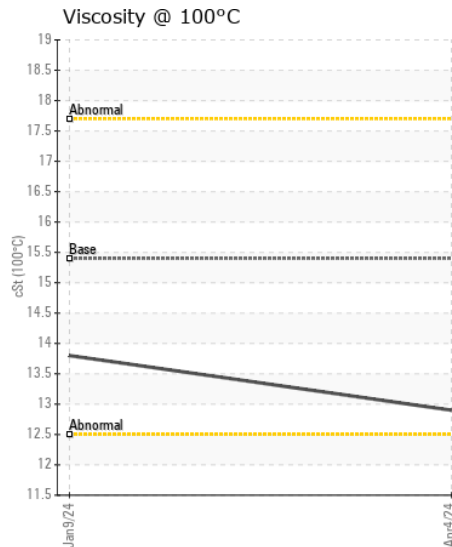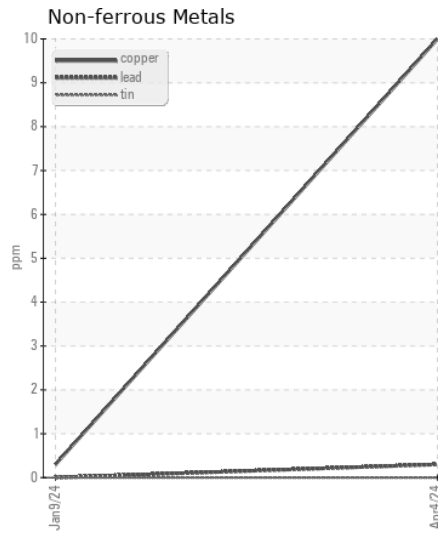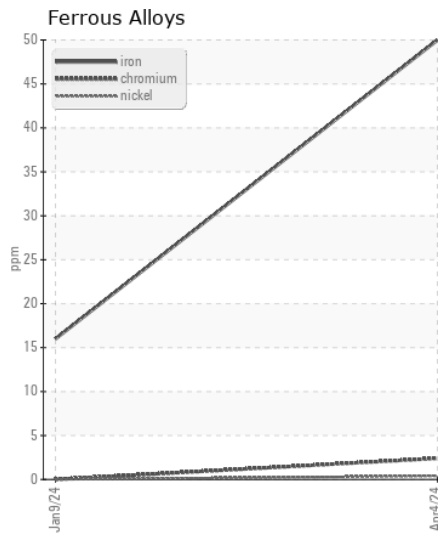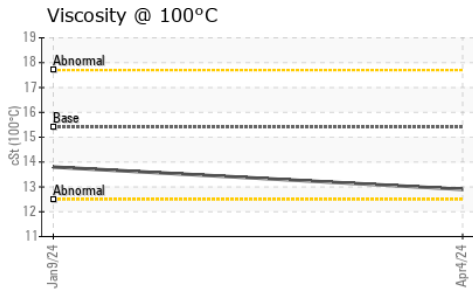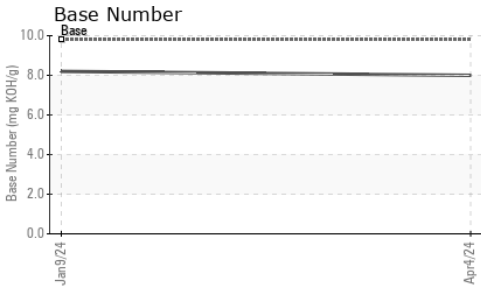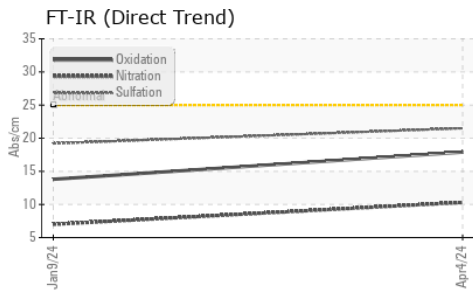

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0118487  
**Lab Number** : 06148036  
**Unique Number** : 10978114  
**Test Package** : FLEET

**Received** : 12 Apr 2024  
**Tested** : 15 Apr 2024  
**Diagnosed** : 15 Apr 2024 - Wes Davis

**GFL Environmental - 893 - OK East Hauling**  
 2100 Lilly Street  
 Seminole, OK  
 US 74868

Contact: Roger Barlow  
 rbarlow@gflenv.com

T: (405)204-6183

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)