



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

DANIEL P MECKLENBORG

Machine Id

[DANIEL P MECKLENBORG] 006 608409-6

Component

Starboard Reduction Gear

Fluid

CHEVRON MEROPA 320 (150 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW06148121	MW0058569	MW06017512
Sample Date		Client Info		01 Apr 2024	01 Dec 2023	01 Nov 2023
Machine Age	hrs	Client Info		148990	148445	147743
Oil Age	hrs	Client Info		14899	0	147743
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	26	26	24
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	4	4	4
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	2
Lead	ppm	ASTM D5185m	>100	<1	0	0
Copper	ppm	ASTM D5185m	>50	4	4	3
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	1	<1	1
Potassium	ppm	ASTM D5185m	>20	3	3	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	0.2%

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	2	4
Boron	ppm	ASTM D5185m	20	3	3	4
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	0	1	<1	1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		1	<1	2
Calcium	ppm	ASTM D5185m	25	58	52	51
Phosphorus	ppm	ASTM D5185m	235	283	313	223
Zinc	ppm	ASTM D5185m		3	0	0
Sulfur	ppm	ASTM D5185m		9267	9212	9099
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	1.04	0.96	0.94
Visc @ 40°C	cSt	ASTM D445	304	318	316	316

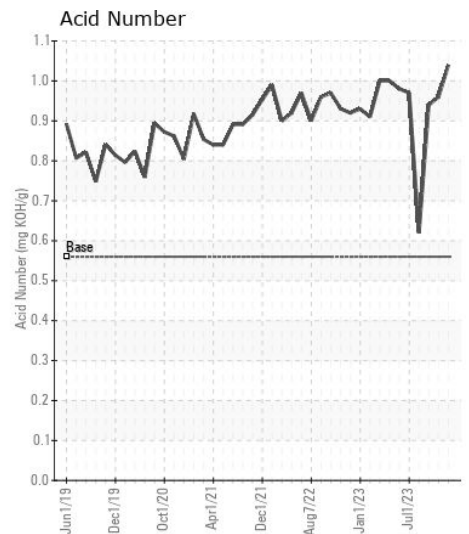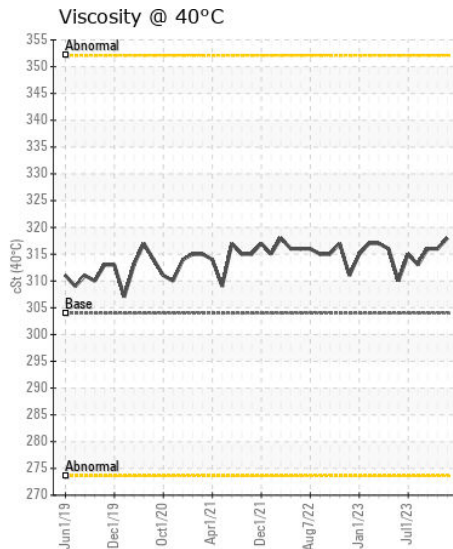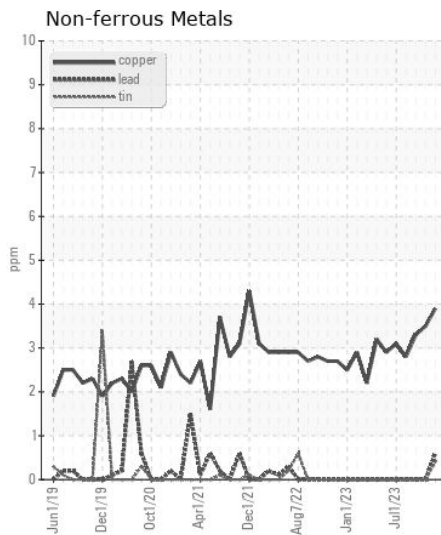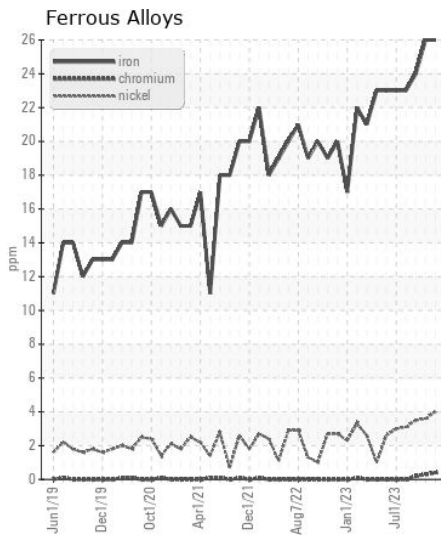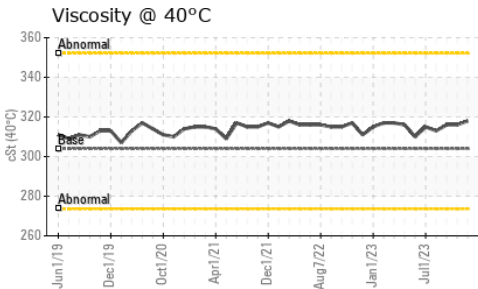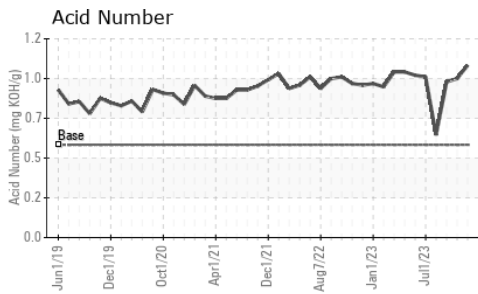

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW06148121

Lab Number : 06148121

Unique Number : 10978199

Test Package : MAR 2

Received : 12 Apr 2024

Tested : 15 Apr 2024

Diagnosed : 15 Apr 2024 - Wes Davis

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: DALE MORIE

dale.morie@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)