



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
JOHN M DONNELLY
Machine Id
[**JOHN M DONNELLY**] 002 621298-2
Component
Center Main Engine
Fluid
CHEVRON DELO 710 LE (150 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0061247	MW0061220	MW0017907
Sample Date		Client Info		01 Apr 2024	21 Mar 2024	02 Sep 2023
Machine Age	hrs	Client Info		10113	9852	0
Oil Age	hrs	Client Info		10113	9852	7773
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	9	12	10
Chromium	ppm	ASTM D5185m	>8	2	2	2
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	2	2
Lead	ppm	ASTM D5185m	>18	6	6	8
Copper	ppm	ASTM D5185m	>80	14	13	10
Tin	ppm	ASTM D5185m	>14	6	6	7
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	4	5	4
Potassium	ppm	ASTM D5185m	>20	2	2	3
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	8.8	8.8	8.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.9	17.2	16.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<1	3	<1
Boron	ppm	ASTM D5185m		44	43	37
Barium	ppm	ASTM D5185m		0	0	3
Molybdenum	ppm	ASTM D5185m		52	50	48
Manganese	ppm	ASTM D5185m		2	2	<1
Magnesium	ppm	ASTM D5185m		10	13	13
Calcium	ppm	ASTM D5185m		3920	3459	3553
Phosphorus	ppm	ASTM D5185m		9	19	6
Zinc	ppm	ASTM D5185m	10	0	15	10
Sulfur	ppm	ASTM D5185m		2814	2260	2538
Oxidation	Abs/.1mm	*ASTM D7414	>25	9.2	9.2	8.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	8.98	8.80	9.17
Visc @ 100°C	cSt	ASTM D445	15.5	15.0	15.0	14.9

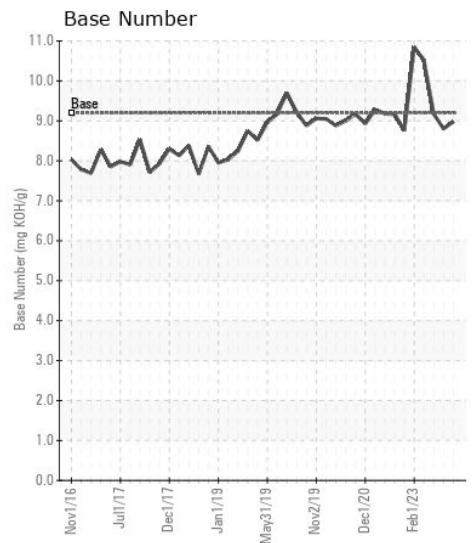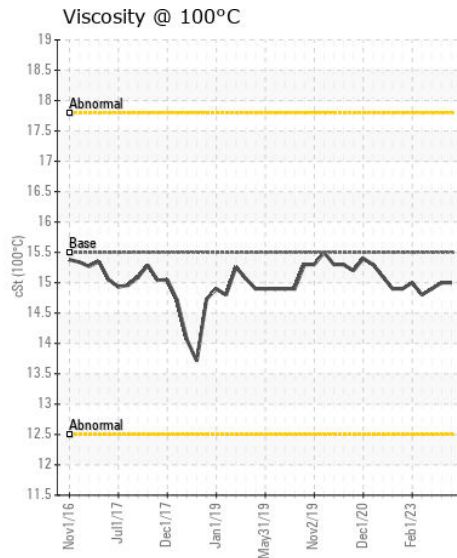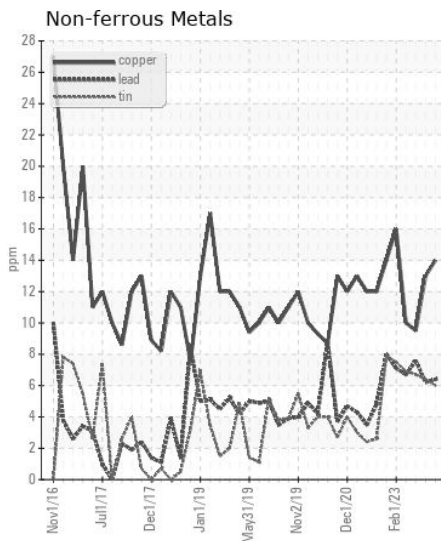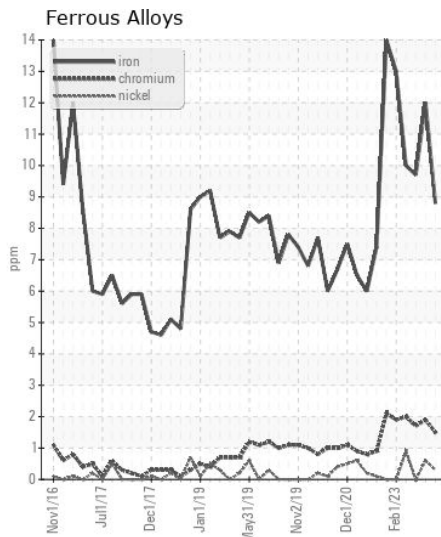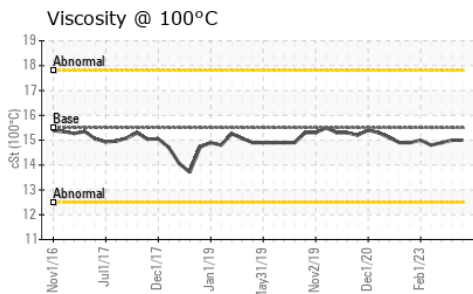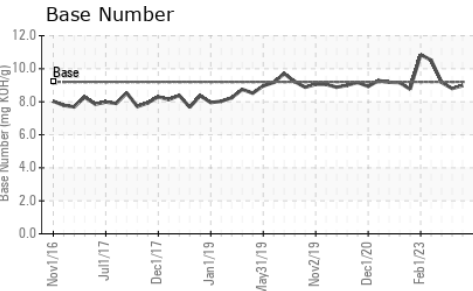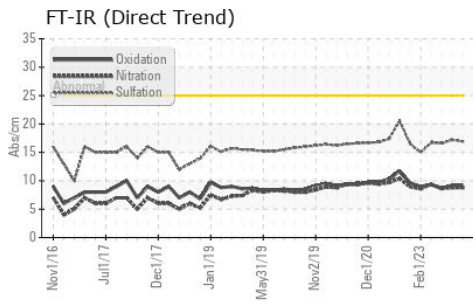

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0061247
Lab Number : 06148163
Unique Number : 10978241
Test Package : MAR 2
Received : 12 Apr 2024
Tested : 15 Apr 2024
Diagnosed : 15 Apr 2024 - Wes Davis

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003
 Contact: ALLEN WILLHELM
 allen.willhelm@ingrambarge.com
 T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)