



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id  
**CR1227**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0823398</b>	WC0746619	WC0687204
Sample Date		Client Info		<b>08 Apr 2024</b>	07 Oct 2022	05 Aug 2022
Machine Age	hrs	Client Info		<b>1994</b>	678	415
Oil Age	hrs	Client Info		<b>500</b>	0	415
Filter Age	hrs	Client Info		<b>500</b>	0	415
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ATTENTION</b>	NORMAL	MARGINAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>11</b>	11	23
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	1
Lead	ppm	ASTM D5185m	>40	<b>4</b>	6	2
Copper	ppm	ASTM D5185m	>330	<b>27</b>	50	72
Tin	ppm	ASTM D5185m	>15	<b>3</b>	4	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION









Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>7</b>	6	21
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	1
Fuel	%	ASTM D3524	>5	<b>0.7</b>	<1.0	0.9
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.4</b>	7.5	11.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.3</b>	22.3	42.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>158	<b>&lt;1</b>	1	0
Boron	ppm	ASTM D5185m	250	<b>128</b>	27	89
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	8
Molybdenum	ppm	ASTM D5185m	100	<b>66</b>	59	43
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	6
Magnesium	ppm	ASTM D5185m	450	<b>444</b>	826	849
Calcium	ppm	ASTM D5185m	3000	<b>1890</b>	1358	1288
Phosphorus	ppm	ASTM D5185m	1150	<b>1093</b>	1024	691
Zinc	ppm	ASTM D5185m	1350	<b>1308</b>	1230	834
Sulfur	ppm	ASTM D5185m	4250	<b>3715</b>	3922	2195
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.0</b>	18.8	52.7
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.6</b>	10.1	7.0
Visc @ 100°C	cSt	ASTM D445	14.4	<b>11.5</b>	14.1	12.4

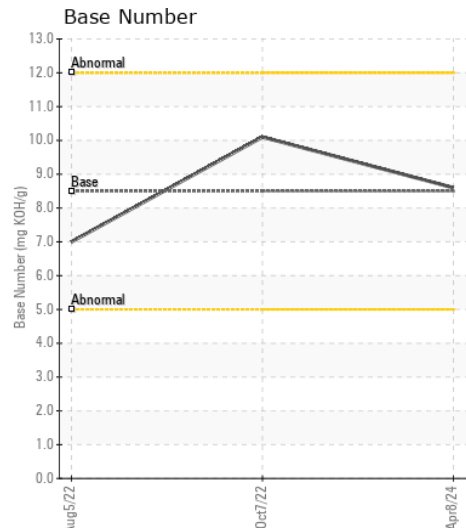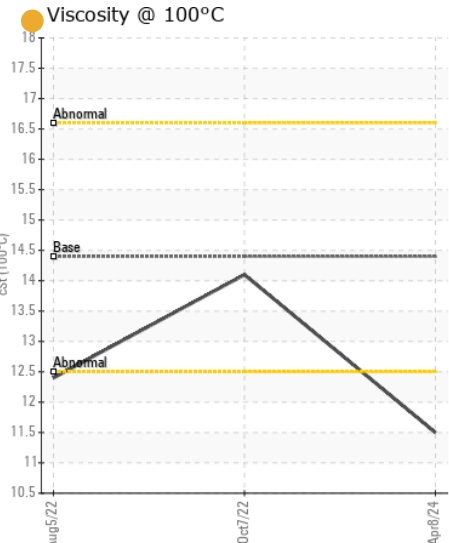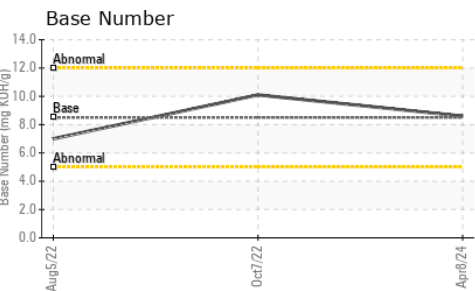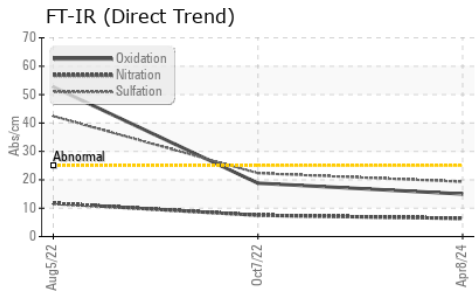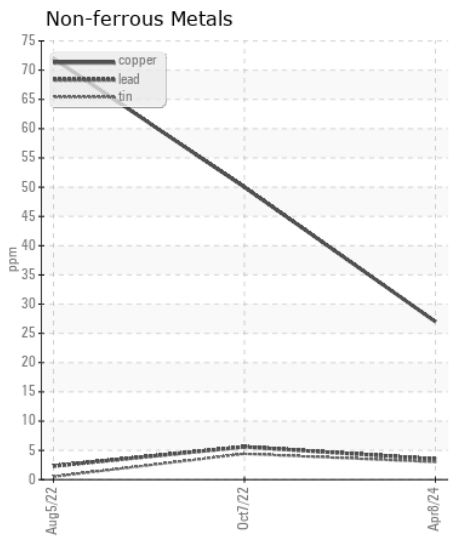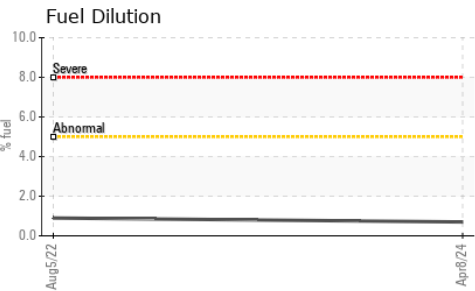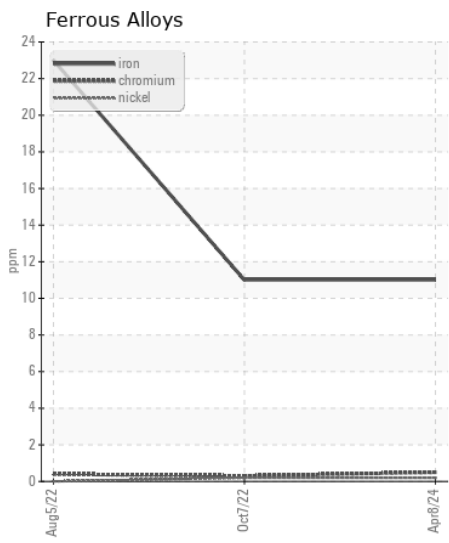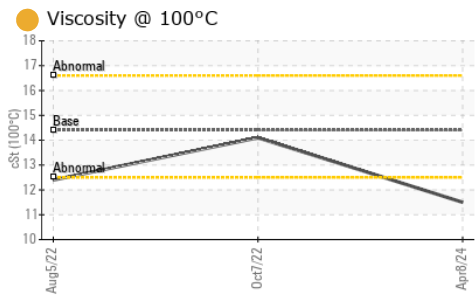

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0823398 **Received** : 15 Apr 2024  
**Lab Number** : 06148336 **Tested** : 19 Apr 2024  
**Unique Number** : 10978414 **Diagnosed** : 19 Apr 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: FuelDilution, PercentFuel, TBN )

**BUCKNER HEAVY LIFT**  
 4732 NC 54 EAST  
 GRAHAM, NC  
 US 27253-9215  
 Contact: MICHAEL LAWSON  
 michael@bucknercompanies.com  
 T: (336)376-8888  
 F: (336)376-4090

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)