



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**VOLVO L260H 1352**  
Component  
**Diesel Engine**  
Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP436826</b>	VCP369874	---
Sample Date		Client Info		<b>09 Apr 2024</b>	06 Dec 2023	---
Machine Age	hrs	Client Info		<b>1631</b>	917	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	N/A	---
Filter Changed		Client Info		<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>9</b>	24	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	3	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	3	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>44</b>	174	---
Tin	ppm	ASTM D5185m	>15	<b>2</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>8</b>	29	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	5	---
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	0.3	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.7</b>	9.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.3</b>	21.3	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	4	---
Boron	ppm	ASTM D5185m	2.5	<b>3</b>	17	---
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0.7	<b>63</b>	87	---
Manganese	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m	256	<b>865</b>	128	---
Calcium	ppm	ASTM D5185m	2057	<b>1316</b>	2053	---
Phosphorus	ppm	ASTM D5185m	935	<b>1049</b>	950	---
Zinc	ppm	ASTM D5185m	1223	<b>1273</b>	1200	---
Sulfur	ppm	ASTM D5185m	4079	<b>3224</b>	3181	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.5</b>	15.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>7.2</b>	5.1	---
Visc @ 100°C	cSt	ASTM D445	15.0	<b>13.0</b>	11.3	---

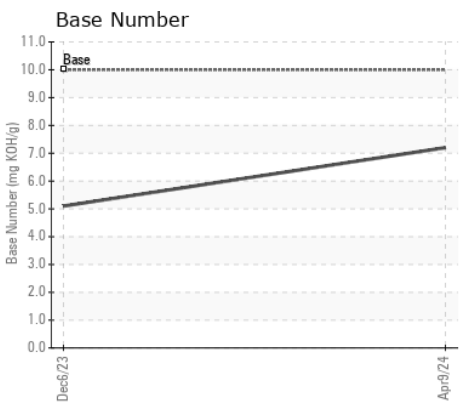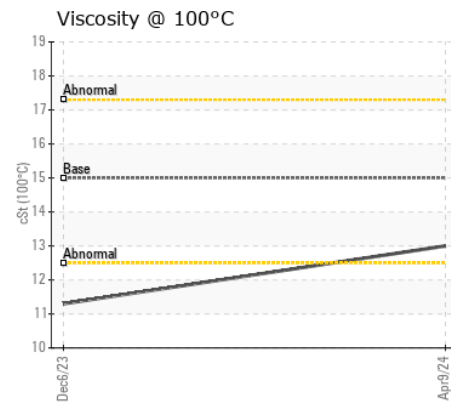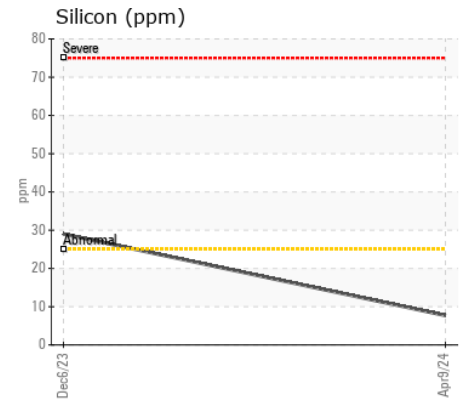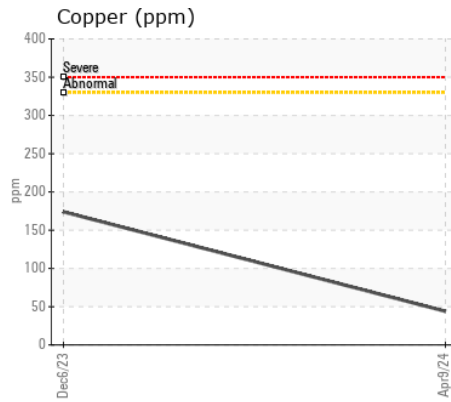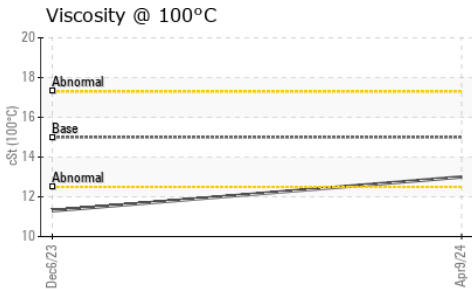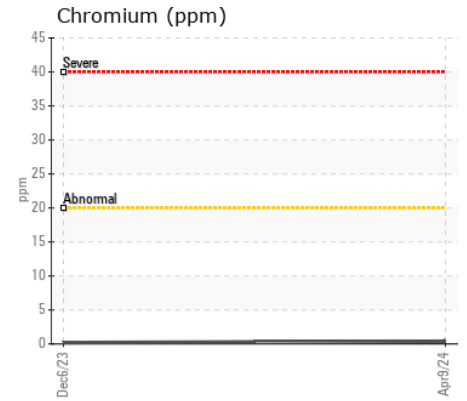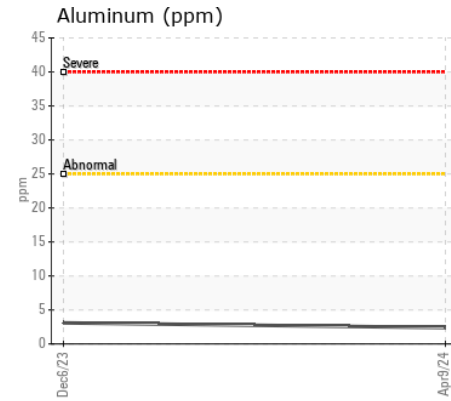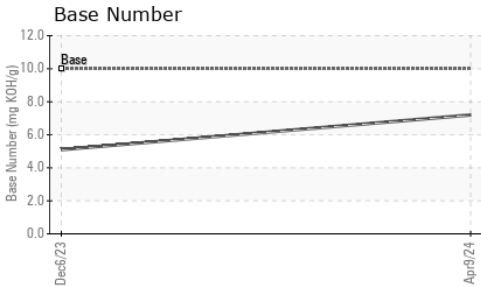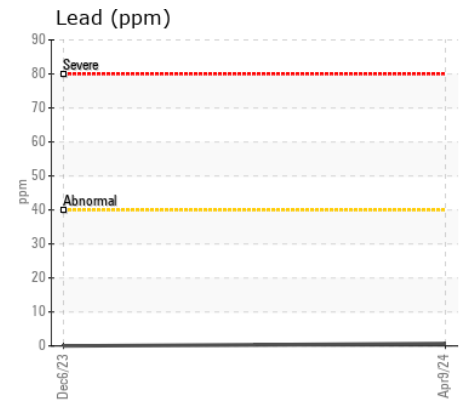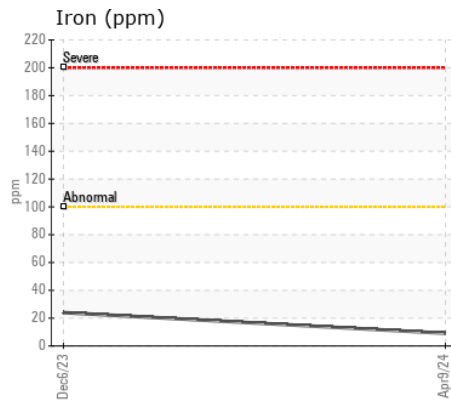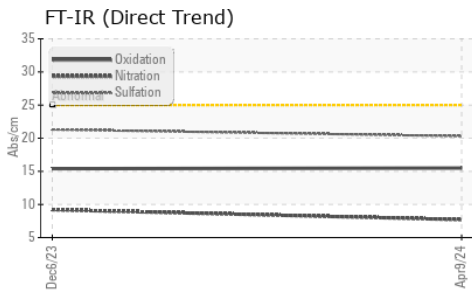

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP436826 **Received** : 15 Apr 2024  
**Lab Number** : 06148360 **Tested** : 16 Apr 2024  
**Unique Number** : 10978438 **Diagnosed** : 16 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**ALTA EQUIPMENT COMPANY**  
 5151 DR MARTIN LUTHER KING BLVD  
 FORT MYERS, FL  
 US 33905  
 Contact: TODD LARK  
 tlark@altaequipfl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (239)481-3302