
**WEAR** CONTAMINATION **FLUID CONDITION** 

**NORMAL NORMAL NORMAL** 

Machine Id 18063

## Component Diesel Engine

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
	Sample Number		Client Info		IL0033312		
Resample at the next service interval to monitor. Please specify the component make and model with your next sample.	Sample Date		Client Info		11 Mar 2024		
	Machine Age	mls	Client Info		55219		
	Oil Age	mls	Client Info		10773		
	Filter Age	mls	Client Info		10773		
	Oil Changed		Client Info		Changed		
	Filter Changed		Client Info		Changed		
	Sample Status				NORMAL		
VEAR	Iron	nnm	ASTM D5185m	> 100	15		
WEAR	Chromium	ppm	ASTM D5185m		15 1		
Metal levels are typical for a new component breaking in.	Nickel	ppm	ASTM D5185m		1		
	Titanium	ppm	ASTM D5185m	>4			
	Silver	ppm		. 0	<1		
		ppm	ASTM D5185m		0		
	Aluminum	ppm	ASTM D5185m ASTM D5185m		10		
	Lead	ppm			2		
	Copper	ppm	ASTM D5185m		7		
	Tin	ppm	ASTM D5185m	>15	1		
	Vanadium	ppm	ASTM D5185m	NONE	<1		
	White Metal	scalar	*Visual	NONE	NONE		
<u></u>	Yellow Metal	scalar	*Visual	NONE	NONE		
CONTAMINATION	Silicon	ppm	ASTM D5185m	>25	14		
There is no indication of any contamination in the oil.	Potassium	ppm	ASTM D5185m	>20	21		
	Fuel		WC Method	>5	<1.0		
	Water		WC Method	>0.2	NEG		
	Glycol		WC Method		NEG		
	Soot %	%	*ASTM D7844	>3	0.2		
	Nitration	Abs/cm	*ASTM D7624	>20	8.1		
	Sulfation	Abs/.1mm	*ASTM D7415	>30	20.7		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.2	NEG		
LUID CONDITION	Sodium	ppm	ASTM D5185m		2		
	Boron	ppm	ASTM D5185m	0	83		
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Barium	ppm	ASTM D5185m		0		
	Molybdenum	ppm	ASTM D5185m		82		
	Manganese	ppm	ASTM D5185m	O	1		
	Magnesium	ppm	ASTM D5185m	0	611		
	Calcium	ppm	ASTM D5185m		1611		
	Phosphorus	ppm	ASTM D5185m		844		
	Zinc	ppm	ASTM D5185m		1005		
	Sulfur	ppm	ASTM D5185m		3212		
	Oxidation	Abs/.1mm	*ASTM D3163111	>25	18.4		
	Base Number (BN)				8.4		
	Dase Mullipel (DIN)	my NOTI/y	HOTIVI DZ030	5.4	0.4		

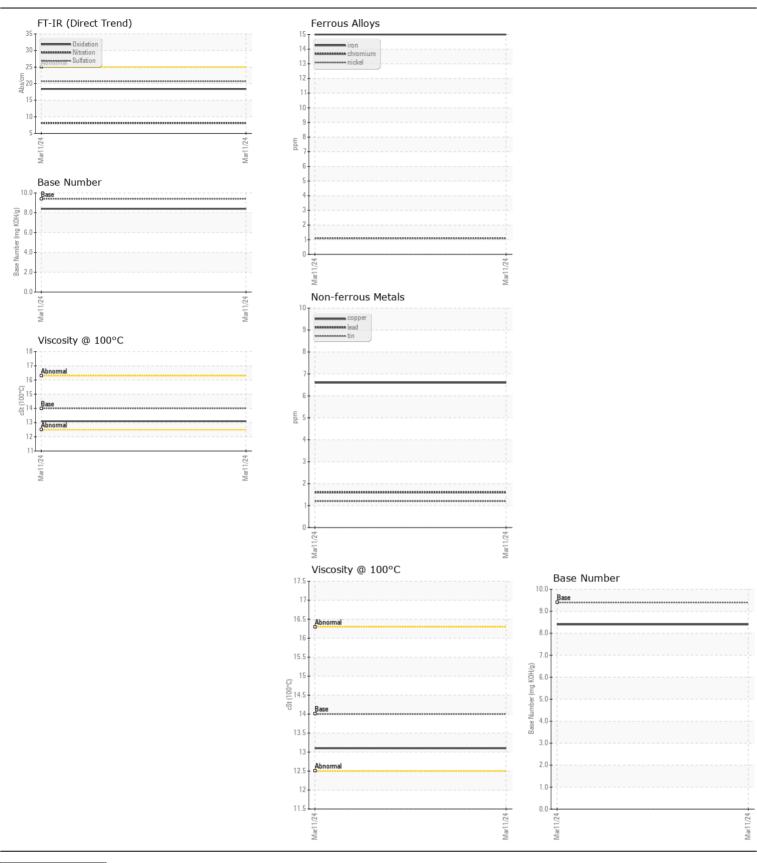





Certificate L2367

Laboratory

Sample No.

: IL0033312 Lab Number : 06148379 Unique Number: 10978457 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 15 Apr 2024 **Tested** : 15 Apr 2024

Diagnosed : 15 Apr 2024 - Wes Davis

RUSH TRUCK LEASING - EFFINGHAM Idealease 1701 WEST FAYETTE AVENUE EFFINGHAM, IL

US 62401 Contact: JACKIE OHNESORGE ohnesorgej@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (217)342-9761 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (217)342-9642