



LEAHY-WOLF
Lubricating specialists since 1946

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
INTERNATIONAL 5001
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0009002	LW0008626	LW0007887
Sample Date		Client Info		09 Apr 2024	27 Jan 2024	10 Oct 2023
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	31	33	55
Chromium	ppm	ASTM D5185m	>20	2	<1	2
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	2	0
Lead	ppm	ASTM D5185m	>40	5	5	12
Copper	ppm	ASTM D5185m	>330	<1	<1	1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	2	6
Potassium	ppm	ASTM D5185m	>20	2	2	2
Fuel		WC Method	>2.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	2.9	▲ 4	▲ 5.6
Nitration	Abs/cm	*ASTM D7624	>20	9.9	10.6	13.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.6	25.0	29.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<1	0	2
Boron	ppm	ASTM D5185m	250	<1	2	5
Barium	ppm	ASTM D5185m	10	0	<1	1
Molybdenum	ppm	ASTM D5185m	100	65	58	52
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	1018	886	862
Calcium	ppm	ASTM D5185m	3000	1160	1044	1085
Phosphorus	ppm	ASTM D5185m	1150	1167	981	972
Zinc	ppm	ASTM D5185m	1350	1311	1147	1208
Sulfur	ppm	ASTM D5185m	4250	3467	3072	3082
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.1	15.7	17.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.4	4.5	▲ 0.0
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	15.0	▲ 17.3

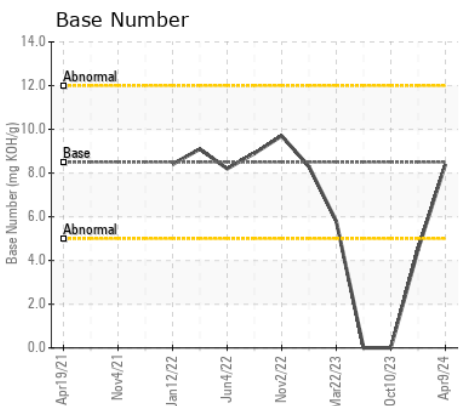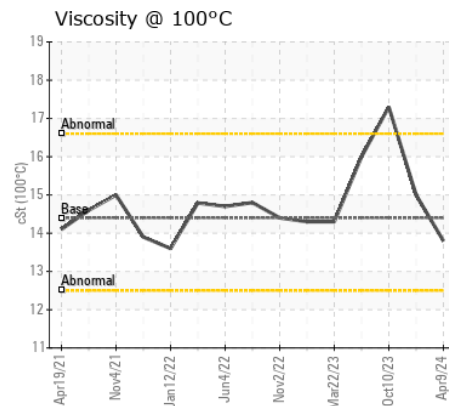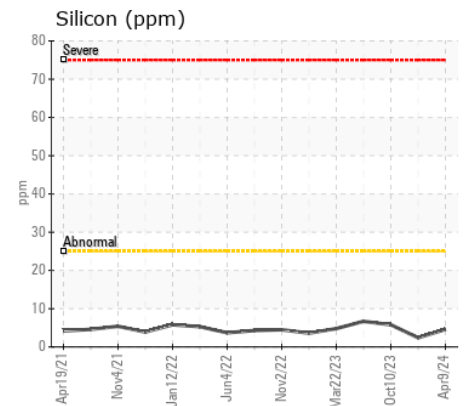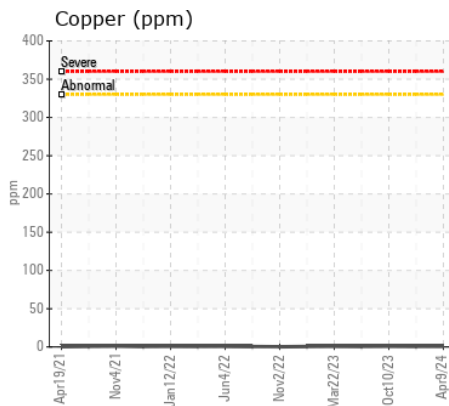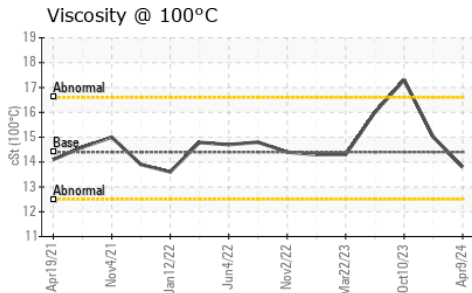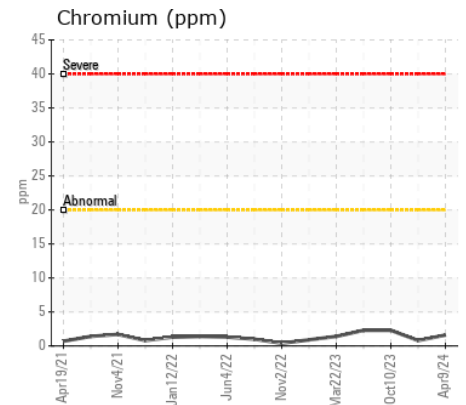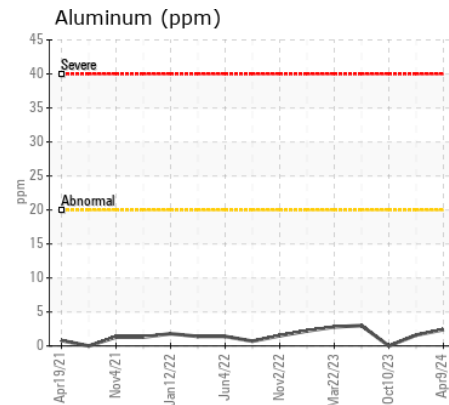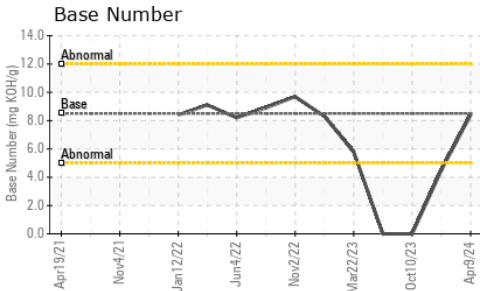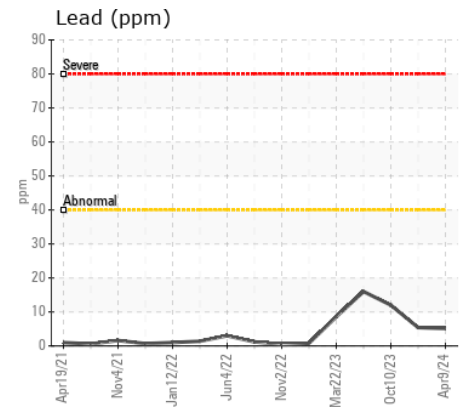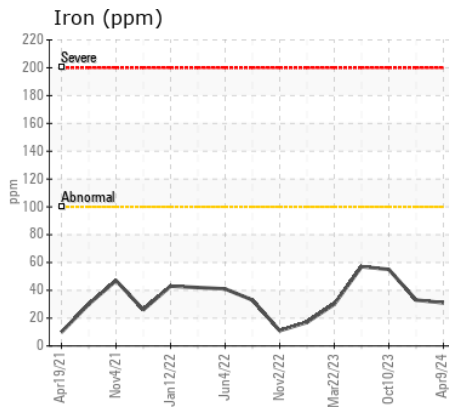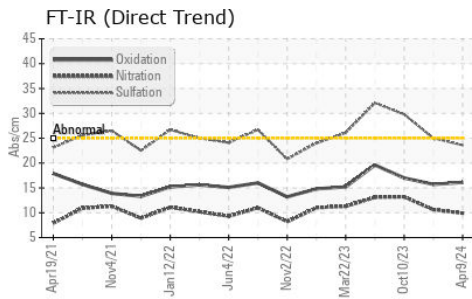

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LW0009002
Lab Number : 06148426
Unique Number : 10978504
Test Package : MOB 1 (Additional Tests: TBN)

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 16 Apr 2024 - Wes Davis

LRs - NILES
 33541 REUM RD
 NILES, MI
 US 49120

Contact: JOHN HUGHES
 johnh@michianarecyclinganddisposal.com
 T: (269)684-0900 X:124
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)