



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	MARGINAL

Area

[BASHFUL LOGGING]

Machine Id

JOHN DEERE 648L 1DW648LBLKF695802

Component

Diesel Engine

Fluid

{not provided} (--- GAL)**RECOMMENDATION**

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0177136	JR0177098	---
Sample Date		Client Info		29 Mar 2024	06 Dec 2023	---
Machine Age	hrs	Client Info		7907	7478	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				MARGINAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	23	3	---
Chromium	ppm	ASTM D5185m	>11	<1	0	---
Nickel	ppm	ASTM D5185m	>5	2	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	5	2	---
Lead	ppm	ASTM D5185m	>26	2	<1	---
Copper	ppm	ASTM D5185m	>26	3	<1	---
Tin	ppm	ASTM D5185m	>4	<1	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	10	7	---
Potassium	ppm	ASTM D5185m	>20	8	1	---
Fuel		WC Method	>2.1	<1.0	<1.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.6	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	10.0	6.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.1	19.4	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION


The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m	>31	3	1	---
Boron	ppm	ASTM D5185m		56	223	---
Barium	ppm	ASTM D5185m		1	0	---
Molybdenum	ppm	ASTM D5185m		235	219	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		700	770	---
Calcium	ppm	ASTM D5185m		1285	1298	---
Phosphorus	ppm	ASTM D5185m		852	861	---
Zinc	ppm	ASTM D5185m		963	1009	---
Sulfur	ppm	ASTM D5185m		2848	2935	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.0	13.4	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.9	8.6	---
Visc @ 100°C	cSt	ASTM D445		▲ 16.9	16.1	---


▲ Viscosity @ 100°C

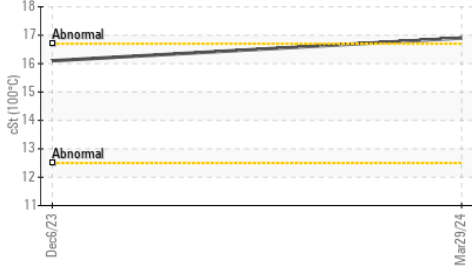


FT-IR (Direct Trend)

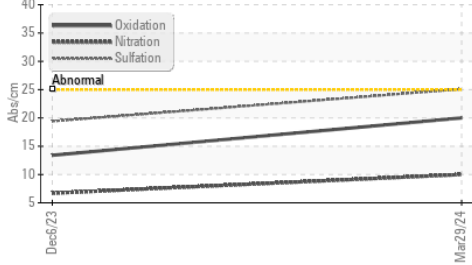


Base Number

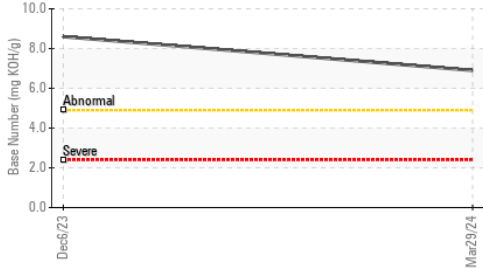


Ferrous Alloys

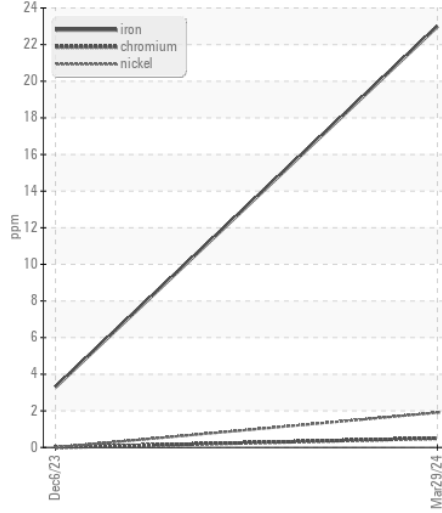


Non-ferrous Metals

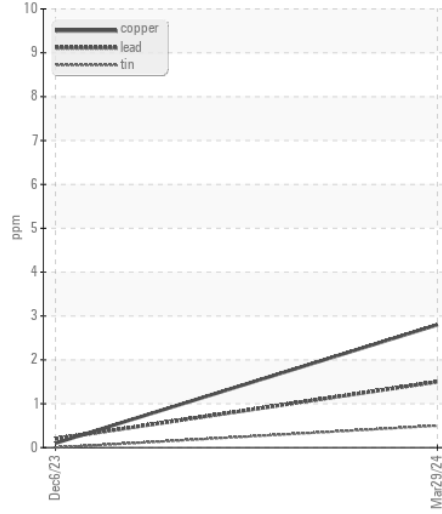

▲ Viscosity @ 100°C

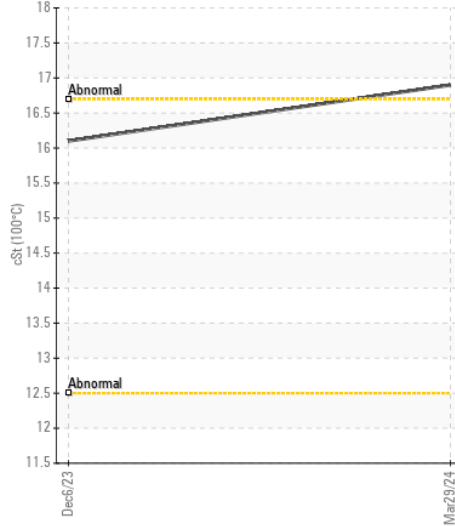

Base Number

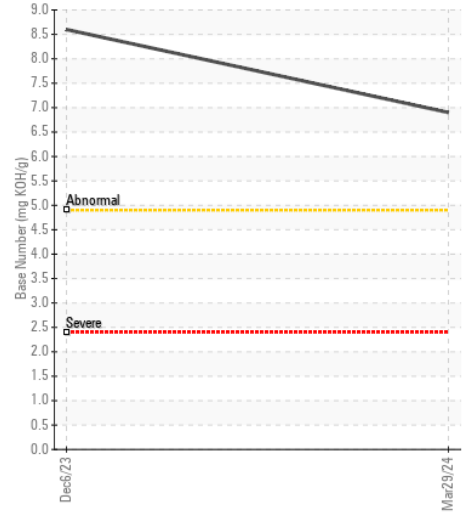

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0177136

Lab Number : 06148520

Unique Number : 10978598

Test Package : CONST (Additional Tests: TBN)

Received : 15 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 17 Apr 2024 - Jonathan Hester

JRE - MOUNT GILEAD

305 NORTH MAIN STREET

MOUNT GILEAD, NC

US 27306

Contact: TIM ELSWORTH

telsworth@jamesriverequipment.com

T: (910)439-5653

F: (910)439-4568

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)