



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Area

[701330]

Machine Id

VOLVO L120H 632860

Component

Hydraulic System

Fluid

VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP446376	VCP437445	VCP432770
Sample Date		Client Info		09 Apr 2024	15 Jan 2024	06 Sep 2023
Machine Age	hrs	Client Info		7484	6693	5768
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	3	4	7
Chromium	ppm	ASTM D5185m	>20	<1	<1	1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	<1	<1
Lead	ppm	ASTM D5185m	>20	<1	<1	<1
Copper	ppm	ASTM D5185m	>20	0	1	2
Tin	ppm	ASTM D5185m	>20	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is a moderate amount of particulates (2 to 100 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	4	4	3
Potassium	ppm	ASTM D5185m	>20	<1	1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	8740	3968	1592
Particles >6µm		ASTM D7647	>1300	2985	927	175
Particles >14µm		ASTM D7647	>160	389	38	8
Particles >21µm		ASTM D7647	>40	133	6	2
Particles >38µm		ASTM D7647	>10	10	1	0
Particles >71µm		ASTM D7647	>3	0	1	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/19/16	19/17/12	18/15/10
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Sodium	ppm	ASTM D5185m		3	3	3
Boron	ppm	ASTM D5185m	14	4	5	0
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.0	1	1	<1
Manganese	ppm	ASTM D5185m	0.0	0	<1	0
Magnesium	ppm	ASTM D5185m	2.6	17	17	2
Calcium	ppm	ASTM D5185m	49	151	145	107
Phosphorus	ppm	ASTM D5185m	354	361	362	373
Zinc	ppm	ASTM D5185m	419	424	427	445
Sulfur	ppm	ASTM D5185m	3719	2439	2124	2884
Acid Number (AN)	mg KOH/g	ASTM D8045		0.48	0.42	0.42
Visc @ 40°C	cSt	ASTM D445	46	39.3	38.9	42.1

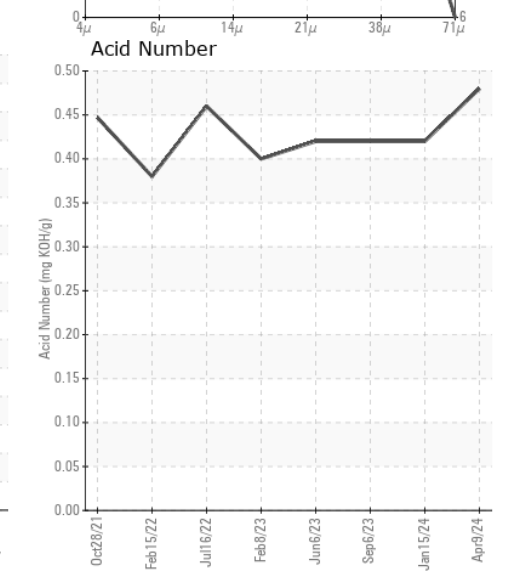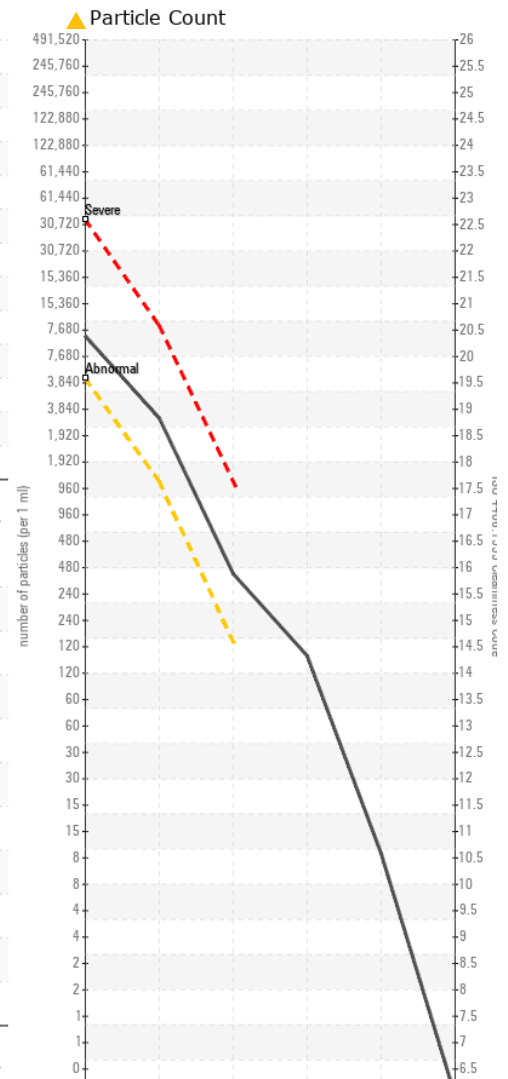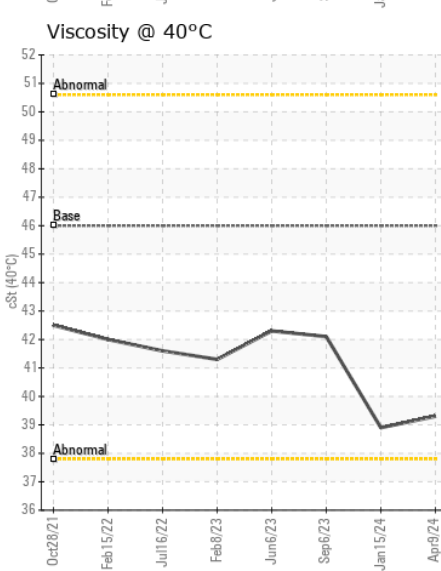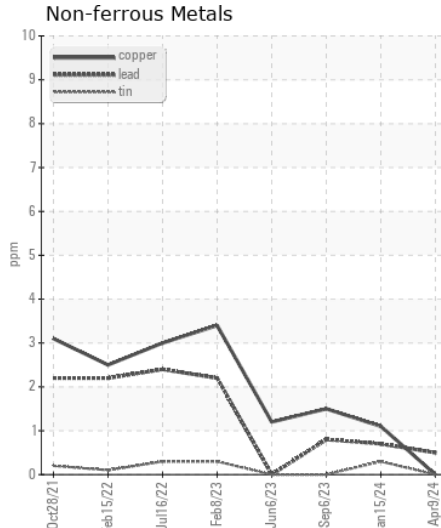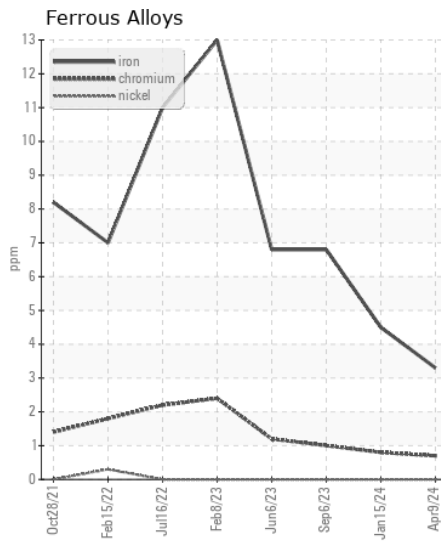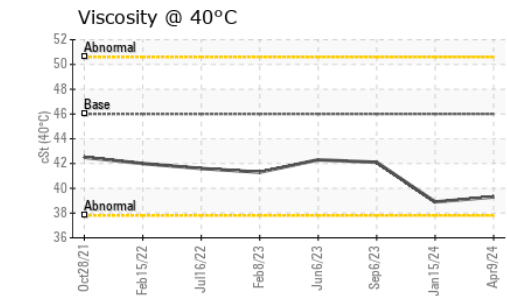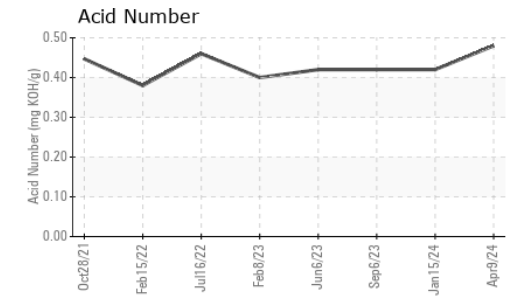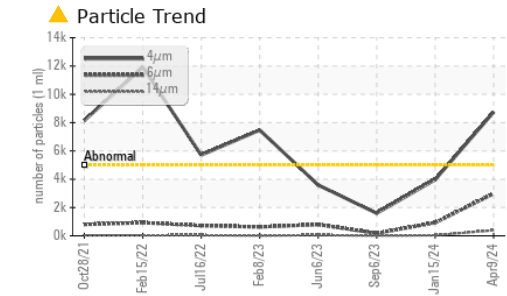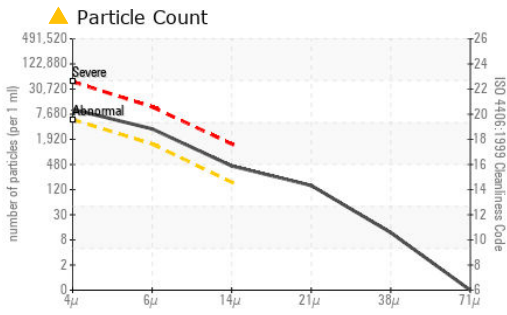

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP446376
Lab Number : 06148589
Unique Number : 10978667
Test Package : MOB 2

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 16 Apr 2024 - Wes Davis

ORANGE COUNTY SOLID WASTE
 5901 YOUNG PINE ROAD
 ORLANDO, FL
 US 32829
 Contact: MICHAEL BEEBE
 michael.beebe@ocfl.net
 T: (407)836-6652
 F: (407)836-6650

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)