



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 670P 1FF670PALPF000032**  
 Component  
**Right Swing Drive**  
 Fluid  
**JOHN DEERE GL-5 80W90 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WE0006932</b>	WE0006399	WE0005765
Sample Date		Client Info		<b>11 Apr 2024</b>	24 Jan 2024	02 Nov 2023
Machine Age	hrs	Client Info		<b>1965</b>	1485	1006
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>42</b>	13	13
Iron	ppm	ASTM D5185m	>151	<b>81</b>	4	0
Chromium	ppm	ASTM D5185m	>11	<b>1</b>	0	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>21	<b>3</b>	<1	0
Lead	ppm	ASTM D5185m	>51	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>51	<b>1</b>	0	0
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<b>13</b>	4	1
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	1	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>3</b>	0	0
Boron	ppm	ASTM D5185m		<b>47</b>	2	280
Barium	ppm	ASTM D5185m		<b>5</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>2</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>3</b>	1	2
Calcium	ppm	ASTM D5185m		<b>19</b>	11	3
Phosphorus	ppm	ASTM D5185m		<b>487</b>	320	1000
Zinc	ppm	ASTM D5185m		<b>33</b>	8	0
Sulfur	ppm	ASTM D5185m		<b>14779</b>	17090	18805
Visc @ 40°C	cSt	ASTM D445		<b>185</b>	146	144

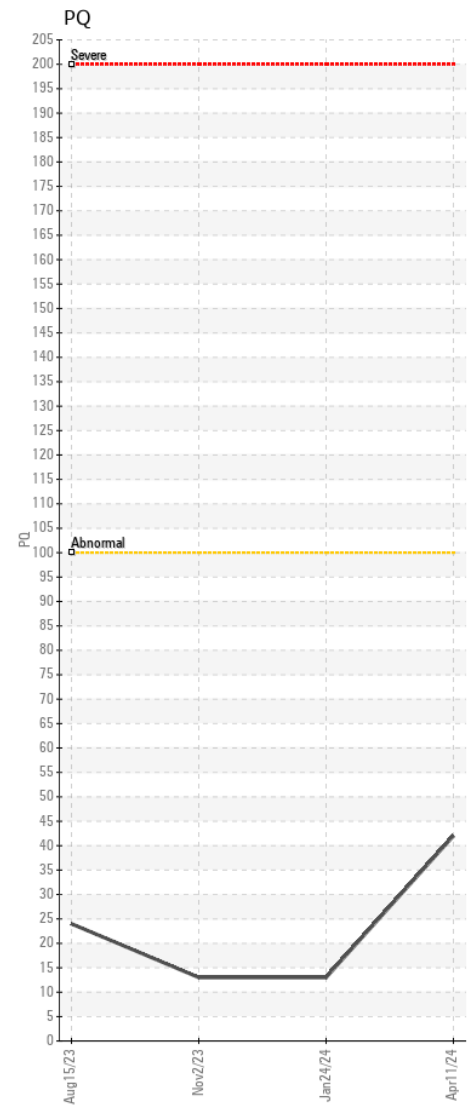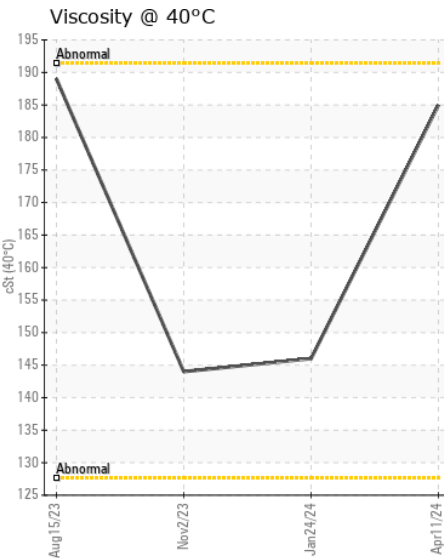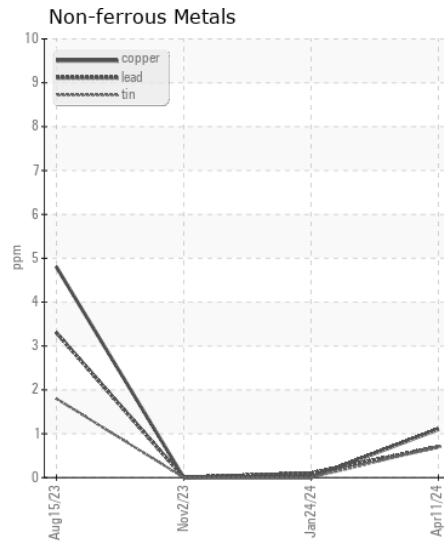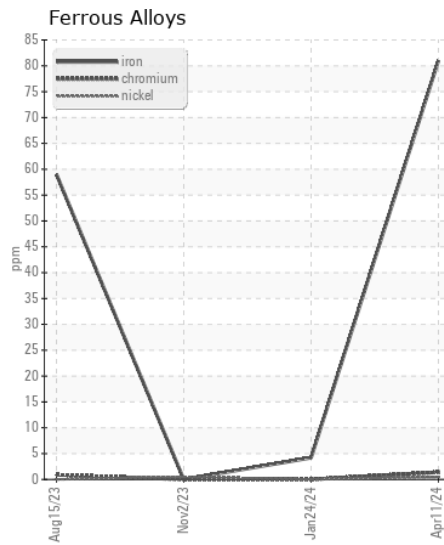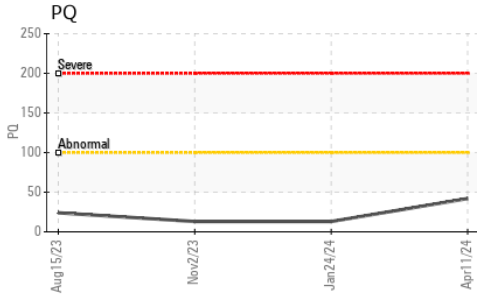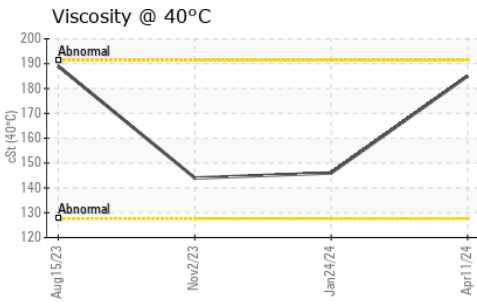

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WE0006932 **Received** : 15 Apr 2024  
**Lab Number** : 06148953 **Tested** : 16 Apr 2024  
**Unique Number** : 10979031 **Diagnosed** : 17 Apr 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT**  
P.O. BOX 412  
NORTHPORT, AL  
US 35476  
Contact: CRAIG ANDOE  
serve01@warriortractor.com  
T: (205)339-0300  
F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)