



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 650P 1T0650PAVPLX02650
 Component
Left Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0179417	---	---
Sample Date		Client Info		11 Apr 2024	---	---
Machine Age	hrs	Client Info		940	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	48	---	---
Iron	ppm	ASTM D5185m	>750	67	---	---
Chromium	ppm	ASTM D5185m	>9	2	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	3	---	---
Lead	ppm	ASTM D5185m	>15	<1	---	---
Copper	ppm	ASTM D5185m	>40	1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	10	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	4	---	---
Boron	ppm	ASTM D5185m	6	2	---	---
Barium	ppm	ASTM D5185m	0	5	---	---
Molybdenum	ppm	ASTM D5185m	0	1	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m	145	103	---	---
Calcium	ppm	ASTM D5185m	3570	3490	---	---
Phosphorus	ppm	ASTM D5185m	1290	1009	---	---
Zinc	ppm	ASTM D5185m	1640	1217	---	---
Sulfur	ppm	ASTM D5185m		3573	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	52.6	---	---

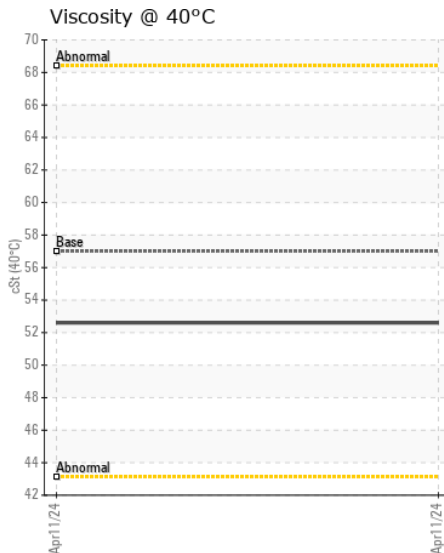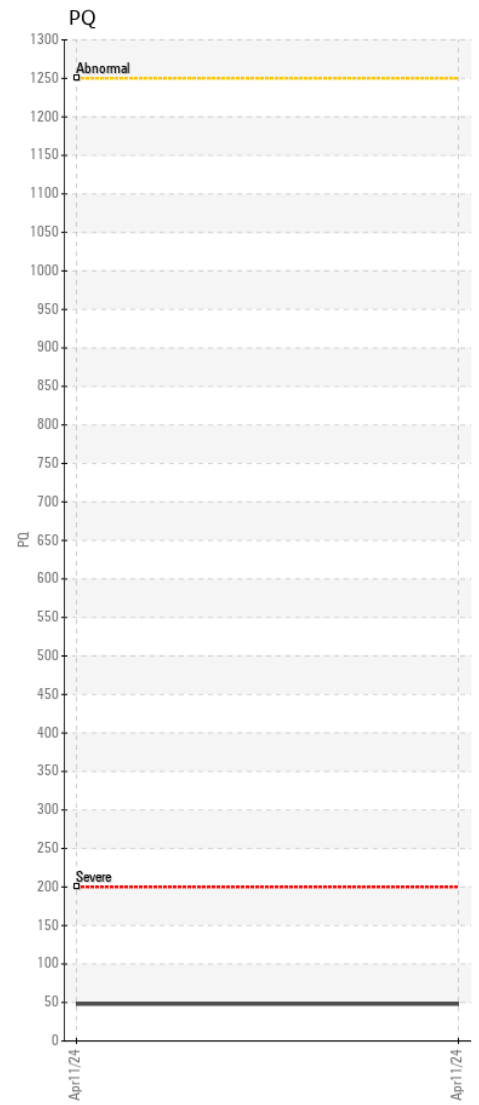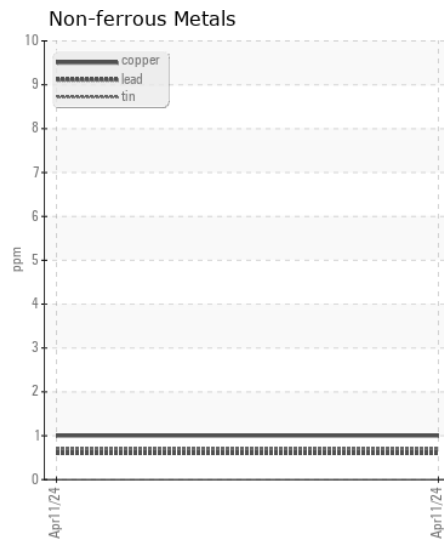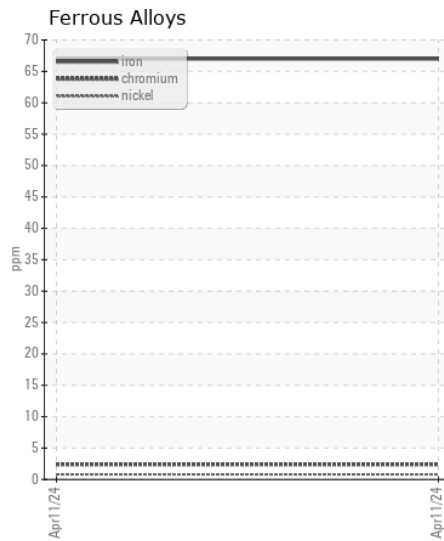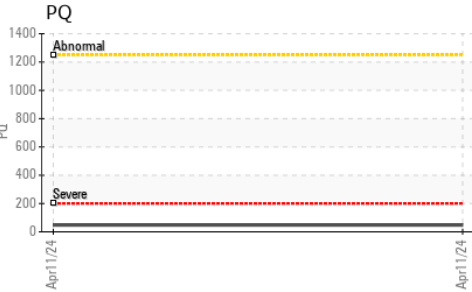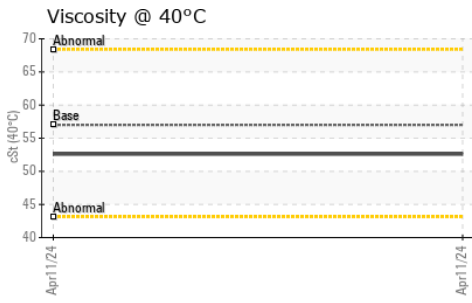

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0179417 **Received** : 15 Apr 2024
Lab Number : 06148959 **Tested** : 16 Apr 2024
Unique Number : 10979037 **Diagnosed** : 16 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)