



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR AP555F AP-12 DRAG
Component
Left Conveyor
Fluid
GEAR OIL SAE 80W90 (2 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0034922	DCM1044686	---
Sample Date		Client Info		25 Mar 2024	28 Mar 2019	---
Machine Age	hrs	Client Info		2178	1136	---
Oil Age	hrs	Client Info		300	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	20	35	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m		3	<1	---
Lead	ppm	ASTM D5185m		<1	0	---
Copper	ppm	ASTM D5185m		<1	<1	---
Tin	ppm	ASTM D5185m		<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		9	2	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	4	5	---
Boron	ppm	ASTM D5185m	400	227	21	---
Barium	ppm	ASTM D5185m	200	1	0	---
Molybdenum	ppm	ASTM D5185m	12	<1	0	---
Manganese	ppm	ASTM D5185m		1	2	---
Magnesium	ppm	ASTM D5185m	12	4	1	---
Calcium	ppm	ASTM D5185m	150	70	145	---
Phosphorus	ppm	ASTM D5185m	1650	1338	412	---
Zinc	ppm	ASTM D5185m	125	47	85	---
Sulfur	ppm	ASTM D5185m	22500	26088	18082	---
Visc @ 40°C	cSt	ASTM D445	143	234	145.5	---

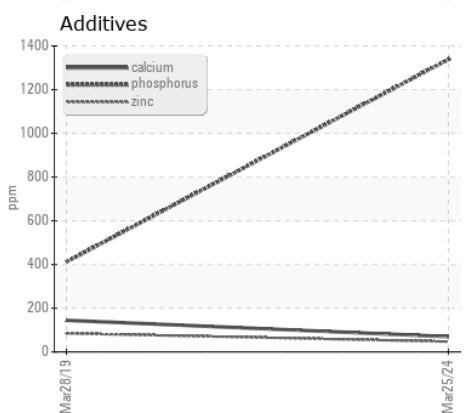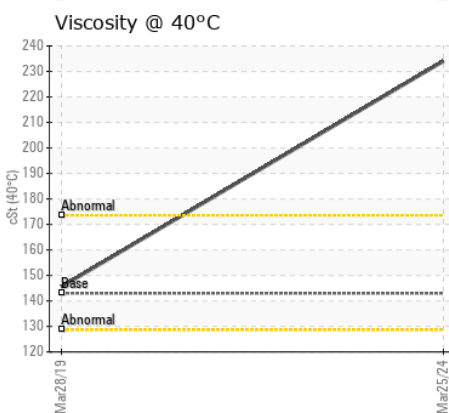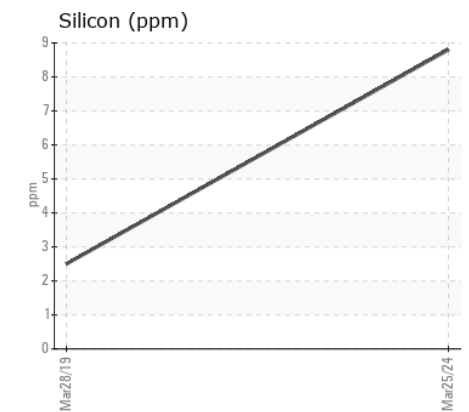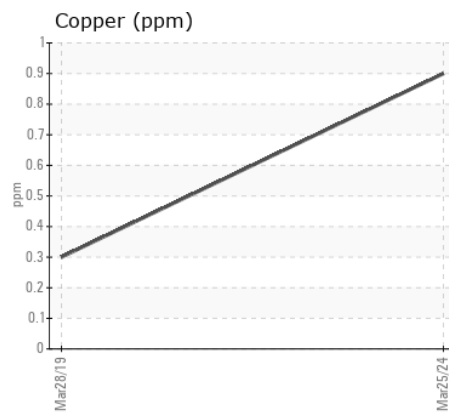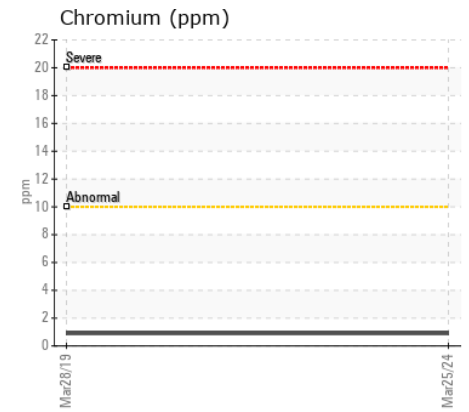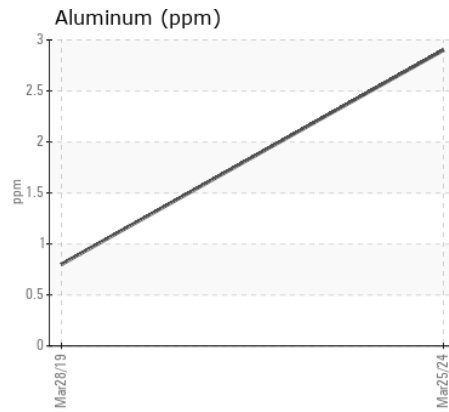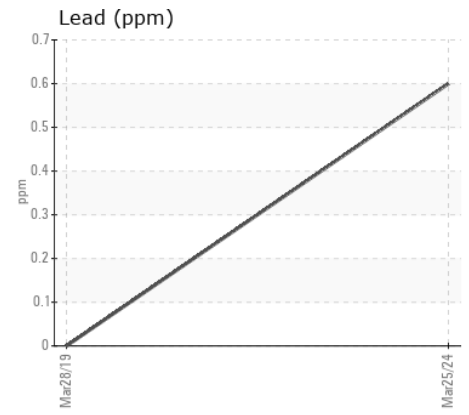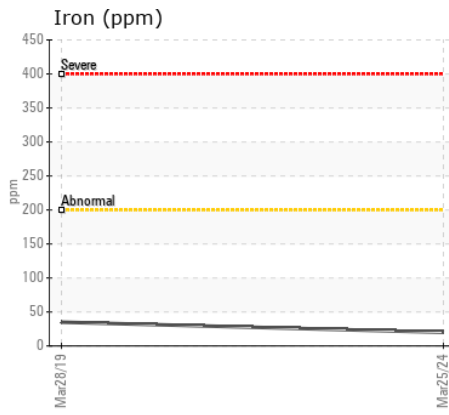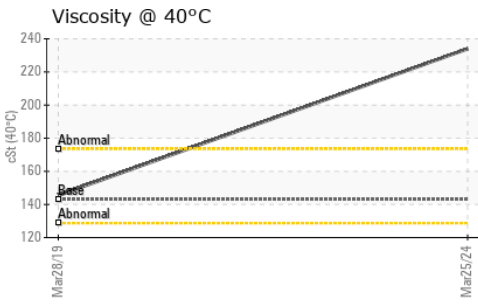

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : DC0034922

Lab Number : 06149022

Unique Number : 10979100

Test Package : MOB 1

Received : 15 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 17 Apr 2024 - Sean Felton

ROSS CONTRACTING INC.

1007 RISING RIDGE ROAD

MOUNT AIRY, MD

US 21771

Contact: JONATHAN KUENTZ

jonathank@rosscontracting.com

T: (301)831-5500

F: (301)831-5900

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)