



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[68978]
 Machine Id
OHT101
 Component
Front Differential
 Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: PM-1 sampled fluid)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0109336	PCA0084715	PCA0062491
Sample Date		Client Info		04 Apr 2024	19 Oct 2023	05 Apr 2022
Machine Age	hrs	Client Info		17749	17273	16935
Oil Age	hrs	Client Info		17749	17273	16717
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	61	103	95
Chromium	ppm	ASTM D5185m	>3	1	<1	<1
Nickel	ppm	ASTM D5185m	>3	<1	<1	0
Titanium	ppm	ASTM D5185m	>2	<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	4	<1	1
Lead	ppm	ASTM D5185m	>13	<1	0	<1
Copper	ppm	ASTM D5185m	>103	22	36	36
Tin	ppm	ASTM D5185m	>5	2	2	2
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	23	12	4
Potassium	ppm	ASTM D5185m	>20	2	1	<1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	2	0
Boron	ppm	ASTM D5185m	2	16	79	96
Barium	ppm	ASTM D5185m	0	1	20	0
Molybdenum	ppm	ASTM D5185m	0	9	26	29
Manganese	ppm	ASTM D5185m	0	1	1	1
Magnesium	ppm	ASTM D5185m	9	18	12	10
Calcium	ppm	ASTM D5185m	3114	3552	1134	229
Phosphorus	ppm	ASTM D5185m	1099	997	973	956
Zinc	ppm	ASTM D5185m	1245	1150	434	140
Sulfur	ppm	ASTM D5185m	7086	5572	24577	19207
Visc @ 40°C	cSt	ASTM D445	213.9	192	141	127

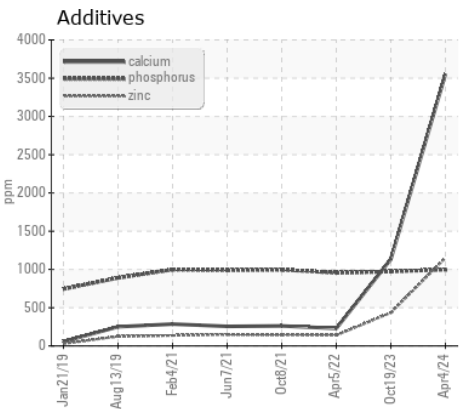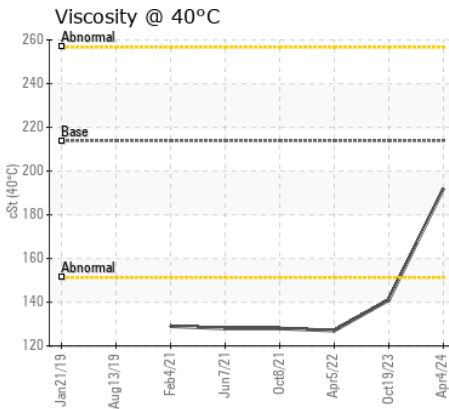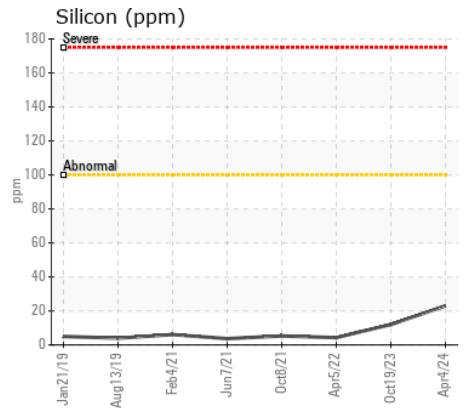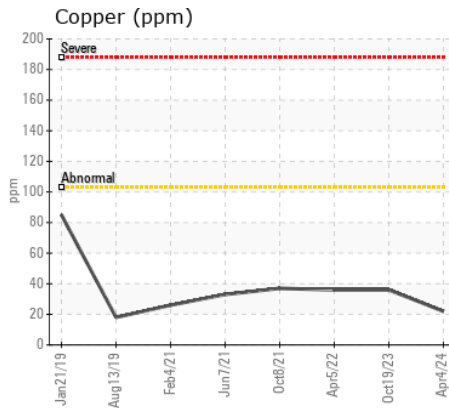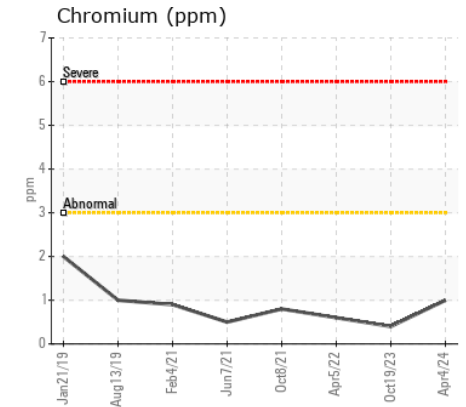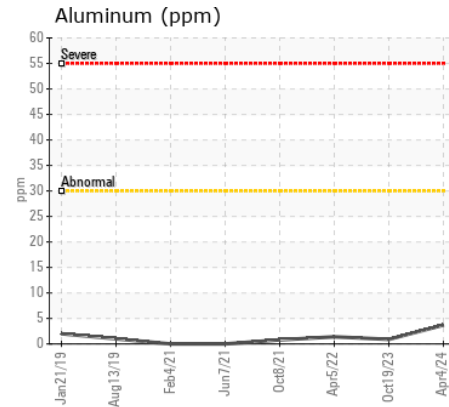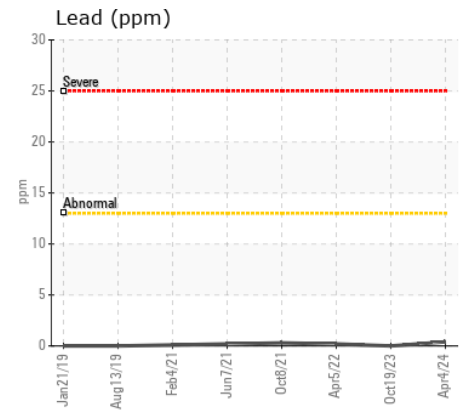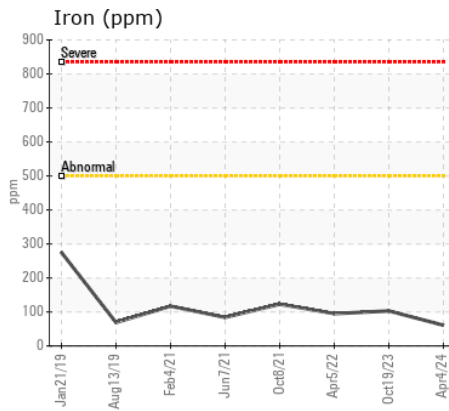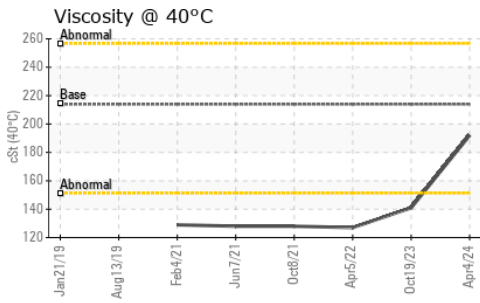

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : PCA0109336
 Lab Number : 06149070
 Unique Number : 10979148
 Test Package : MOB 1

Received : 15 Apr 2024
 Tested : 16 Apr 2024
 Diagnosed : 17 Apr 2024 - Sean Felton

Kemp Quarries - Muskogee Sand
 3395 W 50th St N
 Porter, OK
 US 74454

Contact: muskogee@muskogeessand.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: