



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A30G 752484
Component
Rear Axle
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0004298	VCP360015	---
Sample Date		Client Info		11 Apr 2024	03 Jun 2022	---
Machine Age	hrs	Client Info		2465	1126	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		None	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	260	192	---
Chromium	ppm	ASTM D5185m	>20	4	4	---
Nickel	ppm	ASTM D5185m	>10	3	1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>30	6	<1	---
Lead	ppm	ASTM D5185m	>50	<1	<1	---
Copper	ppm	ASTM D5185m	>150	19	10	---
Tin	ppm	ASTM D5185m	>20	1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	24	3	---
Potassium	ppm	ASTM D5185m	>20	3	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	<1	---
Boron	ppm	ASTM D5185m	111	247	325	---
Barium	ppm	ASTM D5185m	0.0	2	3	---
Molybdenum	ppm	ASTM D5185m	0.9	6	9	---
Manganese	ppm	ASTM D5185m	0.0	5	6	---
Magnesium	ppm	ASTM D5185m	39	14	15	---
Calcium	ppm	ASTM D5185m	93	270	354	---
Phosphorus	ppm	ASTM D5185m	920	2234	1972	---
Zinc	ppm	ASTM D5185m	104	130	194	---
Sulfur	ppm	ASTM D5185m	20179	27510	23653	---
Visc @ 40°C	cSt	ASTM D445	333	53.0	57.9	---

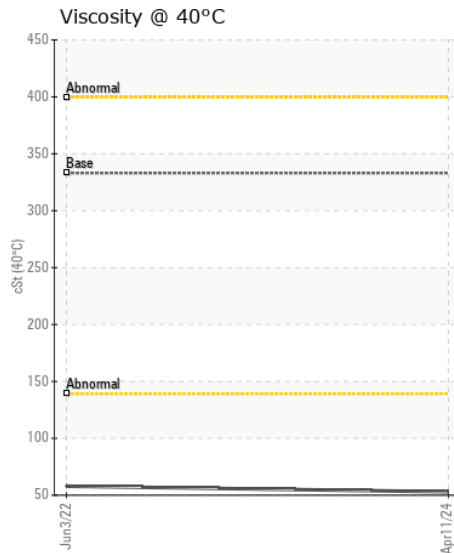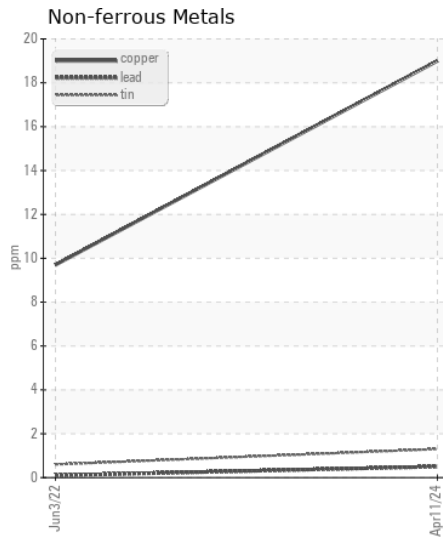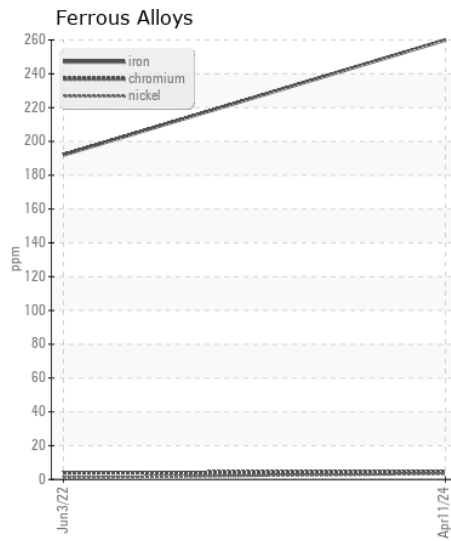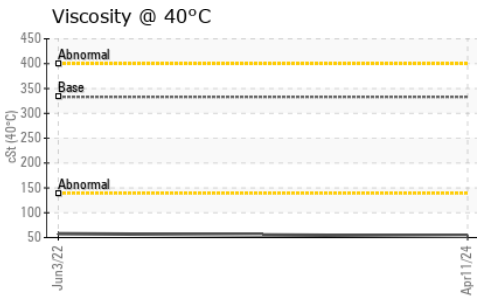

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0004298
Lab Number : 06149074
Unique Number : 10979152
Test Package : CONST

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 17 Apr 2024 - Sean Felton

520 - ASCENDUM MACHINERY INC - KNOXVILLE
 5730 RUTLEDGE PIKE
 KNOXVILLE, TN
 US 37924

Contact: BRANDON GRANT
 brandon.grant@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (865)525-1845
 F: (865)525-0251