



WEAR

NORMAL

CONTAMINATION

NORMAL

FLUID CONDITION

ATTENTION



Area
KEMP QUARRIES / PRYOR STONE [68779]
Machine Id
OHT110
Component
Rear Left Final Drive
Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Pm4 performed. All oil samples taken. All oils, and all filters changed.)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0086624	PCA0086251	PCA0084255
Sample Date		Client Info		29 Mar 2024	26 Oct 2023	25 Aug 2023
Machine Age	hrs	Client Info		29240	28435	28083
Oil Age	hrs	Client Info		2145	1340	988
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Oil Added	Oil Added
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	24	38	33
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m	>15	<1	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	3	<1	<1
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>75	2	<1	1
Tin	ppm	ASTM D5185m	>8	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	8	17	19
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		1	3	3
Boron	ppm	ASTM D5185m	2	0	0	0
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	<1
Manganese	ppm	ASTM D5185m	0	<1	0	<1
Magnesium	ppm	ASTM D5185m	9	7	15	15
Calcium	ppm	ASTM D5185m	3114	1290	3147	3345
Phosphorus	ppm	ASTM D5185m	1099	589	984	973
Zinc	ppm	ASTM D5185m	1245	753	1212	1207
Sulfur	ppm	ASTM D5185m	7086	2102	3917	4517
Visc @ 40°C	cSt	ASTM D445	213.9	88.0	168	173

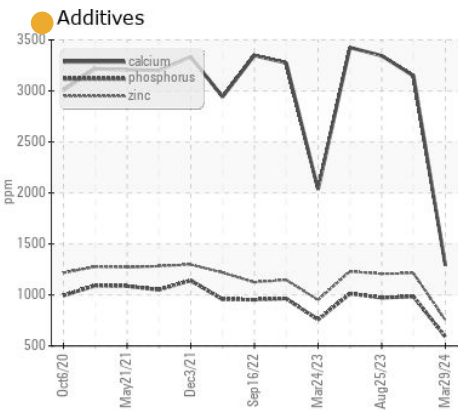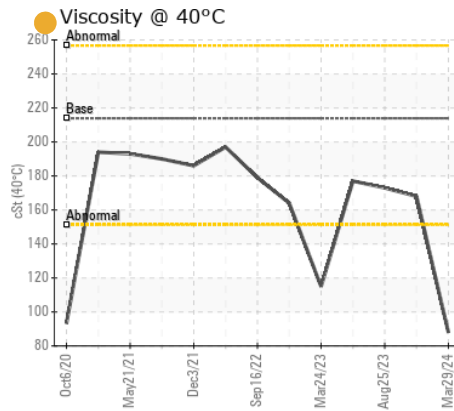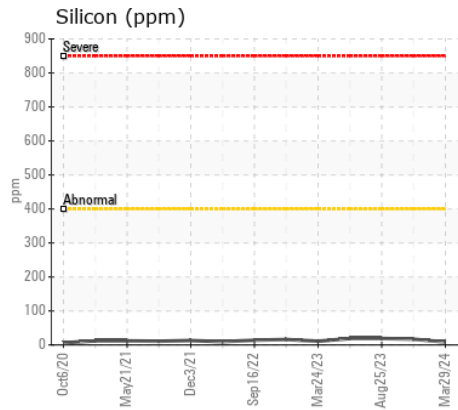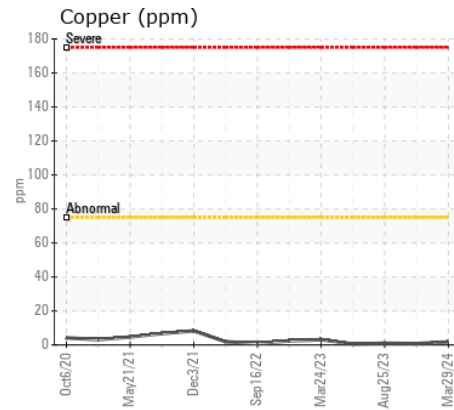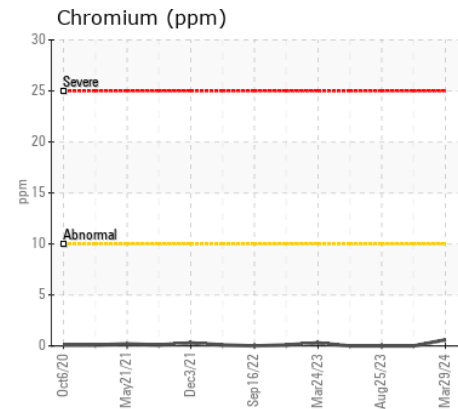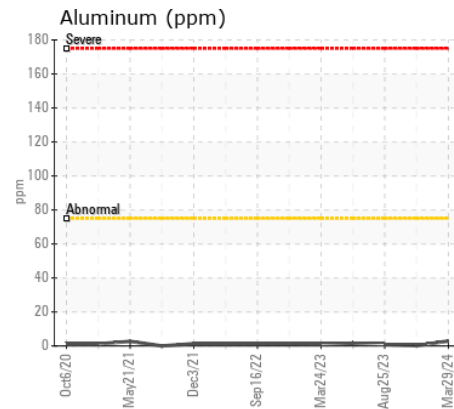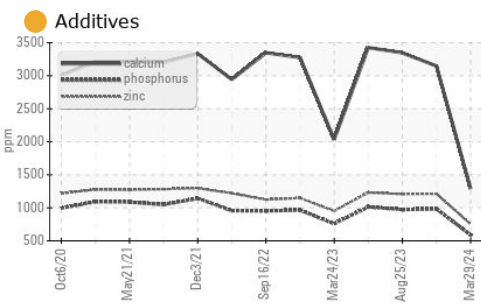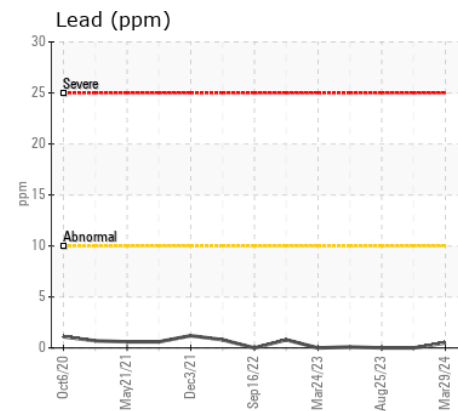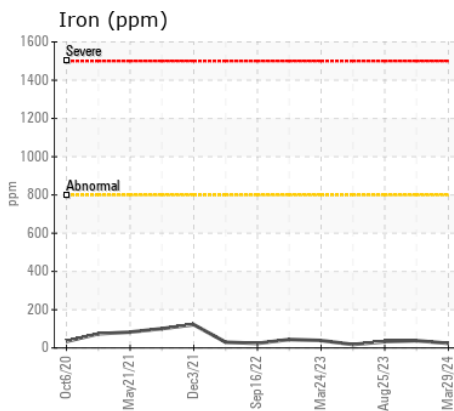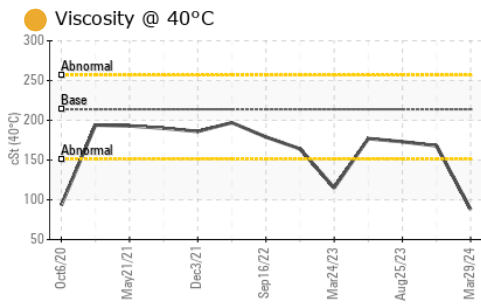

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : PCA0086624
 Lab Number : 06149093
 Unique Number : 10979171
 Test Package : MOB 1
 Received : 15 Apr 2024
 Tested : 16 Apr 2024
 Diagnosed : 17 Apr 2024 - Sean Felton

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:
 pryor@pryorstone.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)