



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
C0020A - EAST BRIDGE
 Component
Gearbox
 Fluid
GEAR OIL SAE 80W140 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.











CONTAMINATION

Elemental level of silicon (Si) above normal indicating ingress of seal material.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0033218	---	---
Sample Date		Client Info		19 Mar 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m	>200	58	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	4	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>200	5	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>50	▲ 62	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m	400	7	---	---
Barium	ppm	ASTM D5185m	200	6	---	---
Molybdenum	ppm	ASTM D5185m	12	1	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	12	4	---	---
Calcium	ppm	ASTM D5185m	150	220	---	---
Phosphorus	ppm	ASTM D5185m	1650	506	---	---
Zinc	ppm	ASTM D5185m	125	102	---	---
Sulfur	ppm	ASTM D5185m	22500	21206	---	---
Visc @ 40°C	cSt	ASTM D445	263	265	---	---

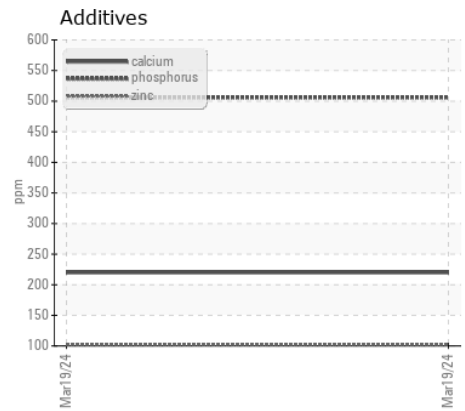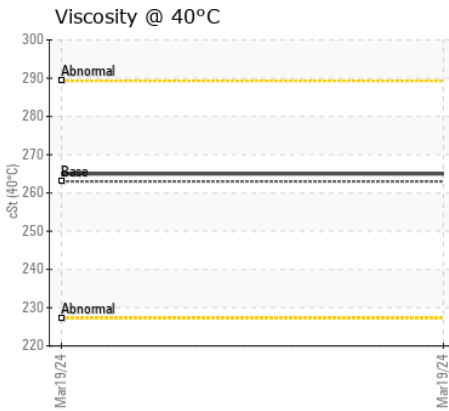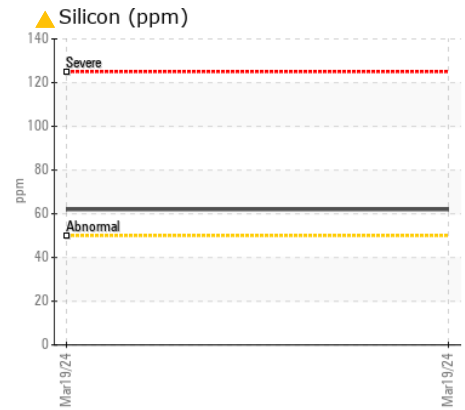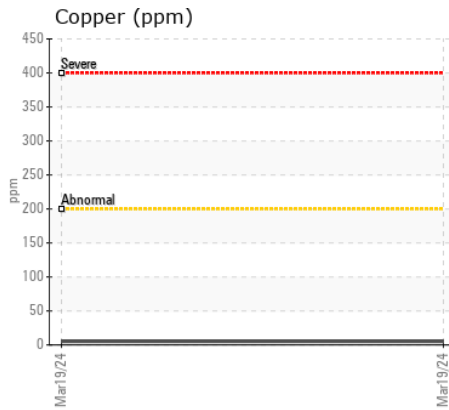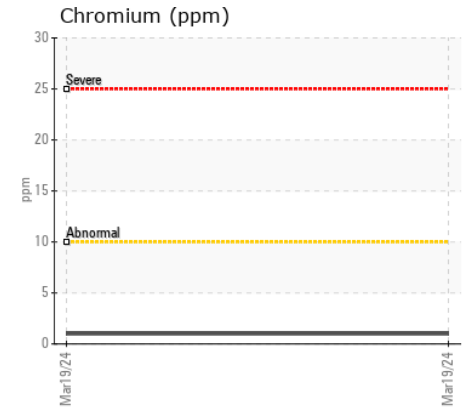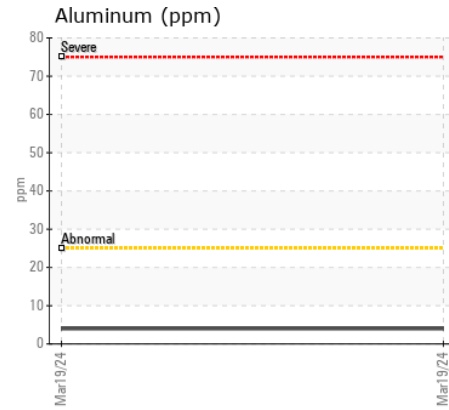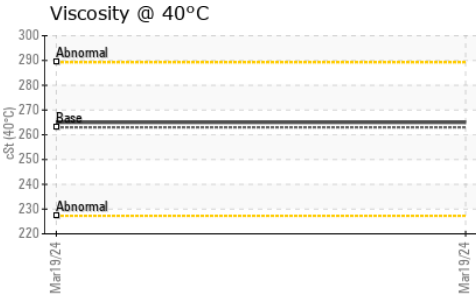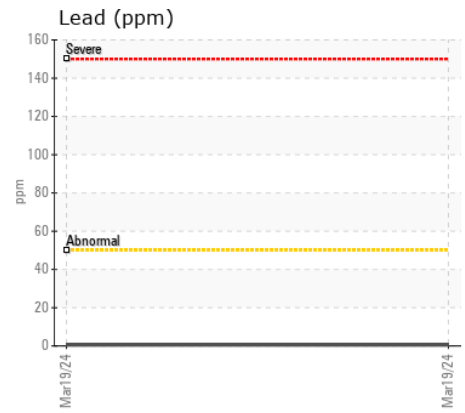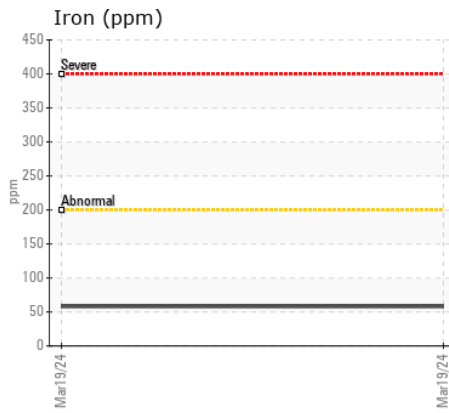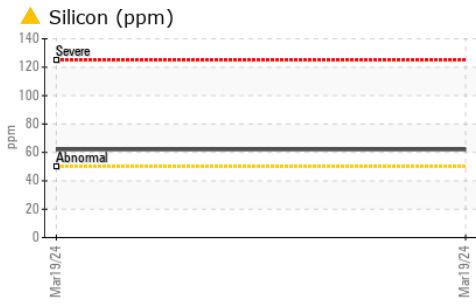

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0033218
Lab Number : 06149105
Unique Number : 10979183
Test Package : MOB 1

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 17 Apr 2024 - Sean Felton

CRANWORKS INC - MID-ATLANTIC
 11089 LEADBETTER ROAD
 ASHLAND, VA
 US 23005
 Contact: JASON WILDE
 jcwilde@vacranetworks.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: