



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CR1227
Component
1 Swing Drive
Fluid
GEAR OIL ISO 220 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0892947	WC0746690	---
Sample Date		Client Info		08 Apr 2024	07 Oct 2022	---
Machine Age	hrs	Client Info		1994	678	---
Oil Age	hrs	Client Info		1000	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		Changed	Not Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>400	6	14	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	3	1	---
Lead	ppm	ASTM D5185m	>50	<1	<1	---
Copper	ppm	ASTM D5185m	>200	2	<1	---
Tin	ppm	ASTM D5185m	>10	<1	2	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	3	2	---
Potassium	ppm	ASTM D5185m	>20	1	4	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	5	---
Boron	ppm	ASTM D5185m	50	3	0	---
Barium	ppm	ASTM D5185m	15	1	0	---
Molybdenum	ppm	ASTM D5185m	15	<1	0	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m	50	2	0	---
Calcium	ppm	ASTM D5185m	50	95	0	---
Phosphorus	ppm	ASTM D5185m	350	366	43	---
Zinc	ppm	ASTM D5185m	100	33	0	---
Sulfur	ppm	ASTM D5185m	12500	4952	2478	---
Visc @ 40°C	cSt	ASTM D445	220	218	239	---

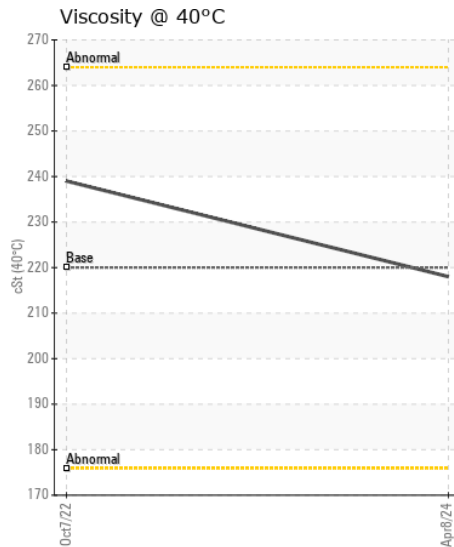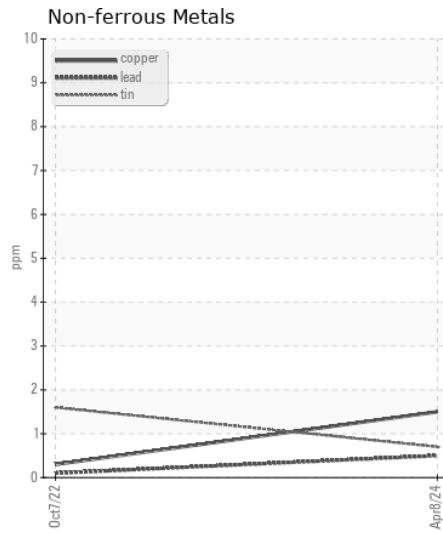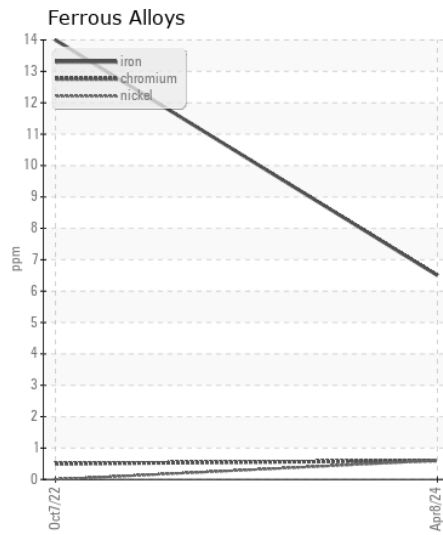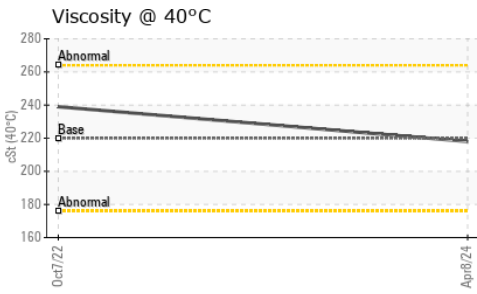

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0892947

Lab Number : 06149121

Unique Number : 10979199

Test Package : CONST

Received : 15 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 17 Apr 2024 - Sean Felton

BUCKNER HEAVY LIFT

4732 NC 54 EAST

GRAHAM, NC

US 27253-9215

Contact: MICHAEL LAWSON

michaell@bucknercompanies.com

T: (336)376-8888

F: (336)376-4090

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)