



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

Ascendum Machinery

Machine Id

SENNEBOGEN 821E RTH5 (S/N 82102699)

Component

Rear Left Travel

Fluid

VOLVO SUPER GEAR OIL 75W-80-GO102 (1 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0007112	ASC0000497	VCP0006696
Sample Date		Client Info		10 Apr 2024	09 Aug 2023	12 Apr 2023
Machine Age	hrs	Client Info		5663	5133	4027
Oil Age	hrs	Client Info		4027	1106	4027
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	19	5	5
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>100	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	1	0	0
Copper	ppm	ASTM D5185m	>60	20	8	5
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>150	4	4	6
Potassium	ppm	ASTM D5185m	>20	2	<1	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		20	8	6
Boron	ppm	ASTM D5185m		115	238	259
Barium	ppm	ASTM D5185m		3	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		8	3	4
Calcium	ppm	ASTM D5185m		3343	1036	1249
Phosphorus	ppm	ASTM D5185m		1158	1912	2081
Zinc	ppm	ASTM D5185m		1412	519	560
Sulfur	ppm	ASTM D5185m		4944	21839	16456
Visc @ 40°C	cSt	ASTM D445		55.6	54.4	55.9

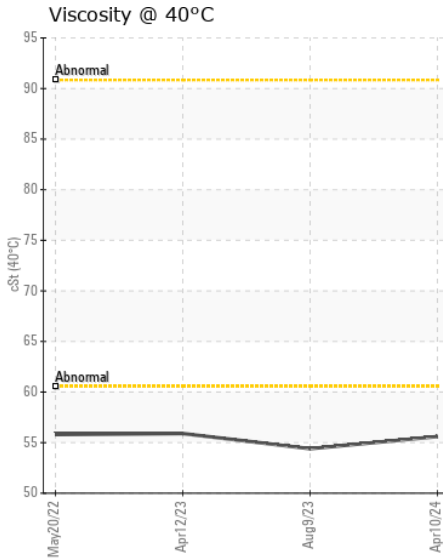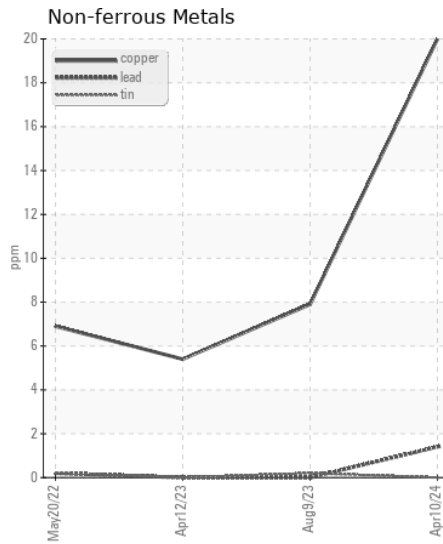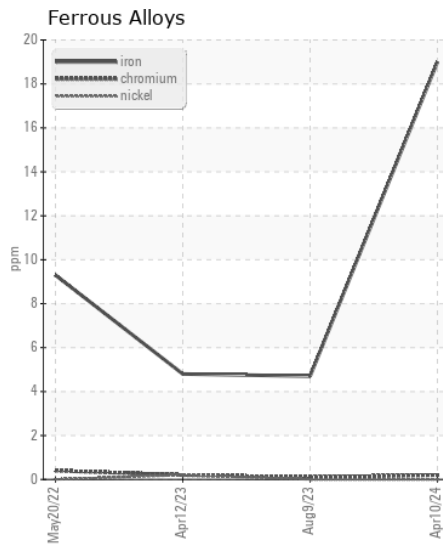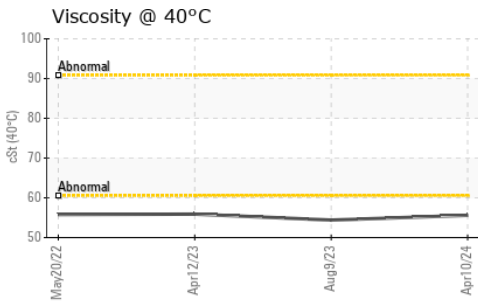

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0007112

Lab Number : 06149158

Unique Number : 10979236

Test Package : CONST

Received : 15 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 17 Apr 2024 - Sean Felton

HILCO TRANSPORT

7700 KENMONT RD

GREENSBORO, NC

US 27409

Contact: MIKE LAUGHEAD

mlaughead@hilcotransport.com

T: (336)273-9441

F: (336)273-9701

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)