



ASCENDUM

OIL ANALYSIS REPORT



Area
Ascendum Machinery
 Machine Id
VOLVO L90H 626964
 Component
Transmission (Auto)
 Fluid
VOLVO AT 102 (--- GAL)

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0007083	---	---
Sample Date		Client Info		10 Apr 2024	---	---
Machine Age	hrs	Client Info		433	---	---
Oil Age	hrs	Client Info		433	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	45	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>50	0	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>225	3	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	7	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	187	69	---	---
Barium	ppm	ASTM D5185m	0.0	2	---	---
Molybdenum	ppm	ASTM D5185m	0.0	0	---	---
Manganese	ppm	ASTM D5185m	0.0	5	---	---
Magnesium	ppm	ASTM D5185m	6.8	4	---	---
Calcium	ppm	ASTM D5185m	215	88	---	---
Phosphorus	ppm	ASTM D5185m	445	167	---	---
Zinc	ppm	ASTM D5185m	56	30	---	---
Sulfur	ppm	ASTM D5185m	1336	1667	---	---
Visc @ 40°C	cSt	ASTM D445	35.3	28.5	---	---

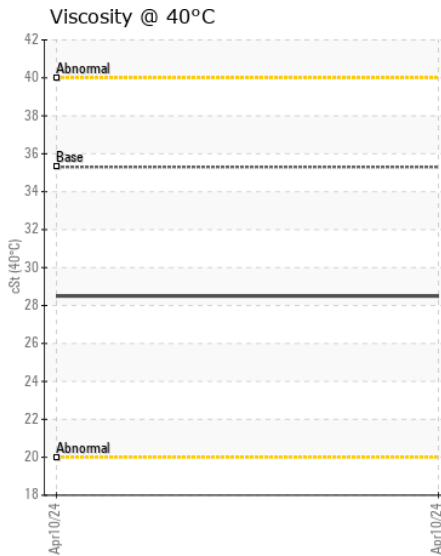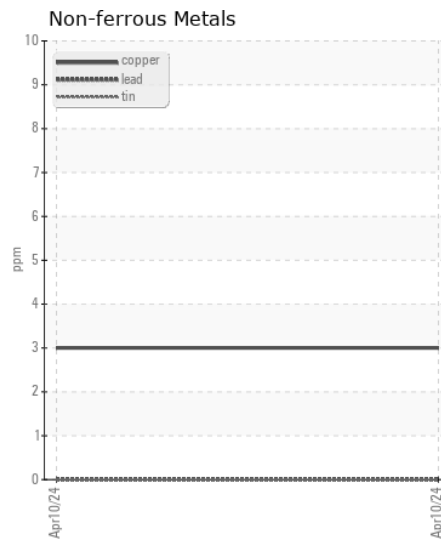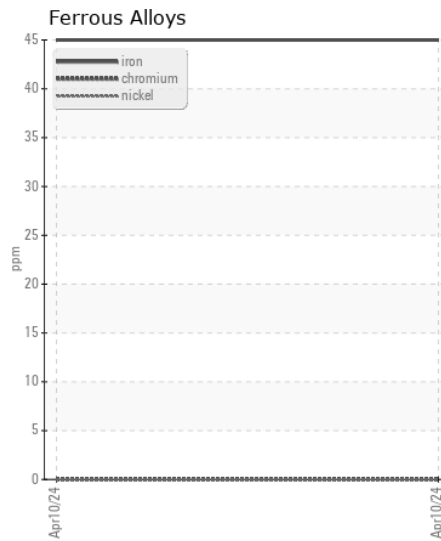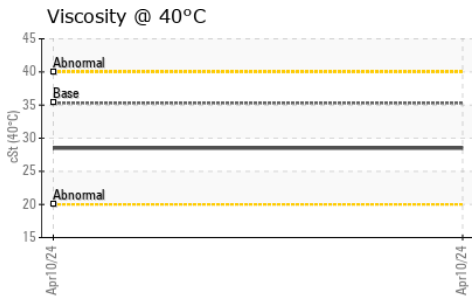

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0007083
Lab Number : 06149177
Unique Number : 10979255
Test Package : CONST

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 16 Apr 2024 - Wes Davis

IAA - INSURANCE AUTO AUCTIONS - OAK BROOK
 701 HARGER RD, SUITE 201
 OAK BROOK, IL
 US 60523
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: