



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH T300 117508 (S/N 2NKMLZ9X67M210241)

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR06149279	---	---
Sample Date		Client Info		14 Apr 2024	---	---
Machine Age	mls	Client Info		9300	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>90	6	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	<1	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	<1	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	---	---
Potassium	ppm	ASTM D5185m	>20	8	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>6	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	2	---	---
Boron	ppm	ASTM D5185m	250	221	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	5	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	450	37	---	---
Calcium	ppm	ASTM D5185m	3000	2324	---	---
Phosphorus	ppm	ASTM D5185m	1150	1101	---	---
Zinc	ppm	ASTM D5185m	1350	1253	---	---
Sulfur	ppm	ASTM D5185m	4250	4411	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.3	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	14.4	---	---

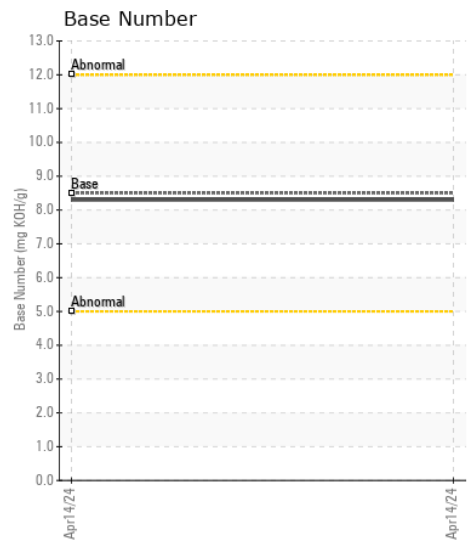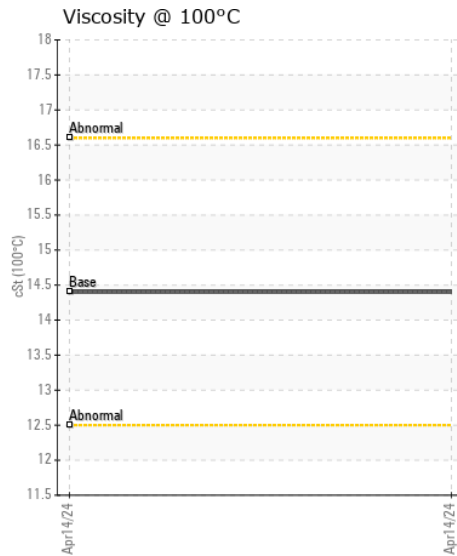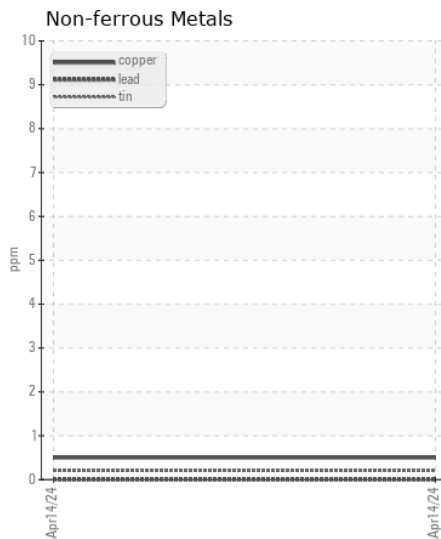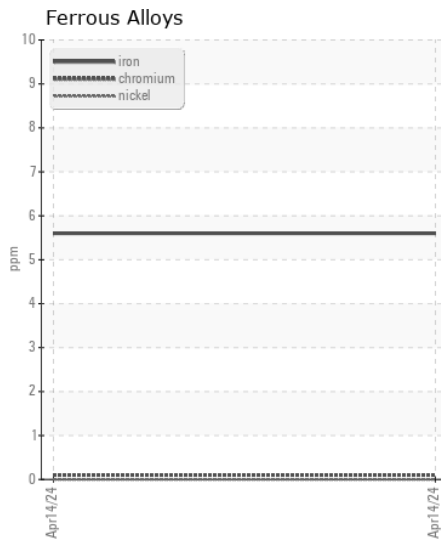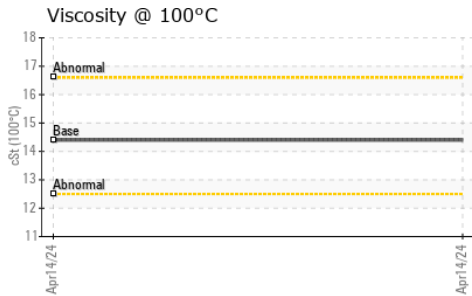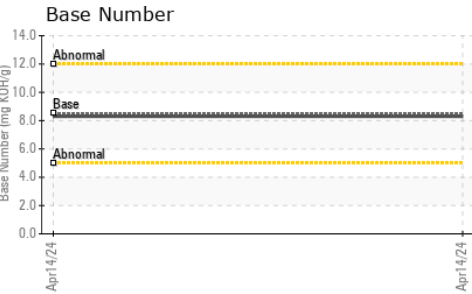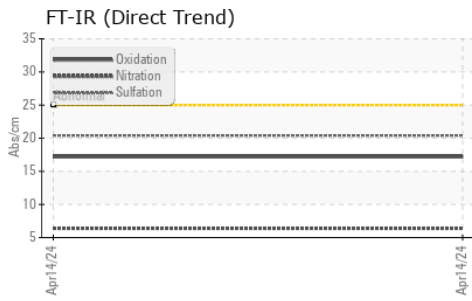

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR06149279 **Received** : 15 Apr 2024
Lab Number : 06149279 **Tested** : 16 Apr 2024
Unique Number : 10979357 **Diagnosed** : 16 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

VIRGINIA DEPARTMENT OF FORESTRY
 900 NATURAL RESOURCES DR
 CHARLOTTESVILLE, VA
 US 22903
 Contact: DONALD MULLINS
 donald.mullins@dof.virginia.gov
 T: (434)220-9023
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)