



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**KEMP QUARRIES / PRYOR STONE [70116]**

Machine Id  
**WP047**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. ( Customer Sample Comment: PM performed. Engine oil sample taken. Engine oil, and all filters changed. )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0086645</b>	PCA0086287	PCA0086270
Sample Date		Client Info		<b>05 Apr 2024</b>	01 Mar 2024	29 Jan 2024
Machine Age	hrs	Client Info		<b>1697</b>	1338	970
Oil Age	hrs	Client Info		<b>359</b>	368	344
Filter Age	hrs	Client Info		<b>359</b>	368	344
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>11</b>	19	11
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>4</b>	5	2
Copper	ppm	ASTM D5185m	>330	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>3</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.0</b>	7.4	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.8</b>	18.5	18.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	3	1
Boron	ppm	ASTM D5185m	0	<b>2</b>	<1	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>63</b>	66	61
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>1093</b>	1088	983
Calcium	ppm	ASTM D5185m	1070	<b>1157</b>	1192	1051
Phosphorus	ppm	ASTM D5185m	1150	<b>1147</b>	1148	1082
Zinc	ppm	ASTM D5185m	1270	<b>1380</b>	1362	1313
Sulfur	ppm	ASTM D5185m	2060	<b>3759</b>	3516	3211
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.4</b>	15.6	14.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.9</b>	8.9	8.9
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.6</b>	14.4	14.3

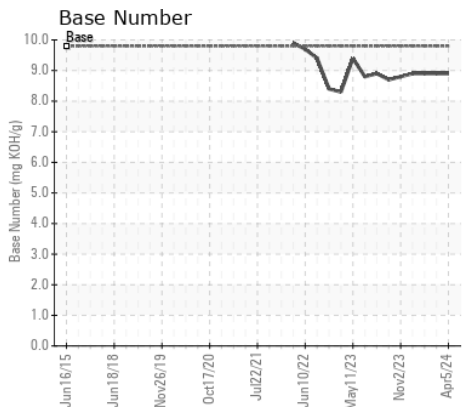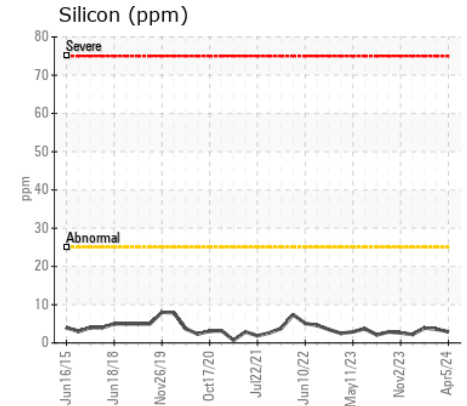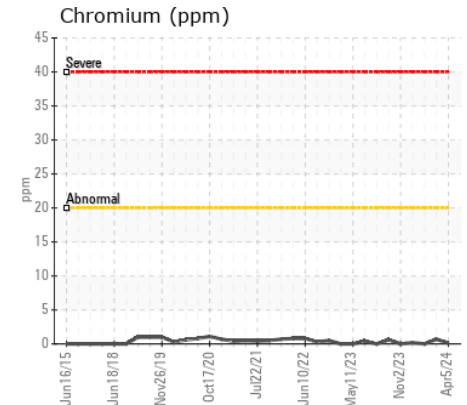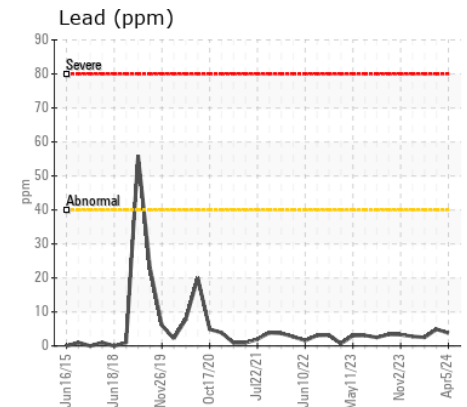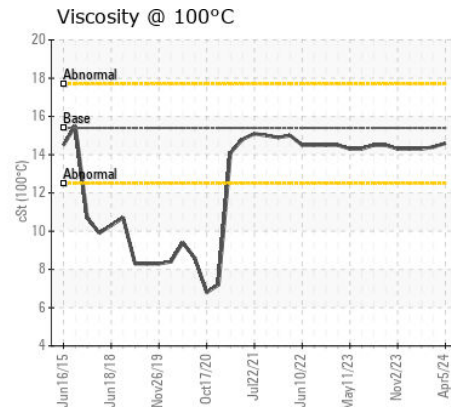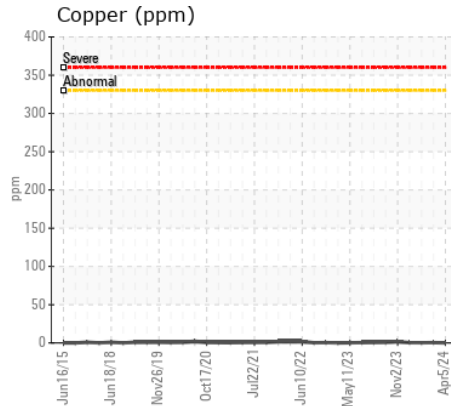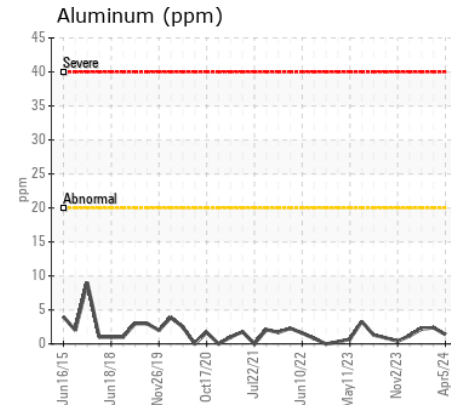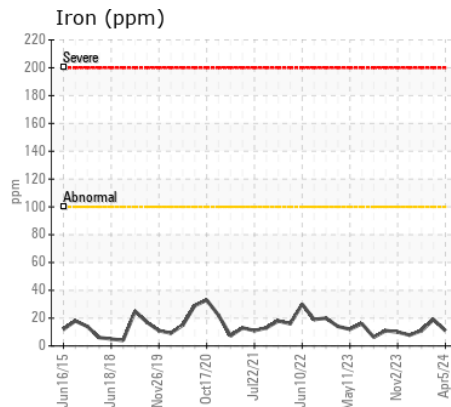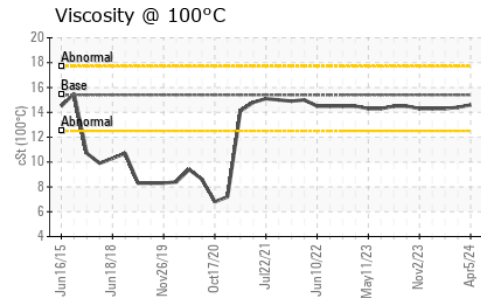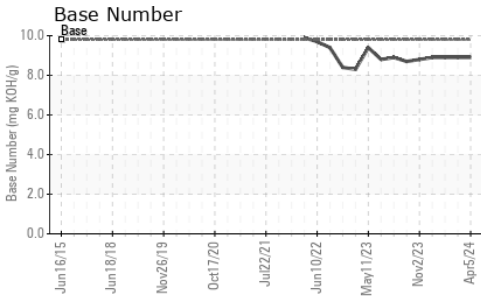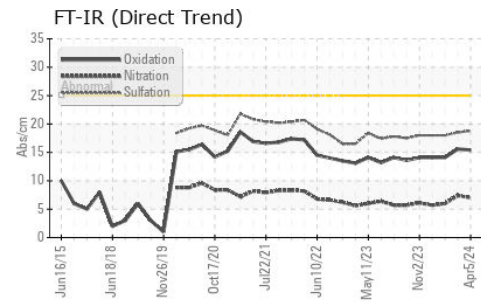

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0086645 **Received** : 15 Apr 2024  
**Lab Number** : 06149296 **Tested** : 16 Apr 2024  
**Unique Number** : 10979374 **Diagnosed** : 17 Apr 2024 - Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Kemp Quarries - Pryor Stone - Pryor**  
 1050 E 520 Rd  
 Pryor, OK  
 US 74361  
 Contact:  
 pryor@pryorstone.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)