



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
829057-101295
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | GFL0102945 | GFL0102987 | GFL0102971 |
| Sample Date | | Client Info | | 14 Apr 2024 | 24 Mar 2024 | 27 Feb 2024 |
| Machine Age | hrs | Client Info | | 11592 | 11447 | 11233 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >100 | 5 | 7 | 4 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | >4 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 3 | 4 | 3 |
| Lead | ppm | ASTM D5185m | >40 | 0 | <1 | 0 |
| Copper | ppm | ASTM D5185m | >330 | 0 | <1 | <1 |
| Tin | ppm | ASTM D5185m | >15 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION

There is no indication of any contamination in the oil.


| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 3 | 5 | 3 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 2 | <1 |
| Fuel | | WC Method | >5 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.3 | 0.3 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 6.1 | 6.1 | 5.7 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 19.0 | 18.8 | 19.2 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | >216 | 1 | 1 | 3 |
| Boron | ppm | ASTM D5185m | 250 | 62 | 66 | 115 |
| Barium | ppm | ASTM D5185m | 10 | 0 | 1 | 0 |
| Molybdenum | ppm | ASTM D5185m | 100 | 76 | 77 | 84 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 450 | 999 | 915 | 904 |
| Calcium | ppm | ASTM D5185m | 3000 | 1204 | 1271 | 1274 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1101 | 1038 | 1060 |
| Zinc | ppm | ASTM D5185m | 1350 | 1291 | 1228 | 1219 |
| Sulfur | ppm | ASTM D5185m | 4250 | 3768 | 3459 | 3184 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 14.2 | 14.1 | 14.1 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.5 | 9.0 | 8.4 | 9.0 |
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 14.1 | 14.1 | 13.9 |


FT-IR (Direct Trend)

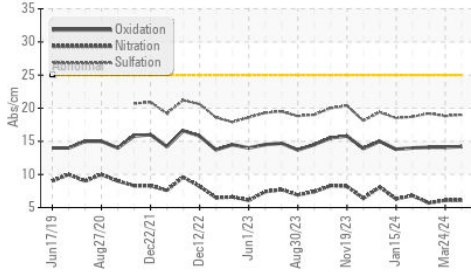


Base Number

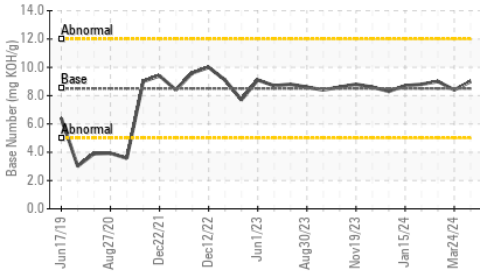


Viscosity @ 100°C

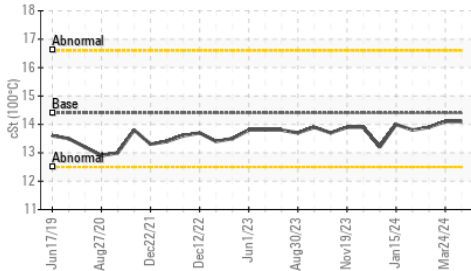


Ferrous Alloys

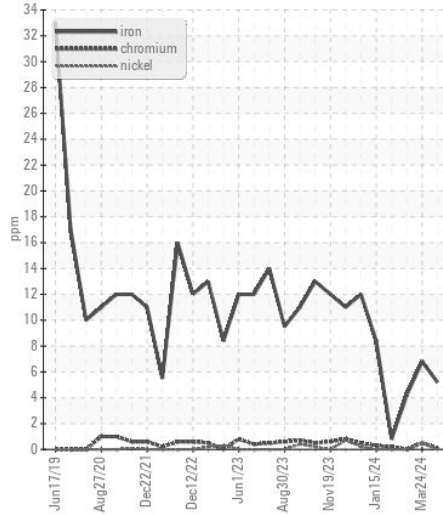


Non-ferrous Metals

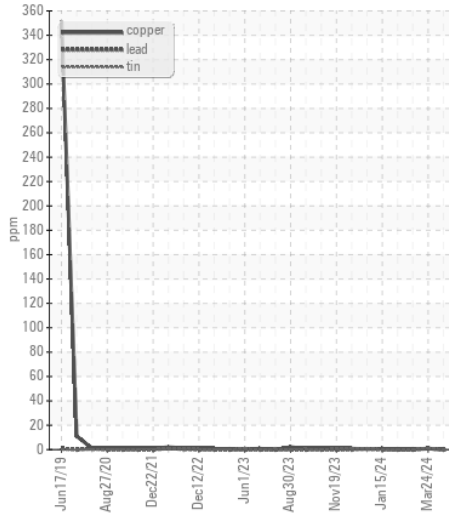

Viscosity @ 100°C

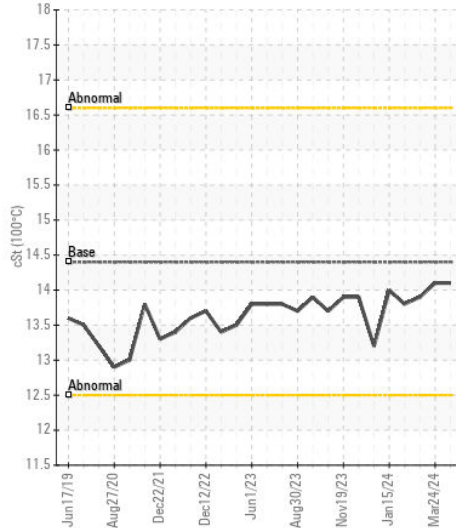

Base Number

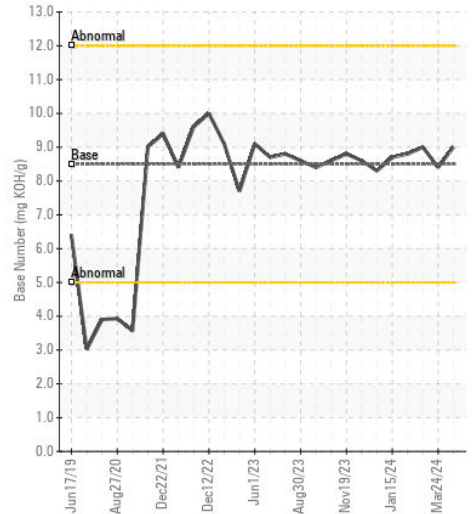

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0102945
Lab Number : 06149367
Unique Number : 10979445
Test Package : FLEET

Received : 15 Apr 2024
Tested : 16 Apr 2024
Diagnosed : 16 Apr 2024 - Wes Davis

GFL Environmental - 816 - WCA of South Arkansas
 3083 Smackover Hwy
 El Dorado, AR
 US 71730
 Contact: Mike Howell
 mike.howell@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: