



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
58954
Component
Diesel Engine
Fluid
EXXON 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0903581	WC0903523	WC0840121
Sample Date		Client Info		04 Apr 2024	30 Jan 2024	22 Jul 2023
Machine Age	mls	Client Info		337853	313089	293736
Oil Age	mls	Client Info		24764	10885	47033
Filter Age	mls	Client Info		24764	10885	47033
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	16	15	18
Chromium	ppm	ASTM D5185m	>20	<1	<1	1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	5	4	3
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	2	6	7
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	5	4	6
Potassium	ppm	ASTM D5185m	>20	3	2	4
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.5	0.6
Nitration	Abs/cm	*ASTM D7624	>20	7.7	9.5	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.0	20.9	22.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	<1	2
Boron	ppm	ASTM D5185m		156	6	17
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		73	68	56
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		481	1014	877
Calcium	ppm	ASTM D5185m		1244	1232	1238
Phosphorus	ppm	ASTM D5185m		1033	1093	978
Zinc	ppm	ASTM D5185m		1246	1387	1251
Sulfur	ppm	ASTM D5185m		3456	3361	3179
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.6	17.8	18.8
Base Number (BN)	mg KOH/g	ASTM D2896		5.2	7.9	7.2
Visc @ 100°C	cSt	ASTM D445	14.4	12.6	13.3	14.1


FT-IR (Direct Trend)

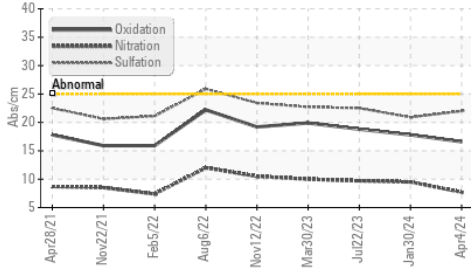


Base Number

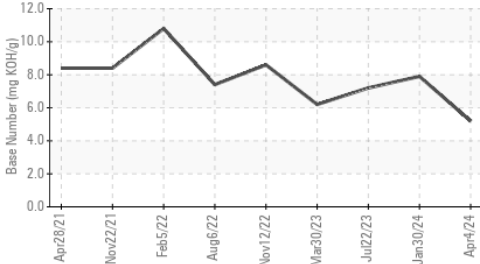


Viscosity @ 100°C

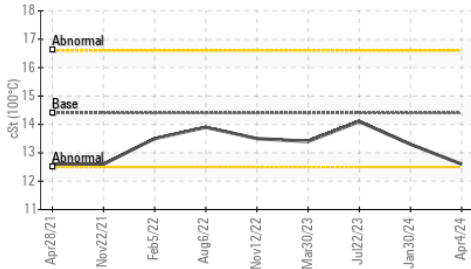


Ferrous Alloys

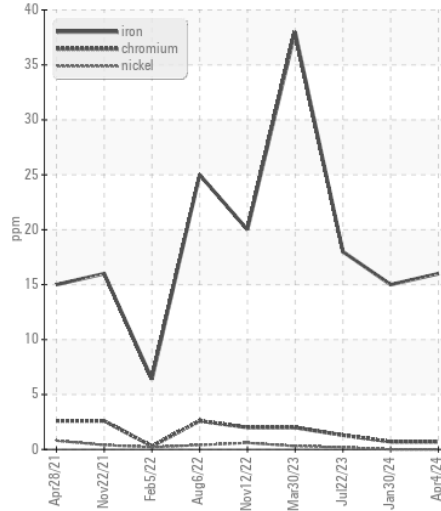


Non-ferrous Metals

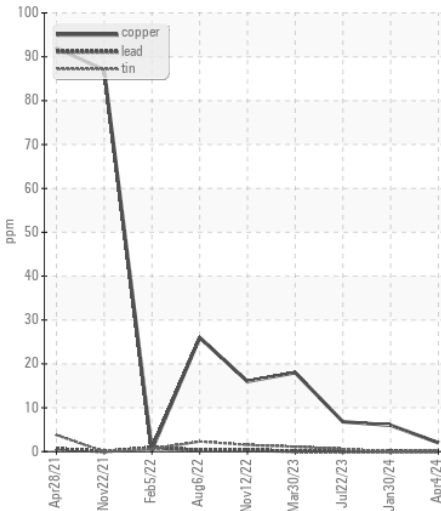

Viscosity @ 100°C

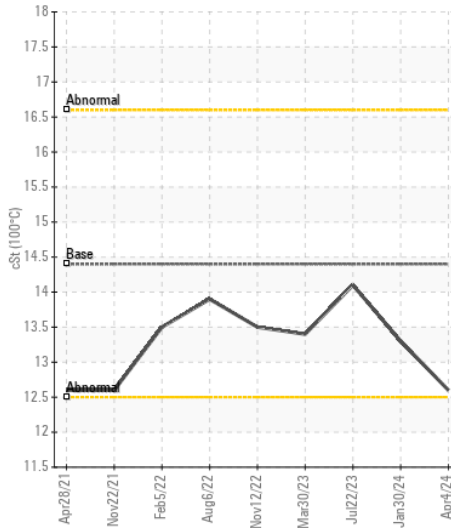

Base Number

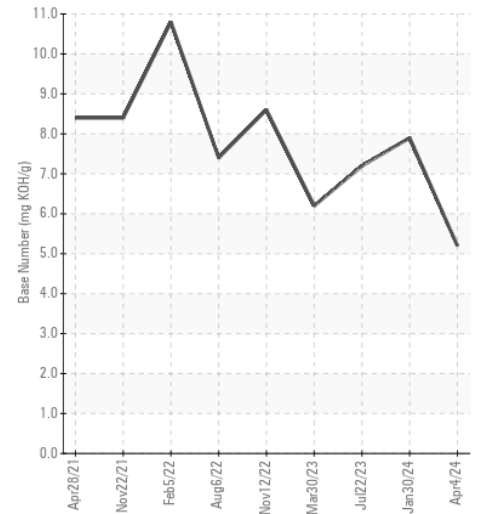

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0903581

Lab Number : 06149389

Unique Number : 10979467

Test Package : FLEET

Received : 15 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 17 Apr 2024 - Don Baldrige

SALEM NATIONALEASE CORPORATION

198 PARK PLAZA DRIVE

WINSTON SALEM, NC

US 27105

Contact: Audrey Hopkins

Audrey.Hopkins@salemcorp.com

T: (336)767-9642

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)