



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**FREIGHTLINER 25569**  
Component  
**Diesel Engine**  
Fluid  
**EXXON 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0903556</b>	WC0641005	WC0641000
Sample Date		Client Info		<b>27 Mar 2024</b>	11 Feb 2022	01 Feb 2022
Machine Age	mls	Client Info		<b>156061</b>	483219	483554
Oil Age	mls	Client Info		<b>24000</b>	0	0
Filter Age	mls	Client Info		<b>24000</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	N/A
Filter Changed		Client Info		<b>Changed</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>7</b>	16	14
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>4</b>	10	5
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>30	<b>3</b>	6	6
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	<b>3</b>	5	5
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	0	2
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.9	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.7</b>	10.5	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.7</b>	23.7	23.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	1	0
Boron	ppm	ASTM D5185m		<b>70</b>	0	2
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>66</b>	64	68
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>955</b>	1067	998
Calcium	ppm	ASTM D5185m		<b>1210</b>	1190	1186
Phosphorus	ppm	ASTM D5185m		<b>1171</b>	1102	1087
Zinc	ppm	ASTM D5185m		<b>1357</b>	1354	1358
Sulfur	ppm	ASTM D5185m		<b>4019</b>	2732	2496
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.8</b>	19.1	19.5
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.3</b>	9.2	8.5
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.4</b>	13.5	14.0


**FT-IR (Direct Trend)**

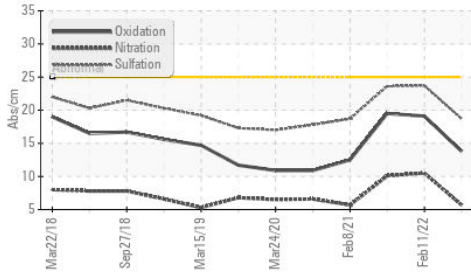


**Ferrous Alloys**

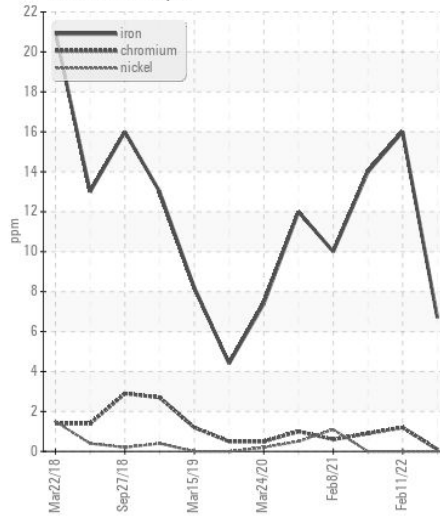


**Base Number**

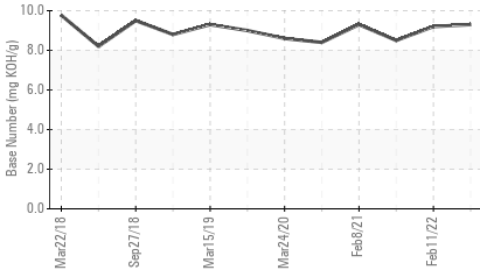


**Viscosity @ 100°C**

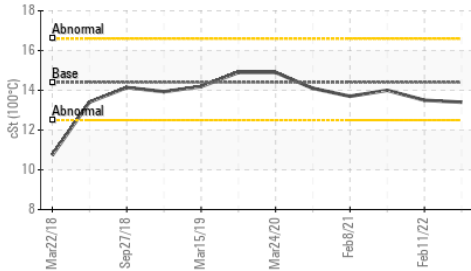


**Non-ferrous Metals**

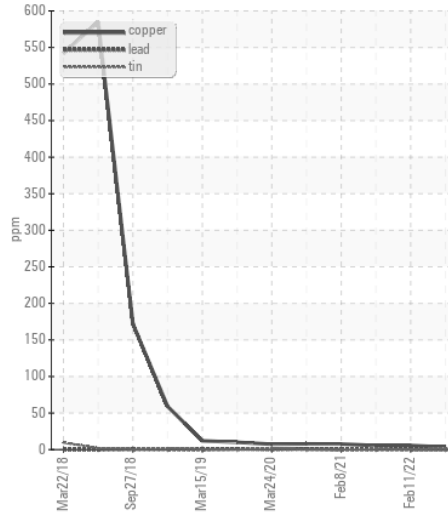

**Viscosity @ 100°C**

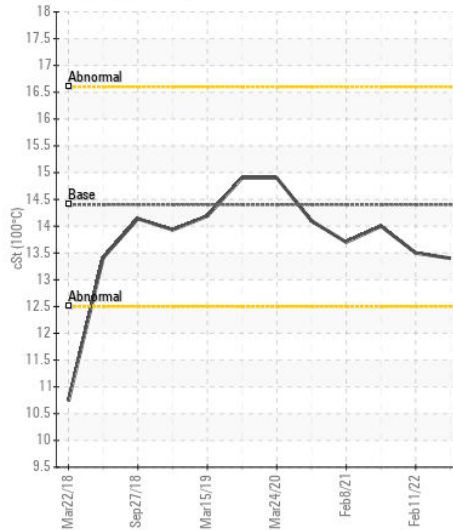

**Base Number**

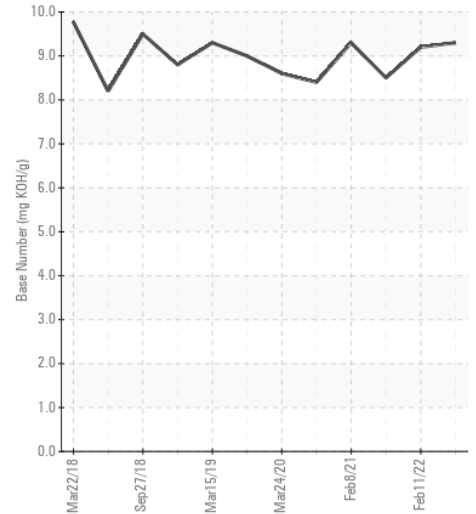

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0903556  
**Lab Number** : 06149405  
**Unique Number** : 10979483  
**Test Package** : FLEET

**SALEM NATIONALEASE CORPORATION**  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105  
 Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com  
 T: (336)767-9642  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)