



THE G. W. VAN KEPPEL CO.
Construction Equipment

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[ASH GROVE]

Machine Id

VOLVO L180H 230114 (S/N 5443)

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VKC0001210	VKC0000911	VKC0000748
Sample Date		Client Info		01 Apr 2024	02 Jun 2023	16 Mar 2023
Machine Age	hrs	Client Info		7416	5471	4958
Oil Age	hrs	Client Info		0	500	500
Filter Age	hrs	Client Info		0	500	500
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	8	5	6
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	0	1
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>20	1	1	1
Tin	ppm	ASTM D5185m	>20	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	5	3	6
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	8.6	7.3	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.4	23.0	22.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	2
Boron	ppm	ASTM D5185m	2.5	72	39	47
Barium	ppm	ASTM D5185m	0.0	0	2	0
Molybdenum	ppm	ASTM D5185m	0.7	45	43	44
Manganese	ppm	ASTM D5185m	0.0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	256	540	470	562
Calcium	ppm	ASTM D5185m	2057	1803	1657	1808
Phosphorus	ppm	ASTM D5185m	935	1002	926	1024
Zinc	ppm	ASTM D5185m	1223	1210	1119	1234
Sulfur	ppm	ASTM D5185m	4079	3386	3310	3583
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.5	22.0	20.1
Base Number (BN)	mg KOH/g	ASTM D2896	10	8.9	9.1	10.3
Visc @ 100°C	cSt	ASTM D445	15.0	12.8	12.9	12.9

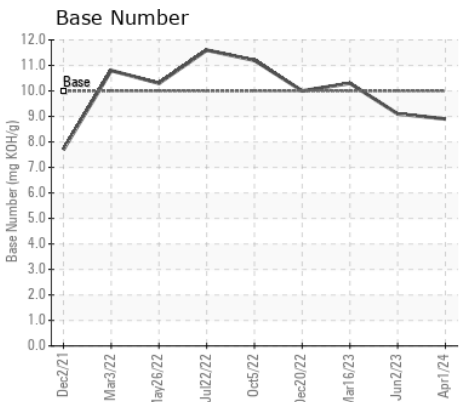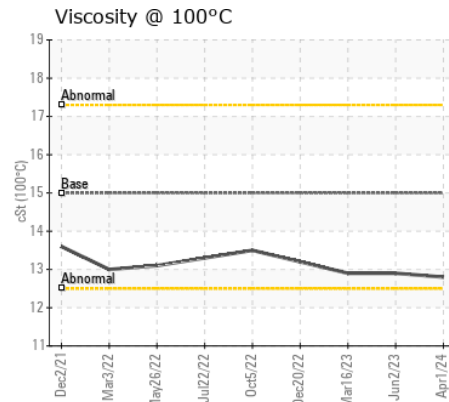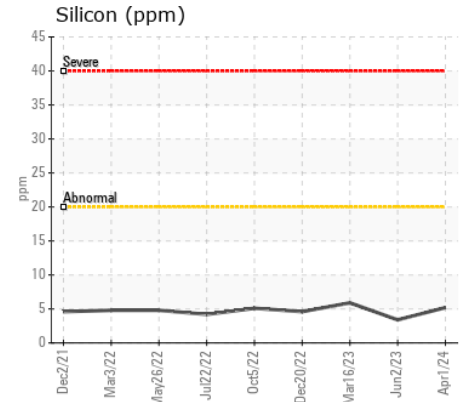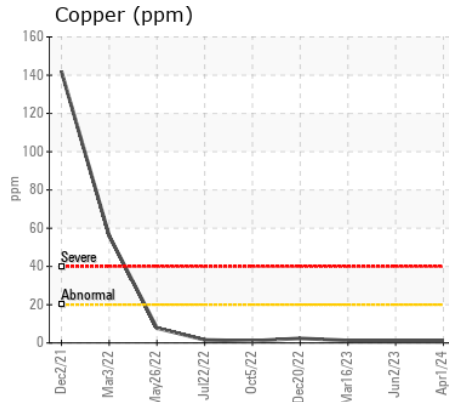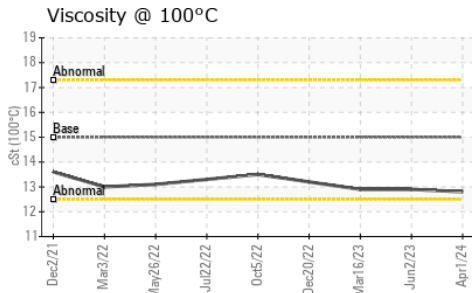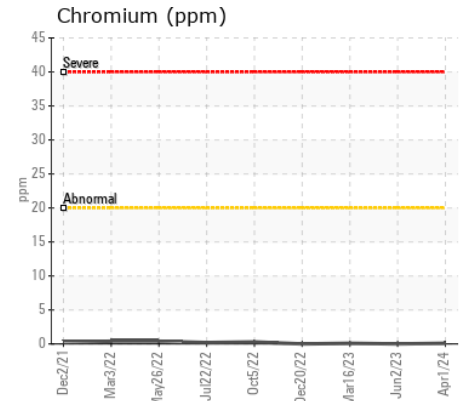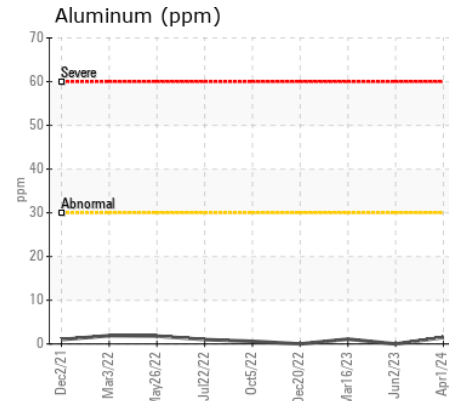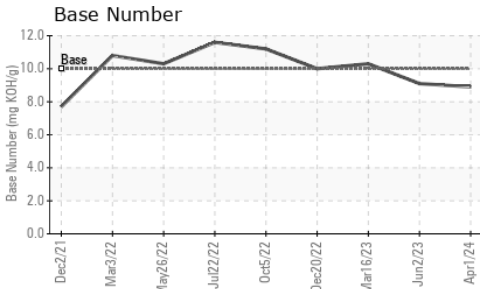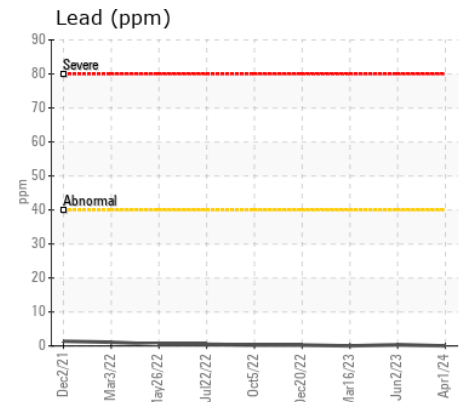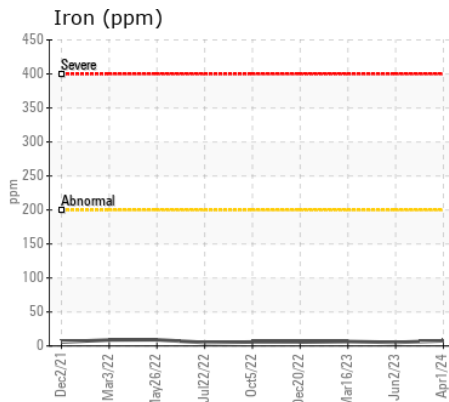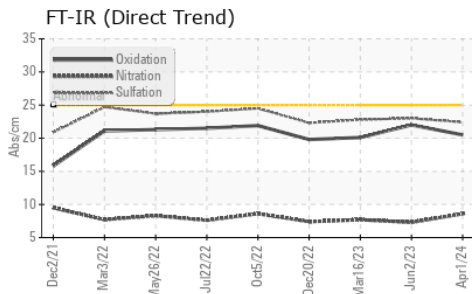

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VKC0001210 **Received** : 15 Apr 2024
Lab Number : 06149438 **Tested** : 16 Apr 2024
Unique Number : 10979516 **Diagnosed** : 16 Apr 2024 - Wes Davis
Test Package : MOBCE (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GW VAN KEPPEL CO
 1801 NORTH 9TH ST
 KANSAS CITY, KS
 US 66110
 Contact: PAT SAUSE
 psause@vankeppel.com
 T:
 F: (913)281-4815