



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[45836]**

Machine Id

**JOHN DEERE 850L 1T0850LXJPF445777**

Component

**Hydraulic System**

Fluid

**JOHN DEERE HYDRAU (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0211295</b>	JR0195974	JR0187562
Sample Date		Client Info		<b>11 Apr 2024</b>	04 Dec 2023	18 Sep 2023
Machine Age	hrs	Client Info		<b>1494</b>	972	459
Oil Age	hrs	Client Info		<b>1494</b>	972	0
Filter Age	hrs	Client Info		<b>0</b>	972	0
Oil Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Filter Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status				<b>NORMAL</b>	ABNORMAL	ATTENTION

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>18</b>	15	12
Iron	ppm	ASTM D5185m	>20	<b>1</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>75	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	<b>4</b>	5	<1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>5000	<b>3255</b>	▲ 10241	● 7242
Particles >6µm		ASTM D7647	>1300	<b>385</b>	838	1111
Particles >14µm		ASTM D7647	>160	<b>27</b>	45	43
Particles >21µm		ASTM D7647	>40	<b>5</b>	13	7
Particles >38µm		ASTM D7647	>10	<b>0</b>	1	1
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>19/16/12</b>	▲ 21/17/13	● 20/17/13
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	2	0
Boron	ppm	ASTM D5185m		<b>1</b>	2	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>2</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>3</b>	7	0
Calcium	ppm	ASTM D5185m	87	<b>891</b>	967	12
Phosphorus	ppm	ASTM D5185m	727	<b>680</b>	800	12
Zinc	ppm	ASTM D5185m	900	<b>804</b>	983	0
Sulfur	ppm	ASTM D5185m	1500	<b>2084</b>	2292	19
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.92</b>	0.85	2.371
Visc @ 40°C	cSt	ASTM D445	65	<b>53.9</b>	55.1	56.5

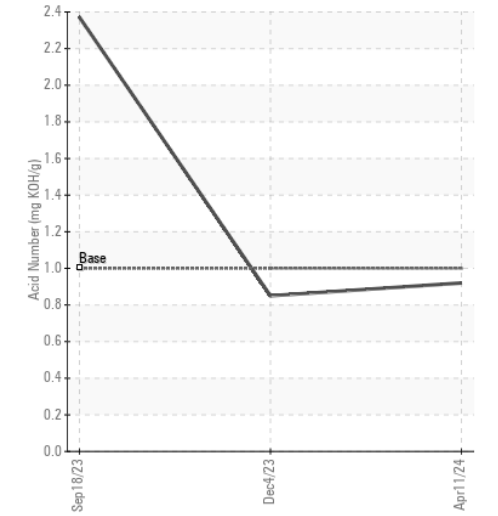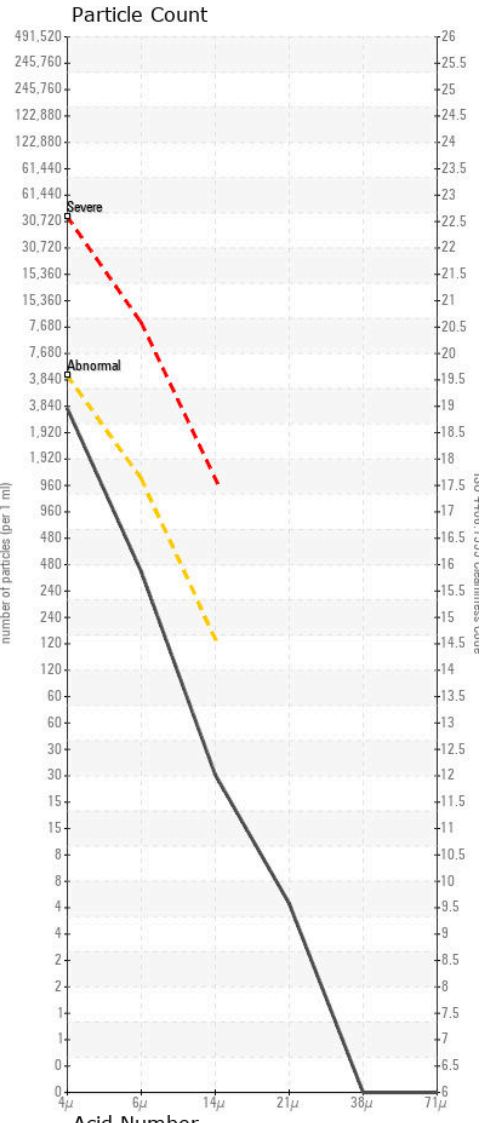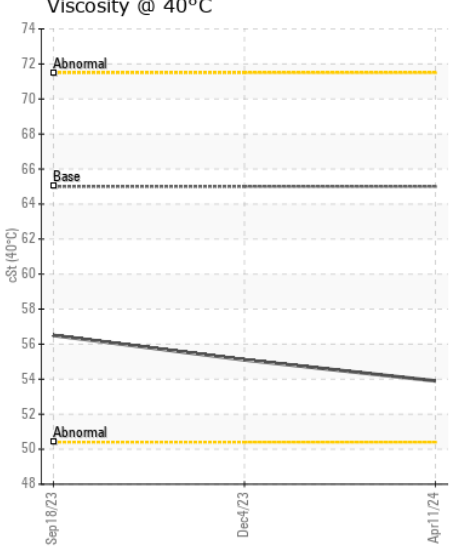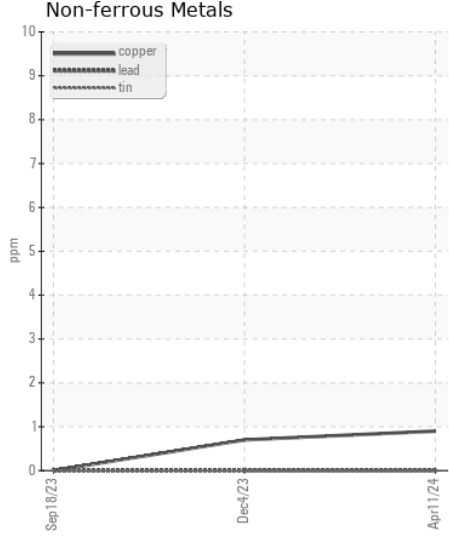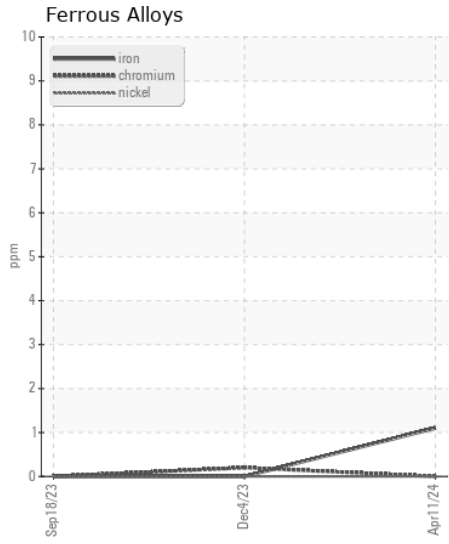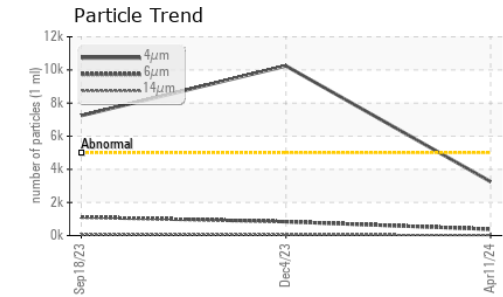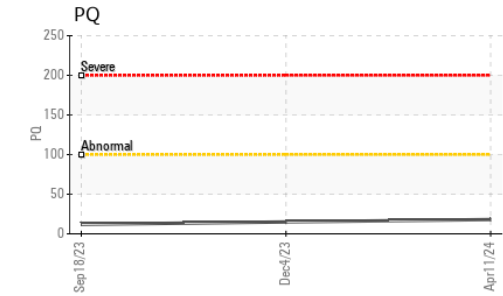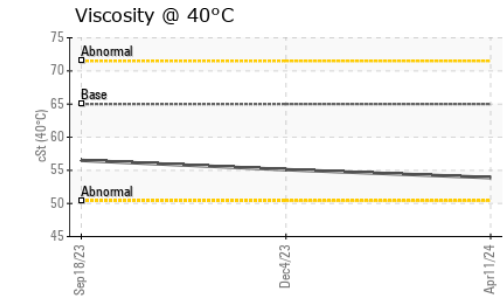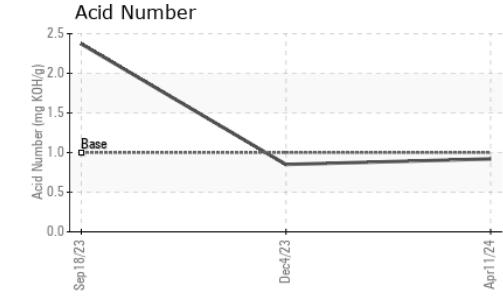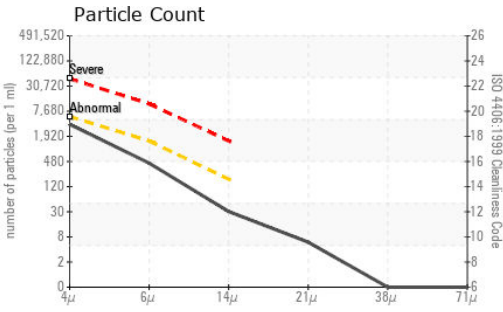

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0211295 **Received** : 15 Apr 2024  
**Lab Number** : 06149491 **Tested** : 16 Apr 2024  
**Unique Number** : 10979569 **Diagnosed** : 16 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**B & S SITE DEVELOPMENT**  
 7800 PINEY BRANCH LANE  
 BRISTOW, VA  
 US 20136  
 Contact: DANNY HUFF  
 dhuff@bandssite.com  
 T: (540)270-3203  
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)