



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 980M 6141 (S/N KRS00885)
Component
Front Left Final Drive
Fluid
TULCO LUBSOIL TO-4 50 (3 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10003321	TO10002986	TO10002802
Sample Date		Client Info		08 Apr 2024	01 Feb 2024	02 Nov 2023
Machine Age	hrs	Client Info		13425	12901	12384
Oil Age	hrs	Client Info		3623	3099	2582
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>500	201	---	178
Iron	ppm	ASTM D5185m	>800	352	427	378
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m	>15	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	2	2	2
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>75	17	19	15
Tin	ppm	ASTM D5185m	>8	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	14	16	15
Potassium	ppm	ASTM D5185m	>20	0	2	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	0	2
Boron	ppm	ASTM D5185m		<1	2	<1
Barium	ppm	ASTM D5185m		0	5	0
Molybdenum	ppm	ASTM D5185m		2	1	2
Manganese	ppm	ASTM D5185m		3	3	3
Magnesium	ppm	ASTM D5185m		15	20	20
Calcium	ppm	ASTM D5185m		2682	2929	2770
Phosphorus	ppm	ASTM D5185m		795	882	950
Zinc	ppm	ASTM D5185m		964	1202	1162
Sulfur	ppm	ASTM D5185m		4620	4893	4581
Acid Number (AN)	mg KOH/g	ASTM D8045		0.60	1.00	0.81
Visc @ 40°C	cSt	ASTM D445		205	204	206
Visc @ 100°C	cSt	ASTM D445		17.9	17.8	18.1
Viscosity Index (VI)	Scale	ASTM D2270		95	94	96

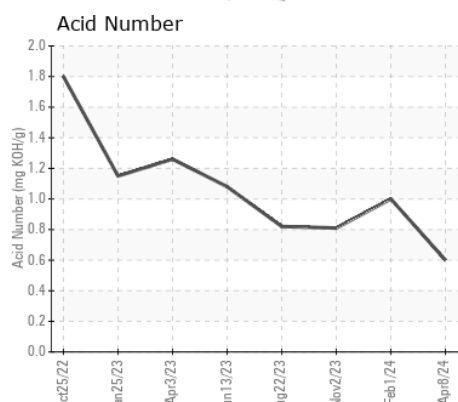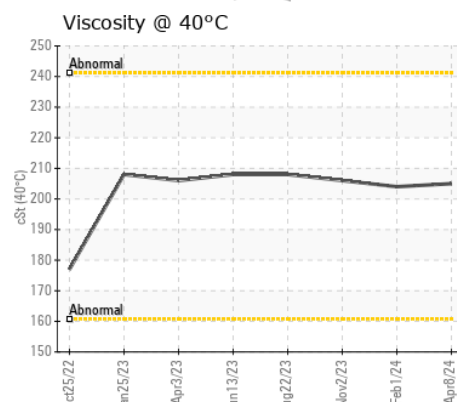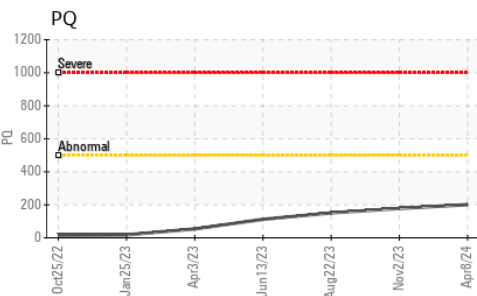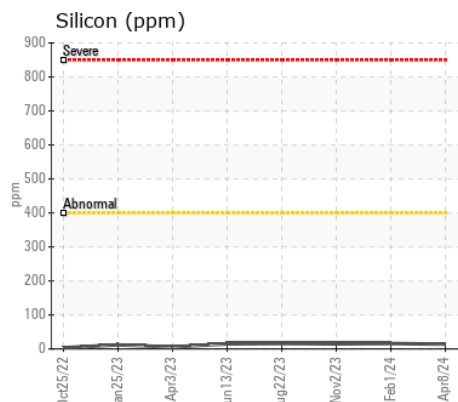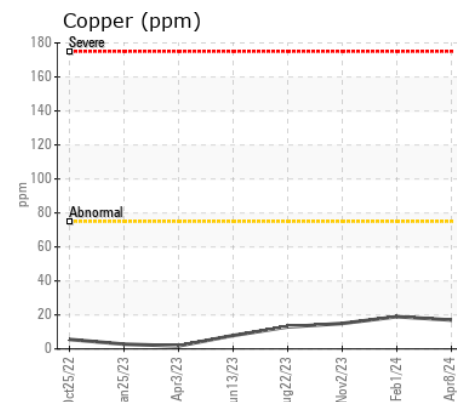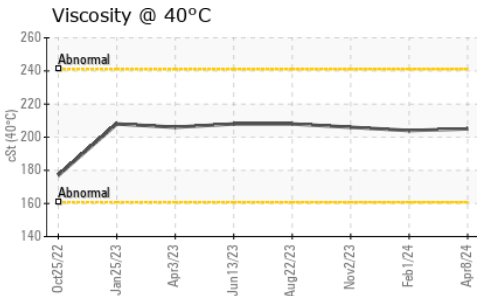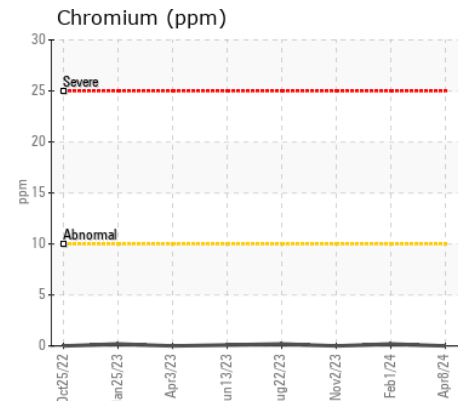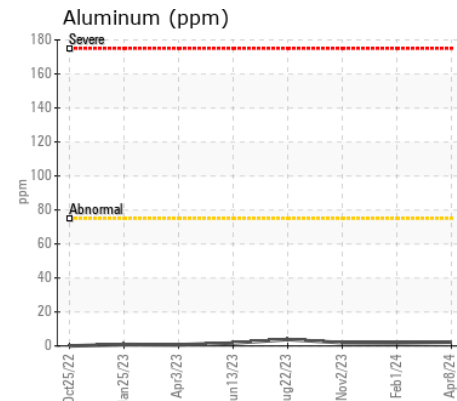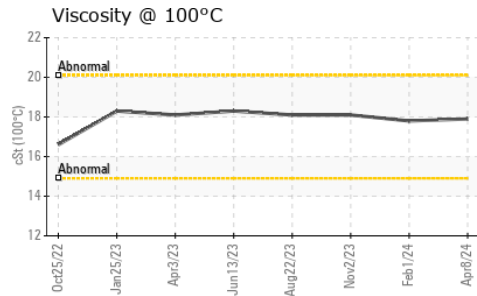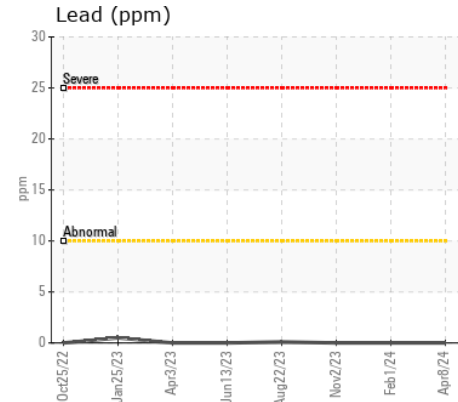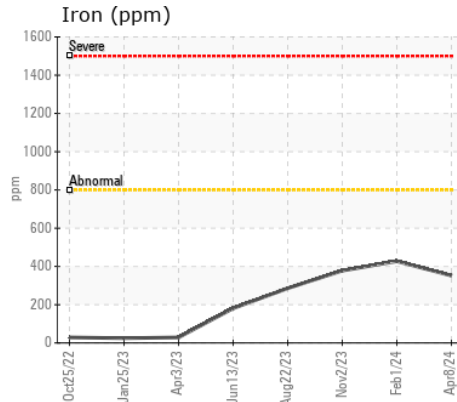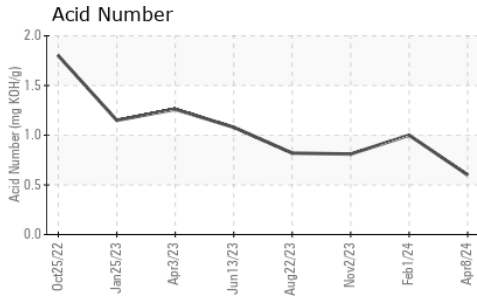

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003321
Lab Number : 06149571
Unique Number : 10979649
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: MIKE SNYDER
 msnyder@anchorstoneco.com
 T: (417)850-9635
 F: